



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R630
(Intel Xeon X5355,2.66GHz)

SPECfp[®]2006 = 18.0

SPECfp_base2006 = 13.8

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Oct-2007

Software Availability: Feb-2008

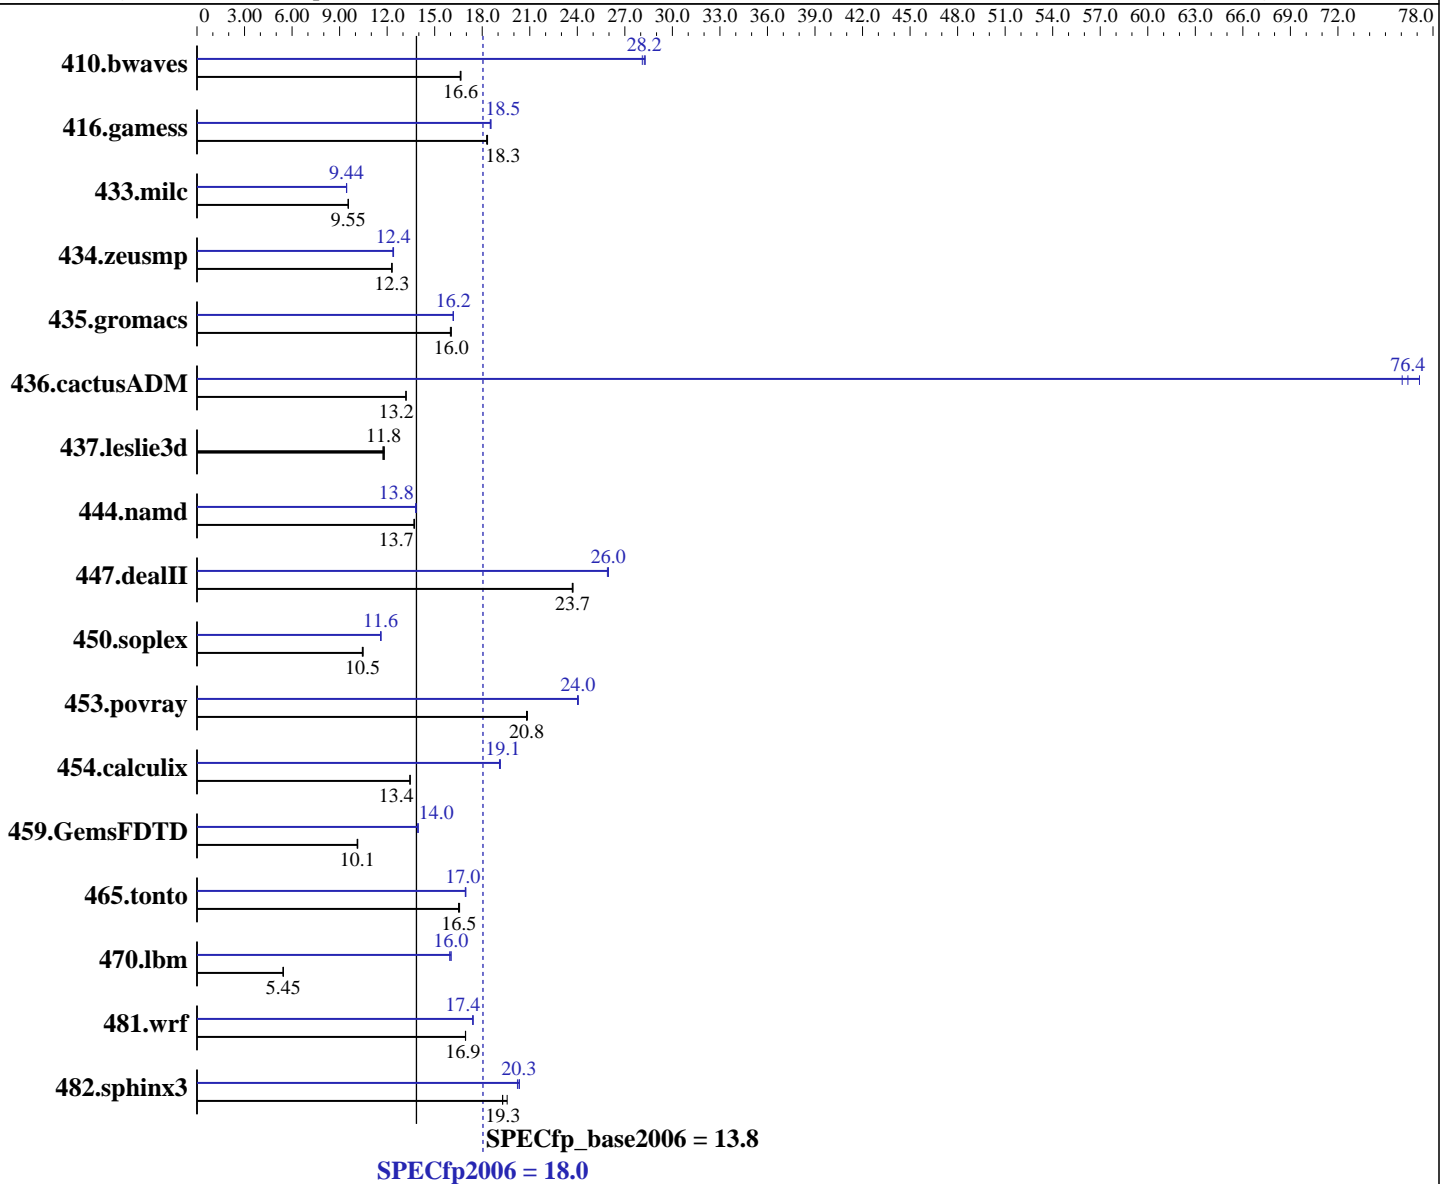

Hardware

CPU Name: Intel Xeon X5355
 CPU Characteristics: 2.66 GHz, 2x4 MB L2 shared, 1333 MHz bus
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

Software

Operating System: Red Hat Enterprise Linux AS release4 (Update 5), Kernel 2.6.9-55.0.12.ELsmp on an X86_64
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64
 version 10.1 Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R630
(Intel Xeon X5355,2.66GHz)

SPECfp2006 = **18.0**

SPECfp_base2006 = **13.8**

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Oct-2007
Software Availability: Feb-2008

L3 Cache: None
Other Cache: None
Memory: 12 GB (6x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 2x73.2 GB SAS, 15000RPM, Software RAID Level1
Other Hardware: None

File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.tar.gz, Version 2.17
ft Server Control Software 5.0-0231

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	818	16.6	816	16.6	816	16.7	481	28.2	484	28.1	480	28.3
416.gamess	1068	18.3	1068	18.3	1071	18.3	1058	18.5	1056	18.5	1056	18.5
433.milc	961	9.55	963	9.53	961	9.55	973	9.43	972	9.44	972	9.44
434.zeusmp	739	12.3	740	12.3	741	12.3	736	12.4	735	12.4	734	12.4
435.gromacs	445	16.0	445	16.0	447	16.0	442	16.2	441	16.2	441	16.2
436.cactusADM	906	13.2	906	13.2	905	13.2	155	77.1	156	76.4	157	76.1
437.leslie3d	795	11.8	798	11.8	801	11.7	795	11.8	798	11.8	801	11.7
444.namd	585	13.7	584	13.7	586	13.7	581	13.8	581	13.8	580	13.8
447.dealII	482	23.7	482	23.7	483	23.7	441	26.0	442	25.9	441	26.0
450.soplex	796	10.5	799	10.4	798	10.5	718	11.6	719	11.6	720	11.6
453.povray	255	20.9	256	20.8	256	20.8	222	24.0	221	24.0	221	24.1
454.calculix	614	13.4	613	13.4	614	13.4	432	19.1	431	19.1	431	19.1
459.GemsFDTD	1046	10.1	1048	10.1	1050	10.1	760	14.0	760	14.0	762	13.9
465.tonto	594	16.6	595	16.5	596	16.5	580	17.0	580	17.0	581	16.9
470.lbm	2518	5.46	2534	5.42	2521	5.45	857	16.0	862	15.9	857	16.0
481.wrf	659	16.9	659	16.9	659	16.9	641	17.4	642	17.4	642	17.4
482.sphinx3	996	19.6	1011	19.3	1010	19.3	958	20.3	959	20.3	964	20.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores

Platform Notes

This Express5800/320Fc-MR is a fault-tolerant server.
Two modules are installed in this server and each module has "2CPU chips,12GB memory",
so total "4CPU chips,24GB memory" are on this server.
With lockstep technology, these two modules communicate each other
and handle the same instructions at the same time,
then logically the "CPU,Memory" is recognized as "2CPU chips,12GB memory" by the OS.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R630
(Intel Xeon X5355,2.66GHz)

SPECfp2006 = 18.0

SPECfp_base2006 = 13.8

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Oct-2007
Software Availability: Feb-2008

General Notes

All benchmarks compiled in 64-bit mode except 450.soplex, 470.lbm and 482.sphinx3, for peak, are compiled in 32-bit mode

The NEC Express5800/320Fc-MR(Intel Xeon X5355) and the Bull NovaScale R630 (Intel Xeon X5355,2.66GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/320Fc-MR(Intel Xeon X5355) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R630
(Intel Xeon X5355,2.66GHz)

SPECfp2006 = 18.0

SPECfp_base2006 = 13.8

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Oct-2007
Software Availability: Feb-2008

Base Optimization Flags (Continued)

C++ benchmarks:
-fast

Fortran benchmarks:
-fast

Benchmarks using both Fortran and C:
-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R630
(Intel Xeon X5355,2.66GHz)

SPECfp2006 = 18.0

SPECfp_base2006 = 13.8

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Apr-2008
Hardware Availability: Oct-2007
Software Availability: Feb-2008

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R630
(Intel Xeon X5355,2.66GHz)

SPECfp2006 = 18.0

SPECfp_base2006 = 13.8

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Apr-2008

Hardware Availability: Oct-2007

Software Availability: Feb-2008

Peak Optimization Flags (Continued)

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-FP-intel64-linux-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:25:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.