



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun Fire X2200 M2

SPECfp®_rate2006 = 81.1

SPECfp_rate_base2006 = 74.7

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

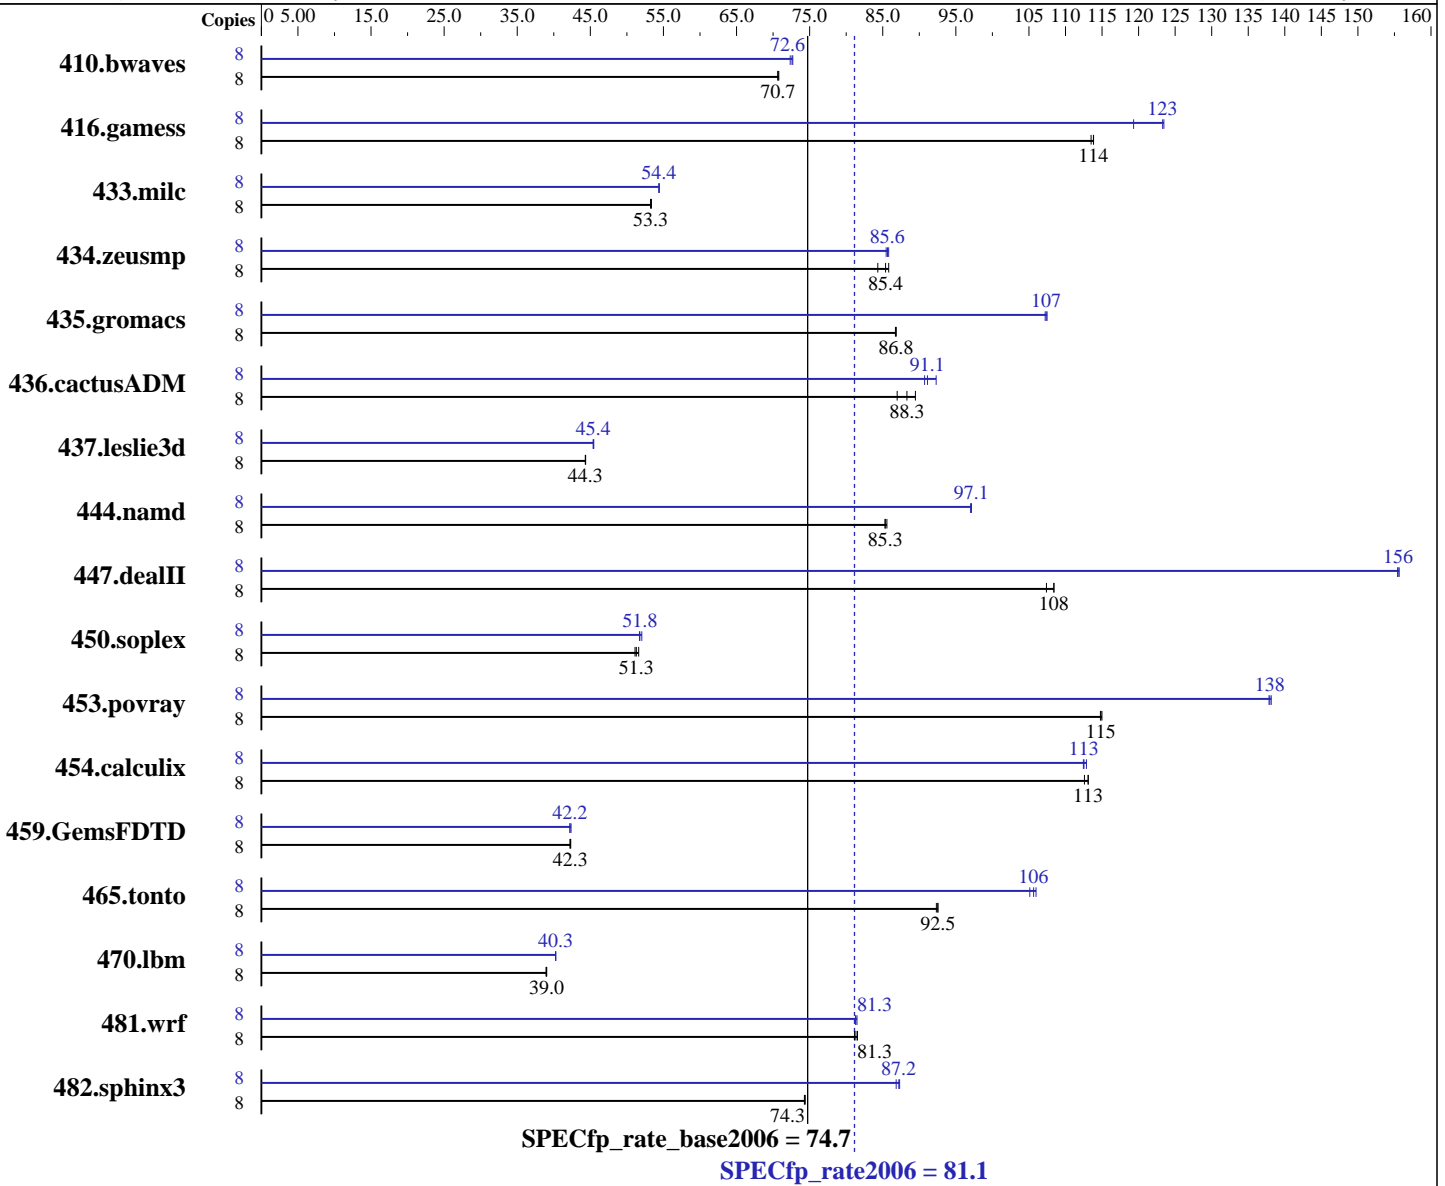

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ext3
 System State: Runlevel 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECfp_rate2006 = 81.1

SPECfp_rate_base2006 = 74.7

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem: SAS, 72 GB, 10 K RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1536	70.8	1539	70.6	1538	70.7	8	1496	72.7	1498	72.6	1503	72.3
416.gamess	8	1376	114	1376	114	1380	114	8	1313	119	1269	123	1271	123
433.milc	8	1376	53.4	1379	53.3	1379	53.3	8	1350	54.4	1350	54.4	1350	54.4
434.zeusmp	8	848	85.8	863	84.3	853	85.4	8	850	85.6	852	85.5	848	85.8
435.gromacs	8	658	86.8	659	86.7	658	86.8	8	533	107	531	107	532	107
436.cactusADM	8	1069	89.5	1083	88.3	1099	87.0	8	1054	90.7	1036	92.3	1049	91.1
437.leslie3d	8	1695	44.4	1696	44.3	1697	44.3	8	1654	45.5	1656	45.4	1656	45.4
444.namd	8	752	85.3	752	85.3	750	85.6	8	661	97.1	661	97.0	660	97.1
447.dealII	8	844	108	844	108	852	107	8	589	155	589	156	588	156
450.soplex	8	1293	51.6	1301	51.3	1305	51.1	8	1290	51.7	1282	52.0	1289	51.8
453.povray	8	371	115	370	115	371	115	8	308	138	308	138	309	138
454.calculix	8	586	113	583	113	584	113	8	585	113	587	112	587	113
459.GemsFDTD	8	2008	42.3	2010	42.2	2006	42.3	8	2011	42.2	2004	42.4	2011	42.2
465.tonto	8	853	92.3	851	92.5	851	92.5	8	743	106	749	105	745	106
470.lbm	8	2817	39.0	2823	38.9	2817	39.0	8	2730	40.3	2731	40.2	2730	40.3
481.wrf	8	1096	81.5	1099	81.3	1101	81.1	8	1097	81.5	1099	81.3	1100	81.3
482.sphinx3	8	2096	74.4	2097	74.3	2099	74.3	8	1788	87.2	1796	86.8	1786	87.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

Default BIOS settings were used.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECfp_rate2006 = 81.1

SPECfp_rate_base2006 = 74.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECfp_rate2006 = 81.1

SPECfp_rate_base2006 = 74.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-w
```

C++ benchmarks:

```
-w
```

Fortran benchmarks:

```
-w
```

Benchmarks using both Fortran and C:

```
-w
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
pathcc
```

```
433.milc: pgcc
```

C++ benchmarks (except as noted below):

```
pathCC
```

```
444.namd: pgcpp
```

Fortran benchmarks (except as noted below):

```
pathf95
```

```
410.bwaves: pgf95
```

```
434.zeusmp: pgf95
```

Benchmarks using both Fortran and C (except as noted below):

```
pgcc pgf95
```

```
436.cactusADM: pathcc pathf95
```

```
481.wrf: pathcc pathf95
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECfp_rate2006 = 81.1
SPECfp_rate_base2006 = 74.7

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
-Mipa=shape -tp barcelona-64 -Bstatic_pgi
```

```
470.lbm: -march=barcelona -Ofast -m3dnow
```

```
482.sphinx3: -march=barcelona -Ofast
```

C++ benchmarks:

```
444.namd: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
-Munroll=m:8 -tp barcelona-64 -Bstatic_pgi
```

```
447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions
```

```
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1
```

```
453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0
```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECfp_rate2006 = 81.1

SPECfp_rate_base2006 = 74.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Optimization Flags (Continued)

410.bwaves: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll_size=256
-CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnow
-LANG:copyinout=off -IPA:callee_limit=5000

Peak Other Flags

C benchmarks:

433.milc: -w

C++ benchmarks:

444.namd: -w

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X2200 M2

SPECfp_rate2006 = 81.1

SPECfp_rate_base2006 = 74.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Other Flags (Continued)

Fortran benchmarks:

410.bwaves: -w

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:34:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 June 2008.