



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 813

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECfp_rate_base2006 = 681

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

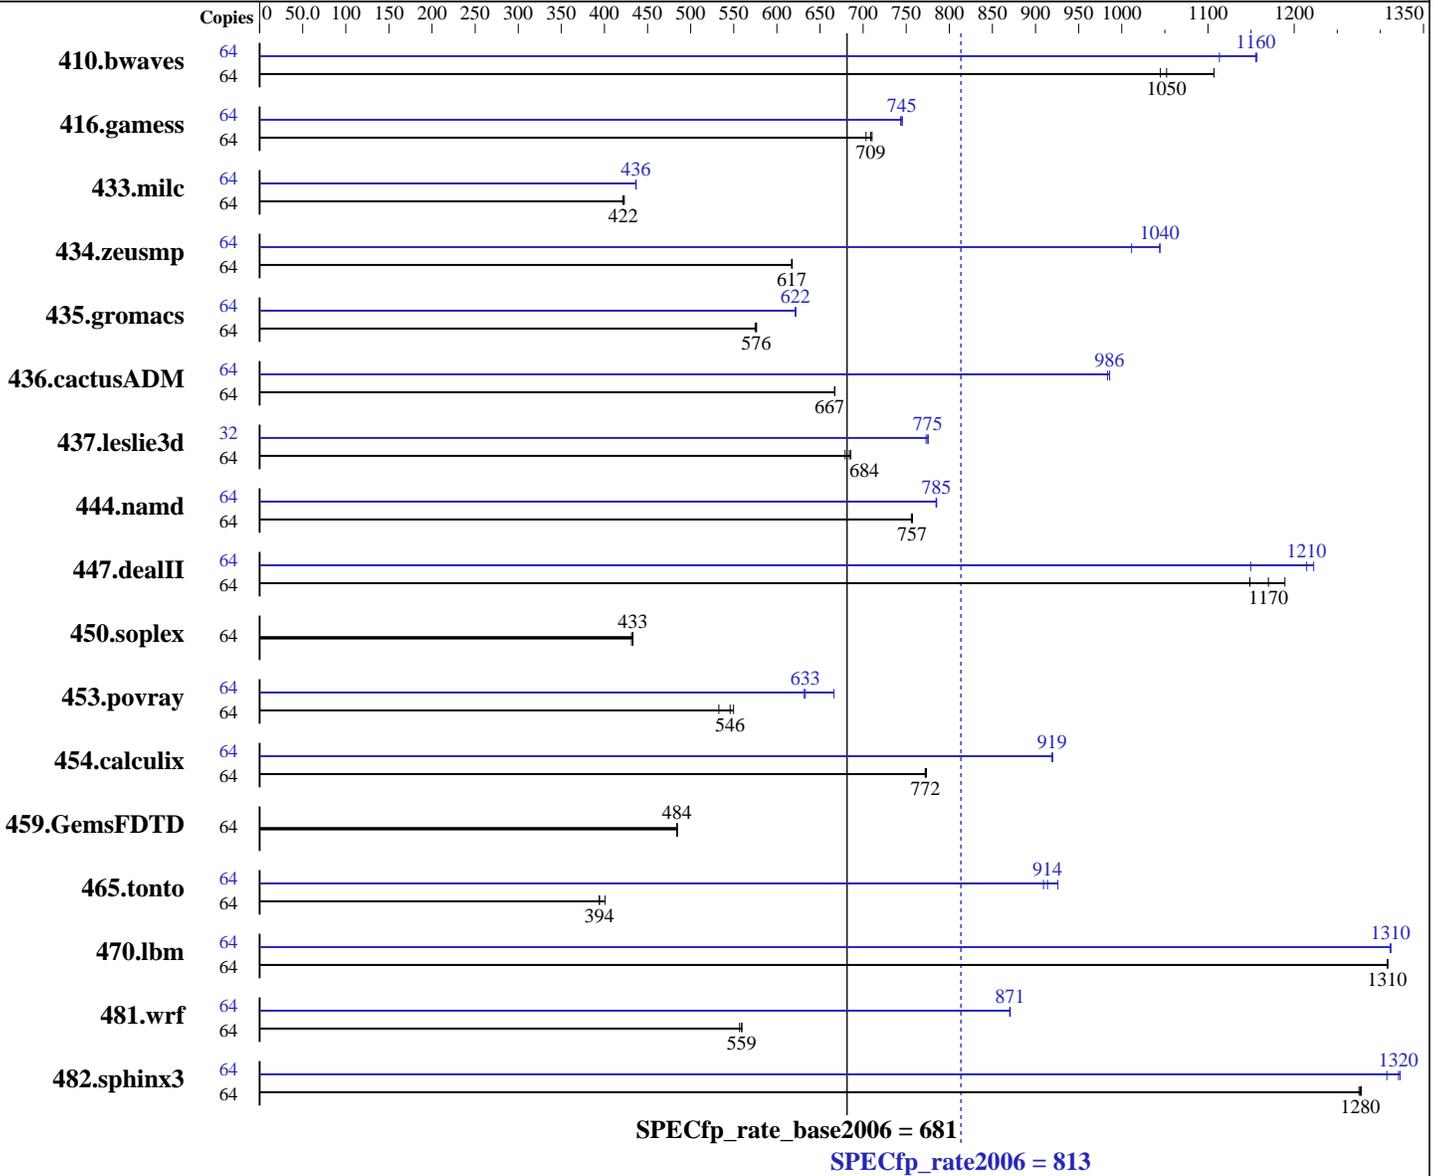

Hardware

CPU Name: POWER6
 CPU Characteristics:
 CPU MHz: 4700
 FPU: Integrated
 CPU(s) enabled: 32 cores, 16 chips, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 32 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Advanced Platform 5.2 for IBM POWER
 Compiler: IBM XL C/C++ Advanced Edition for Linux, V9.0
 IBM XL Fortran Advanced Edition for Linux, V11.1
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **813**

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECfp_rate_base2006 = **681**

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 128 GB (64x2 GB) DDR2 533 MHz
 Disk Subsystem: 2x146 GB SFF SAS 10K RPM
 Other Hardware: None

Other Software: -IBM Post-Link Optimization for Linux on POWER, Version 5.4.0-17
 -MicroQuill SmartHeap 8.1
 -IBM Engineering and Scientific Subroutine Library for Linux on POWER, Version 4.3

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	786	1110	827	1050	832	1040	64	781	1110	752	1160	753	1160
416.gamess	64	1768	709	1782	703	1764	710	64	1682	745	1681	746	1685	744
433.milc	64	1389	423	1393	422	1393	422	64	1346	436	1345	437	1346	436
434.zeusmp	64	943	618	943	617	944	617	64	558	1040	558	1040	576	1010
435.gromacs	64	793	576	793	576	795	575	64	735	622	736	621	735	622
436.cactusADM	64	1147	667	1146	667	1146	667	64	776	986	778	984	776	986
437.leslie3d	64	879	684	886	679	877	686	32	388	776	388	775	389	773
444.namd	64	678	757	679	756	678	757	64	654	785	654	785	654	785
447.dealII	64	616	1190	637	1150	626	1170	64	599	1220	637	1150	603	1210
450.soplex	64	1233	433	1237	431	1233	433	64	1233	433	1237	431	1233	433
453.povray	64	619	550	639	533	624	546	64	538	633	511	666	539	632
454.calculix	64	684	772	684	772	683	773	64	574	919	574	919	574	920
459.GemsFDTD	64	1403	484	1402	484	1402	484	64	1403	484	1402	484	1402	484
465.tonto	64	1598	394	1598	394	1571	401	64	680	926	689	914	693	909
470.lbm	64	672	1310	672	1310	672	1310	64	670	1310	670	1310	670	1310
481.wrf	64	1278	559	1279	559	1284	557	64	821	871	822	870	821	871
482.sphinx3	64	976	1280	978	1280	977	1280	64	954	1310	944	1320	943	1320

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

kernel release 2.6.18-91.el5.

See flags file for details on following settings.

ulimit -s (stack) set to 1048576.

System set to Enhanced mode when defining partition on HMC
 System set to "Chip affinity" mode using the HMC command
 chsyscfg ... -i "addr_broadcast_perf_policy=chip_affinity"
 Large pages reserved as follows by root user:
 echo 4240 > /proc/sys/vm/nr_hugepages
 System configured with libhugetlbfs library for application access to large pages
 Environment variables set before executing benchmarks.
 export HUGETLB_VERBOSE=0

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 813

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECfp_rate_base2006 = 681

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

General Notes (Continued)

```
export HUGETLB_MORECORE=yes
export XLFRTEOPTS=intrinthds=1
```

IBM Post-Link optimization tool used for
433.milc 435.gromacs 436.cactusADM 453.povray 465.tonto 482.sphinx3

Benchmarks bound to a processor using numactl on the submit command.

Base Compiler Invocation

C benchmarks:

```
xlc -qlanglvl=extc99
```

C++ benchmarks:

```
xlC
```

Fortran benchmarks:

```
xlF95
```

Benchmarks using both Fortran and C:

```
xlc -qlanglvl=extc99 xlF95
```

Base Portability Flags

```
410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-O5 -qnoenablevmx -lhugetlbfs
```

C++ benchmarks:

```
-O5 -qrtti -qnoenablevmx -qstaticlink
```

Fortran benchmarks:

```
-O5 -qsmallstack=dynlenonheap -qalias=nostd -qnoenablevmx
-B/usr/share/libhugetlbfs/ -t1 -Wl,--hugetlbfs-link=BDT
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 813

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECfp_rate_base2006 = 681

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-O5 -qnoenablevmx -qsmallstack=dynlenonheap -qalias=nostd
-B/usr/share/libhugetlbfs/ -t1 -Wl,--hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

Peak Compiler Invocation

C benchmarks:

xlc -qlanglvl=extc99

C++ benchmarks:

xlC

Fortran benchmarks:

xlF95

Benchmarks using both Fortran and C:

xlc -qlanglvl=extc99 xlF95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE
482.sphinx3: -qchars=signed



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 813

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECfp_rate_base2006 = 681

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Optimization Flags

C benchmarks:

433.milc: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qnoenablevmx
-lhugetlbfs

470.lbm: -O3 -qarch=pwr6e -qtune=pwr6 -B/usr/share/libhugetlbfs/
-tl -Wl, --hugetlbfs-link=BDT -q64

482.sphinx3: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O4 -lhugetlbfs

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6e -qtune=pwr6

447.dealII: -O5 -qrtti -qnoenablevmx -qstaticlink
-Wl, --whole-archive /usr/lib/libsmartheap.a
-Wl, --no-whole-archive

450.soplex: basepeak = yes

453.povray: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -lsmartheap

Fortran benchmarks:

410.bwaves: -O5 -qsmallstack=dynlenonheap -lhugetlbfs

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd
-qnoenablevmx

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6e -qtune=pwr6
-qxlf90=nosignedzero -B/usr/share/libhugetlbfs/ -tl
-Wl, --hugetlbfs-link=BDT

437.leslie3d: -O3 -qarch=pwr6e -qtune=pwr6 -B/usr/share/libhugetlbfs/
-tl -Wl, --hugetlbfs-link=BDT -q64

459.GemsFDTD: basepeak = yes

465.tonto: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qessl -q64
-lessl -lsmartheap -lxlf90_r

Benchmarks using both Fortran and C:

435.gromacs: -Wl, -q -O2 -qarch=pwr6e -qtune=pwr6 -lhugetlbfs

436.cactusADM: -Wl, -q -qpdf1(pass 1) -qpdf2(pass 2) -O2 -qarch=pwr6e
-qtune=pwr6 -qnostrict -lhugetlbfs

454.calculix: -qpdf1(pass 1) -qpdf2(pass 2) -O4
-B/usr/share/libhugetlbfs/ -tl -Wl, --hugetlbfs-link=BDT

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 813

IBM Power 575 (4.7 GHz, 32 core, RedHat)

SPECfp_rate_base2006 = 681

CPU2006 license: 11

Test date: May-2008

Test sponsor: IBM Corporation

Hardware Availability: May-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Optimization Flags (Continued)

481.wrf: -O5 -qnoenablevmx -q64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads

C++ benchmarks:

-qipa=noobject -qipa=threads

Fortran benchmarks:

-qipa=noobject -qipa=threads

Benchmarks using both Fortran and C:

-qipa=noobject -qipa=threads

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20090713.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-Linux-XL.20090713.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 17:49:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 June 2008.