



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5420, 2.50 GHz)

SPECint®_rate2006 = 63.0

SPECint_rate_base2006 = 53.1

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: May-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

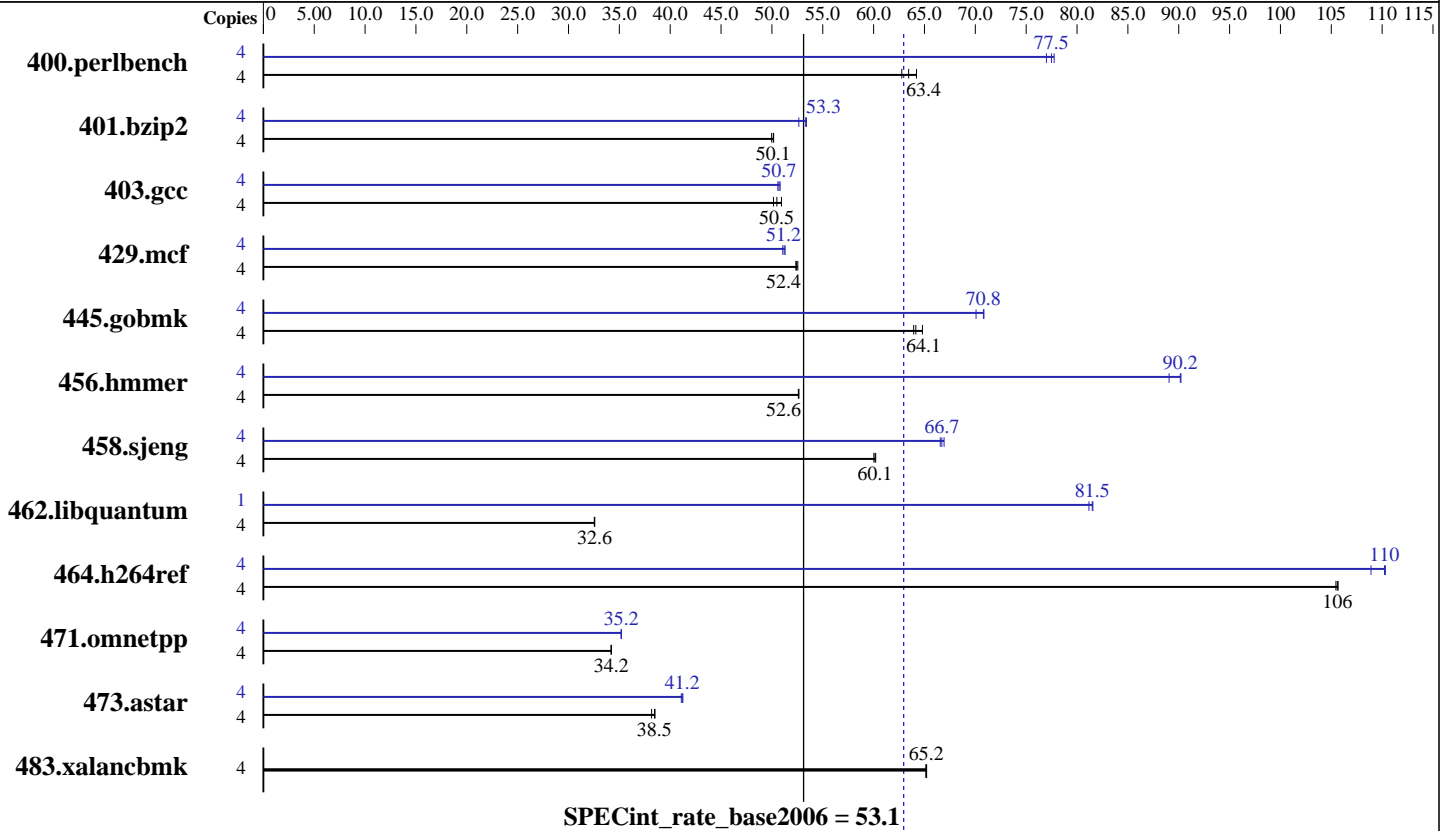

Hardware

CPU Name: Intel Xeon E5420
 CPU Characteristics: 2.50 GHz, 2x6 MB L2 shared, 1333 MHz bus
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x73.2 GB SAS, 15000RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 version 10.1 Build 20070913 Package ID: L_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5420, 2.50 GHz)

SPECint_rate2006 = 63.0

SPECint_rate_base2006 = 53.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: May-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	623	62.8	609	64.2	616	63.4	4	503	77.8	504	77.5	508	77.0
401.bzip2	4	772	50.0	770	50.1	769	50.2	4	733	52.6	723	53.4	724	53.3
403.gcc	4	642	50.2	638	50.5	632	50.9	4	635	50.7	637	50.6	634	50.8
429.mcf	4	694	52.5	696	52.4	697	52.4	4	712	51.2	711	51.3	714	51.1
445.gobmk	4	648	64.8	654	64.1	656	63.9	4	592	70.8	593	70.8	599	70.1
456.hmmer	4	709	52.6	710	52.6	709	52.6	4	414	90.2	414	90.2	419	89.1
458.sjeng	4	805	60.1	804	60.2	806	60.0	4	727	66.6	726	66.7	723	66.9
462.libquantum	4	2545	32.6	2547	32.5	2545	32.6	1	254	81.6	255	81.2	254	81.5
464.h264ref	4	838	106	838	106	839	105	4	803	110	802	110	813	109
471.omnetpp	4	731	34.2	731	34.2	731	34.2	4	710	35.2	710	35.2	710	35.2
473.astar	4	730	38.5	736	38.2	729	38.5	4	681	41.2	682	41.2	683	41.1
483.xalancbmk	4	423	65.2	423	65.2	424	65.1	4	423	65.2	423	65.2	424	65.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores

Platform Notes

Bios settings:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Disabled
Intel SpeedStep Technology: Disabled

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2, 456.hmmer, for peak, are compiled in 64-bit mode

The NEC Express5800/120Lj(Intel Xeon E5420) and the Bull NovaScale T860 E1(Intel Xeon E5420,2.50GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/120Lj(Intel Xeon E5420) model.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5420, 2.50 GHz)

SPECint_rate2006 = 63.0

SPECint_rate_base2006 = 53.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: May-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc
-L/opt/intel/cce/10.1.008/lib
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5420, 2.50 GHz)

SPECint_rate2006 = 63.0

SPECint_rate_base2006 = 53.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: May-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
403.gcc: -fast -inline-calloc -opt-malloc-options=3
429.mcf: -fast -prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmarheap
483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T860 E1
(Intel Xeon E5420, 2.50 GHz)

SPECint_rate2006 = 63.0

SPECint_rate_base2006 = 53.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: May-2008
Hardware Availability: Apr-2008
Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:49:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 June 2008.