



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

**SPECint®\_rate2006 = 84.5**

CELSIUS V840, AMD Opteron 2346 HE (1.8 GHz)

**SPECint\_rate\_base2006 = 72.5**

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jun-2008

Hardware Availability: May-2008

Software Availability: May-2008

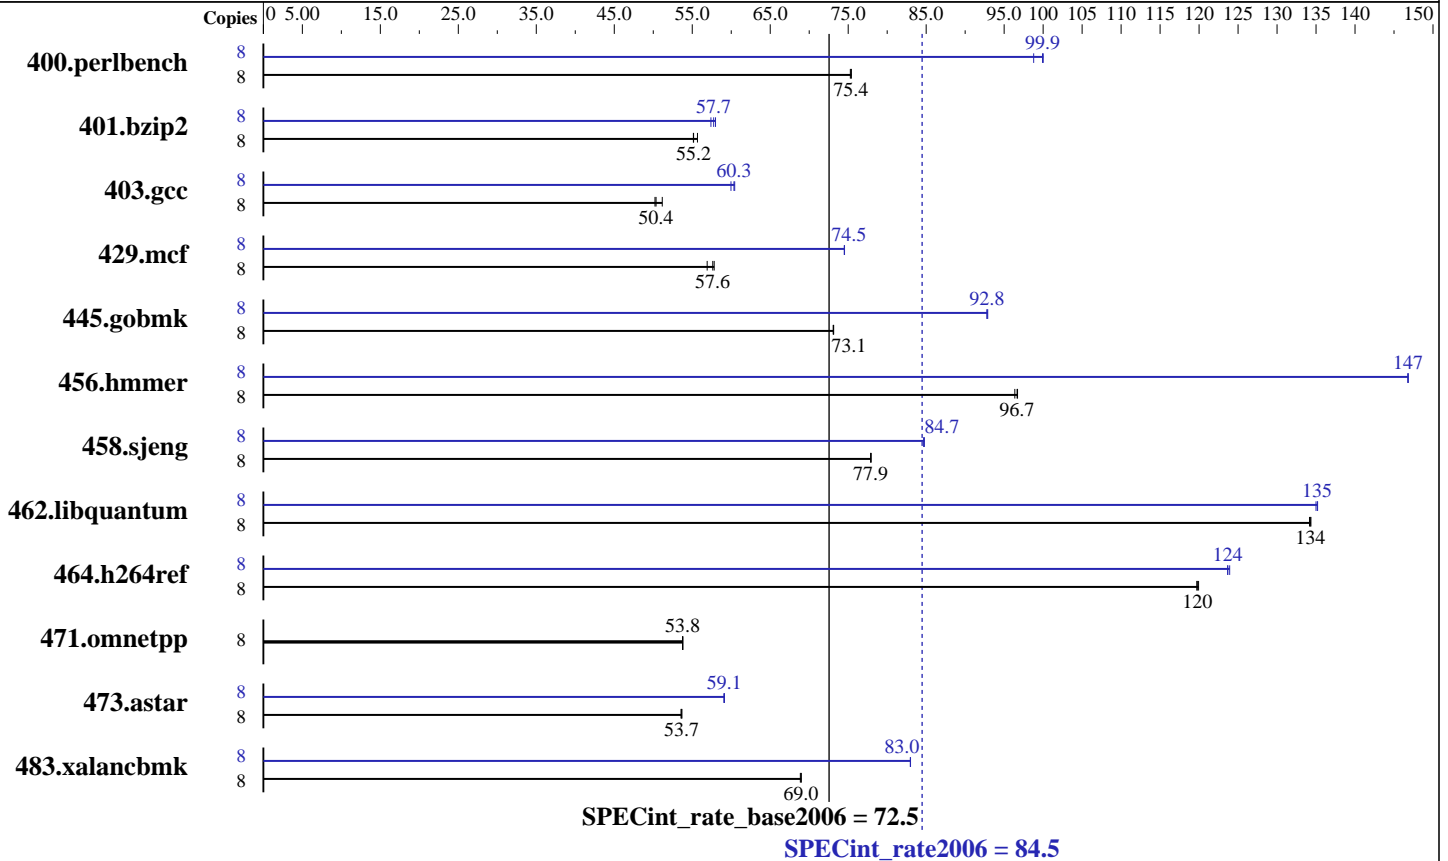

### Hardware

CPU Name: AMD Opteron 2346 HE  
 CPU Characteristics:  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (8x2GB PC2-5300P, CL5, dual rank ECC)  
 Disk Subsystem: 1 x 400 GB SATA II, 7200 rpm  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Workstation Complete Version 7.2-1 PathScale Compiler Suite, Release 3.2 Beta  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User SuSE Run Level 3  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18.50  
 Microquill SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECint\_rate2006 = 84.5

CELSIUS V840, AMD Opteron 2346 HE (1.8 GHz)

SPECint\_rate\_base2006 = 72.5

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1037	75.4	1038	75.3	<b>1037</b>	<b>75.4</b>	8	791	98.8	781	100	<b>782</b>	<b>99.9</b>
401.bzip2	8	1387	55.7	1400	55.1	<b>1399</b>	<b>55.2</b>	8	1345	57.4	1331	58.0	<b>1337</b>	<b>57.7</b>
403.gcc	8	1282	50.2	<b>1279</b>	<b>50.4</b>	1259	51.2	8	<b>1067</b>	<b>60.3</b>	1074	60.0	1065	60.4
429.mcf	8	1282	56.9	1262	57.8	<b>1266</b>	<b>57.6</b>	8	979	74.5	<b>979</b>	<b>74.5</b>	979	74.5
445.gobmk	8	<b>1148</b>	<b>73.1</b>	1147	73.1	1148	73.1	8	<b>904</b>	<b>92.8</b>	903	92.9	904	92.8
456.hammer	8	<b>772</b>	<b>96.7</b>	772	96.7	775	96.4	8	508	147	509	147	<b>508</b>	<b>147</b>
458.sjeng	8	1243	77.9	<b>1243</b>	<b>77.9</b>	1242	77.9	8	1143	84.7	<b>1142</b>	<b>84.7</b>	1142	84.8
462.libquantum	8	1236	134	<b>1235</b>	<b>134</b>	1234	134	8	<b>1226</b>	<b>135</b>	1226	135	1228	135
464.h264ref	8	1479	120	1476	120	<b>1478</b>	<b>120</b>	8	1429	124	1432	124	<b>1431</b>	<b>124</b>
471.omnetpp	8	929	53.8	930	53.7	<b>930</b>	<b>53.8</b>	8	929	53.8	930	53.7	<b>930</b>	<b>53.8</b>
473.astar	8	1049	53.6	1047	53.7	<b>1047</b>	<b>53.7</b>	8	<b>950</b>	<b>59.1</b>	950	59.1	951	59.1
483.xalancbmk	8	800	69.0	<b>800</b>	<b>69.0</b>	802	68.9	8	665	83.0	665	83.0	<b>665</b>	<b>83.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```

powersave -f is applied to set CPU to maximum frequency prior to run
stacksize is set to unlimited prior to run
ulimit -l 2457600
PGI_HUGE_PAGES set to 150
(Total number of huge pages available is 1200)

```

## General Notes

The command numactl has been used to bind processes to CPUs

For information about Fujitsu Siemens Computers please see:  
<http://www.fujitsu-siemens.com>

## Base Compiler Invocation

C benchmarks:  
pgcc

C++ benchmarks:  
pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECint\_rate2006 = 84.5**

**CELSIUS V840, AMD Opteron 2346 HE (1.8 GHz)**

**SPECint\_rate\_base2006 = 72.5**

**CPU2006 license:** 22

**Test date:** Jun-2008

**Test sponsor:** Fujitsu Siemens Computers

**Hardware Availability:** May-2008

**Tested by:** Fujitsu Siemens Computers

**Software Availability:** May-2008

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-fastsse -Msmartalloc=huge:150 -Mfprelaxed -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

-fastsse -Msmartalloc=huge:150 -Mfprelaxed --zc_eh -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona -Bstatic_pgi

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

464.h264ref: pathcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint\_rate2006 = 84.5

CELSIUS V840, AMD Opteron 2346 HE (1.8 GHz)

SPECint\_rate\_base2006 = 72.5

CPU2006 license: 22

Test date: Jun-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2008

Tested by: Fujitsu Siemens Computers

Software Availability: May-2008

## Peak Portability Flags (Continued)

445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -WOPT:if\_conv=0 -CG:local\_sched\_alg=1

401.bzip2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2) -fastsse -O4  
 -Msmartalloc=huge:150 -Mprefetch=t0 -Mnounroll  
 -tp barcelona-64 -Bstatic\_pgi

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:Ofast -m32

429.mcf: -fastsse -Msmartalloc=huge:150 -Mipa=jobs:4 -Mipa=fast  
 -Mipa=inline:1 -tp barcelona -Bstatic\_pgi

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
 -LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge:150  
 -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=jobs:4  
 -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
 -tp barcelona-64 -Bstatic\_pgi

458.sjeng: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)  
 -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)  
 -Mipa=noarg(pass 2) -fastsse -Msmartalloc=huge:150  
 -Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

462.libquantum: -fastsse -Munroll=m:8 -Msmartalloc=huge:150  
 -Mprefetch=distance:4 -Mfprelaxed -Mipa=jobs:4 -Mipa=fast  
 -Mipa=inline -Mipa=noarg -tp barcelona-64 -Bstatic\_pgi

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECint\_rate2006 = 84.5**

**CELSIUS V840, AMD Opteron 2346 HE (1.8 GHz)**

**SPECint\_rate\_base2006 = 72.5**

**CPU2006 license:** 22

**Test date:** Jun-2008

**Test sponsor:** Fujitsu Siemens Computers

**Hardware Availability:** May-2008

**Tested by:** Fujitsu Siemens Computers

**Software Availability:** May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=jobs:4(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline:6(pass 2) -fastsse -O4  
-Msmartalloc=huge:150 -Msafeptr=global -Mfprelaxed --zc\_eh  
-tp barcelona -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0 -m32  
-lsmartheap

## Peak Other Flags

C++ benchmarks:

483.xalancbmk: -L/opt/SmartHeap\_8.1/lib

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/fsc-mix-pgi-path.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/fsc-mix-pgi-path.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 19:56:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 July 2008.