



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Rj-2  
(Intel Xeon E5440)

SPECint®\_rate2006 = 67.5

SPECint\_rate\_base2006 = 57.1

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

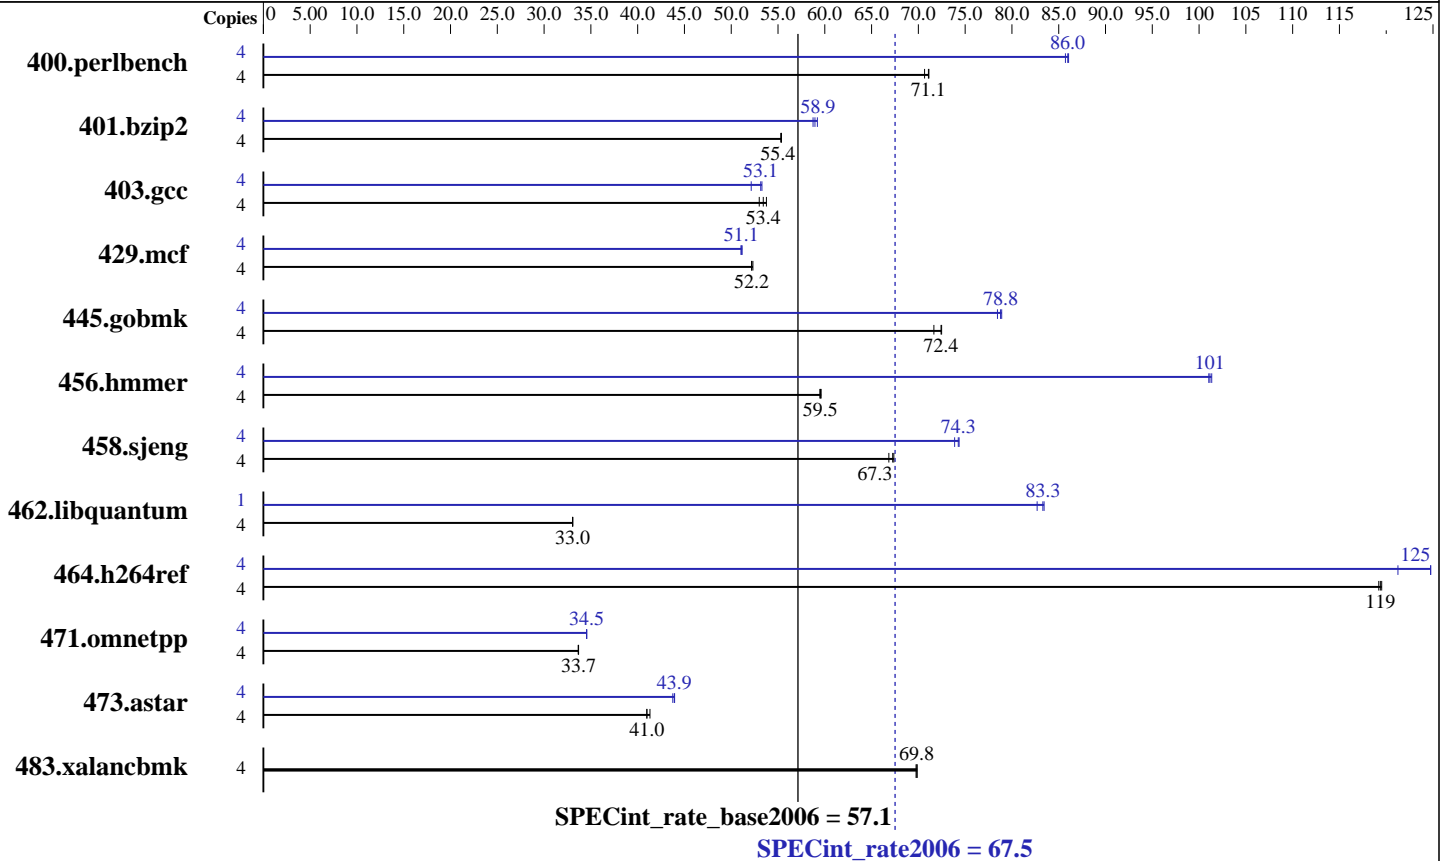

### Hardware

CPU Name: Intel Xeon E5440  
 CPU Characteristics: 2.83 GHz, 2x6 MB L2 shared, 1333 MHz bus  
 CPU MHz: 2833  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
 Disk Subsystem: 1x73.2 GB SAS, 15000RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap library 8.1 binutils 2.17



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Rj-2  
(Intel Xeon E5440)

SPECint\_rate2006 = 67.5

SPECint\_rate\_base2006 = 57.1

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2008

Hardware Availability: Apr-2008

Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>550</b>	<b>71.1</b>	549	71.1	553	70.7	4	454	86.1	<b>455</b>	<b>86.0</b>	456	85.7
401.bzip2	4	698	55.3	697	55.4	<b>697</b>	<b>55.4</b>	4	<b>655</b>	<b>58.9</b>	657	58.7	652	59.2
403.gcc	4	599	53.8	<b>603</b>	<b>53.4</b>	608	53.0	4	604	53.3	618	52.1	<b>606</b>	<b>53.1</b>
429.mcf	4	699	52.2	697	52.3	<b>699</b>	<b>52.2</b>	4	713	51.2	<b>714</b>	<b>51.1</b>	715	51.0
445.gobmk	4	<b>579</b>	<b>72.4</b>	579	72.5	586	71.7	4	<b>533</b>	<b>78.8</b>	532	78.9	535	78.5
456.hmmer	4	628	59.5	<b>627</b>	<b>59.5</b>	626	59.6	4	<b>369</b>	<b>101</b>	368	101	369	101
458.sjeng	4	724	66.8	<b>720</b>	<b>67.3</b>	718	67.4	4	655	73.9	<b>652</b>	<b>74.3</b>	651	74.4
462.libquantum	4	2508	33.0	<b>2508</b>	<b>33.0</b>	2506	33.1	1	251	82.7	248	83.4	<b>249</b>	<b>83.3</b>
464.h264ref	4	741	120	743	119	<b>742</b>	<b>119</b>	4	<b>710</b>	<b>125</b>	710	125	730	121
471.omnetpp	4	742	33.7	<b>742</b>	<b>33.7</b>	743	33.6	4	<b>724</b>	<b>34.5</b>	723	34.6	724	34.5
473.astar	4	680	41.3	685	41.0	<b>685</b>	<b>41.0</b>	4	642	43.8	639	43.9	<b>639</b>	<b>43.9</b>
483.xalancbmk	4	<b>395</b>	<b>69.8</b>	396	69.8	395	69.9	4	<b>395</b>	<b>69.8</b>	396	69.8	395	69.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores

## Platform Notes

Bios settings:  
Hardware Prefetcher: Enabled  
Adjacent Cache Line Prefetch: Disabled  
Intel SpeedStep Technology: Disabled

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2,  
456.hmmer, for peak, are compiled in 64-bit mode

The NEC Express5800/120Rh-1(Intel Xeon E5440),  
the NEC Express5800/120Rj-2(Intel Xeon E5440),  
the Bull NovaScale R440 E1 (Intel Xeon E5440,2.83GHz) and  
the Bull NovaScale R460 E1 (Intel Xeon E5440,2.83GHz) models are electronically equivalent.  
The results have been measured on a NEC Express5800/120Rj-2(Intel Xeon E5440) model.

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint\_rate2006 = 67.5**

Express5800/120Rj-2  
(Intel Xeon E5440)

**SPECint\_rate\_base2006 = 57.1**

**CPU2006 license:** 9006

**Test date:** Jun-2008

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2008

**Tested by:** NEC Corporation

**Software Availability:** Nov-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Rj-2  
(Intel Xeon E5440)

**SPECint\_rate2006 = 67.5**

**SPECint\_rate\_base2006 = 57.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jun-2008

**Hardware Availability:** Apr-2008

**Software Availability:** Nov-2007

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch  
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
403.gcc: -fast -inline-calloc -opt-malloc-options=3  
429.mcf: -fast -prefetch  
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias  
456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive  
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control  
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmarheap  
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/opt/SmartHeap\_8.1/lib -lsmarheap  
483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/120Rj-2  
(Intel Xeon E5440)

**SPECint\_rate2006 = 67.5**

**SPECint\_rate\_base2006 = 57.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jun-2008

**Hardware Availability:** Apr-2008

**Software Availability:** Nov-2007

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-Intel-ic10.1-INT-ia32-linux-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 19:58:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 July 2008.