



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 429

Bull Escala PL1660 (4.2 GHz, 16 cores)

SPECint_rate_base2006 = 370

CPU2006 license: 20


Test date: Jun-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Oct-2007

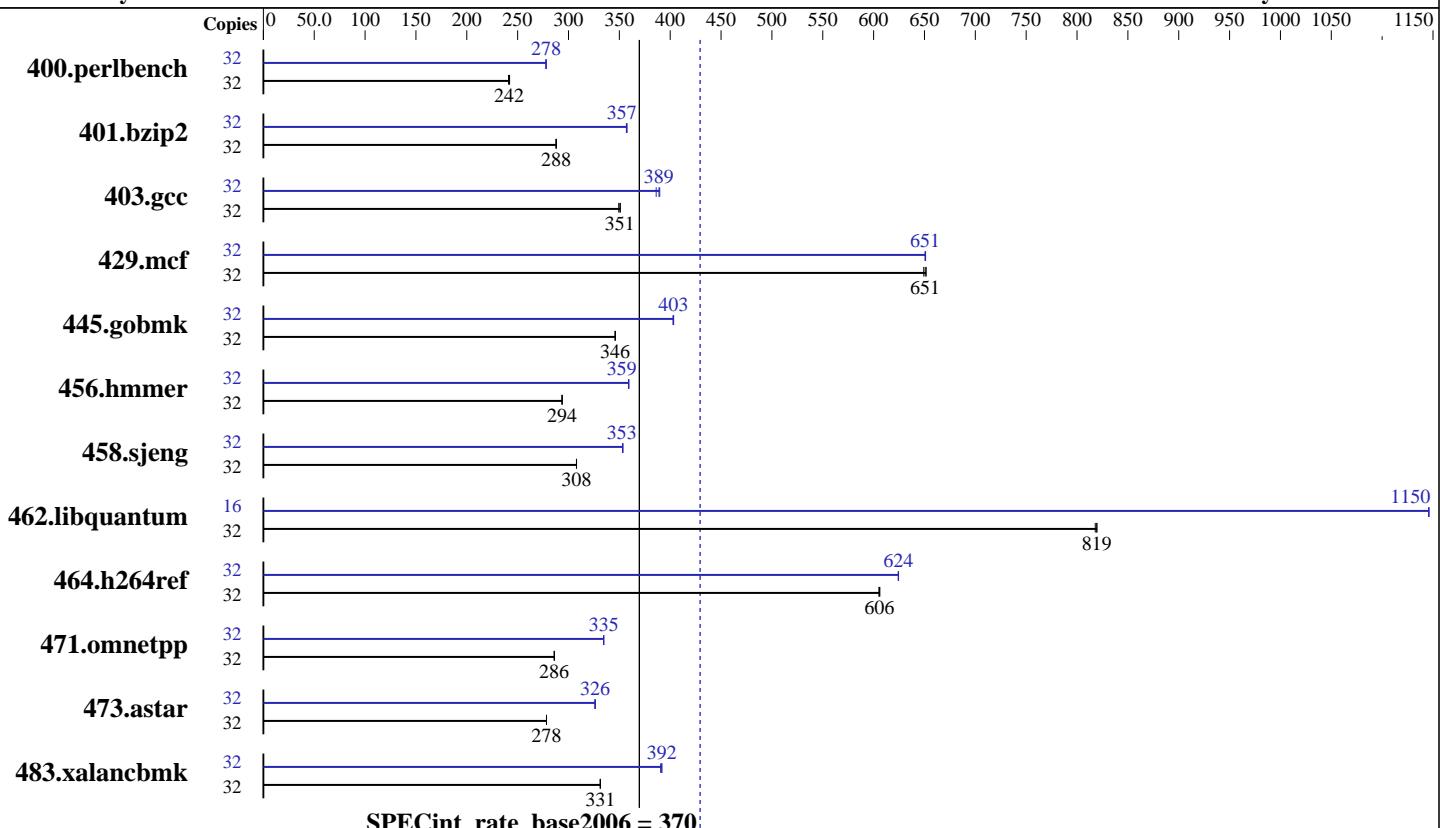

Hardware

CPU Name: POWER6
CPU Characteristics:
CPU MHz: 4200
FPU: Integrated
CPU(s) enabled: 16 cores, 8 chips, 2 cores/chip, 2 threads/core
CPU(s) orderable: 4,8,12,16 cores (1 to 4 drawers with 2 chips)
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per core
L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 128 GB (64x2 GB) DDR2 667 MHz
Disk Subsystem: 2x73 GB SAS 15K RPM
Other Hardware: None

Software

Operating System: IBM AIX 5L V5.3 updated with the 5300-07 Technology Level
Compiler: XL C/C++ Enterprise Edition V9 for AIX Updated with the Oct2007 PTF.
Auto Parallel: No
File System: AIX/JFS2
System State: Multi-user
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 429

Bull Escala PL1660 (4.2 GHz, 16 cores)

SPECint_rate_base2006 = 370

CPU2006 license: 20

Test date: Jun-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Oct-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	1291	242	1297	241	1293	242	32	1125	278	1124	278	1125	278
401.bzip2	32	1073	288	1073	288	1072	288	32	864	358	865	357	865	357
403.gcc	32	734	351	735	351	737	349	32	661	390	662	389	667	386
429.mcf	32	449	649	448	652	448	651	32	449	651	448	651	448	651
445.gobmk	32	970	346	970	346	970	346	32	832	403	832	403	834	403
456.hammer	32	1016	294	1016	294	1017	294	32	831	359	831	359	831	359
458.sjeng	32	1258	308	1258	308	1258	308	32	1095	354	1096	353	1096	353
462.libquantum	32	809	820	811	818	809	819	16	289	1150	289	1150	289	1150
464.h264ref	32	1168	606	1170	605	1169	606	32	1134	624	1135	624	1134	625
471.omnetpp	32	699	286	699	286	699	286	32	598	335	598	335	598	335
473.astar	32	807	278	807	278	807	278	32	689	326	688	326	689	326
483.xalancbmk	32	666	331	667	331	666	331	32	564	392	564	392	565	391

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

See flags file of details on following settings.
all ulimits set to unlimited.

Environment variables set before executing benchmarks:

```
MALLOCOPTIONS=pool
MEMORY_AFFINITY=MCM
XLFRTEOPTS=intinthds=1
```

System set to "Enhanced" mode when defining partition on HMC.
bindprocessor command used on submit to bind each copy to a unique processor.

Remote console disabled in /etc/inittab.

fdpr binary optimization tool used for:

```
400.perlbench 401.bzip2 403.gcc 429.mcf 456.hammer
458.sjeng 462.libquantum 464.h264ref 473.astar
4000 16M large pages defined with vmo command
```

Base Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlc
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 429

Bull Escala PL1660 (4.2 GHz, 16 cores)

SPECint_rate_base2006 = 370

CPU2006 license: 20

Test date: Jun-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Oct-2007

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_AIX  
462.libquantum: -DSPEC_CPU_AIX  
    464.h264ref: -DSPEC_CPU_AIX -qchars=signed  
483.xalancbmk: -DSPEC_CPU_AIX
```

Base Optimization Flags

C benchmarks:

```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qalias=noansi  
-qalloc -blpdata
```

C++ benchmarks:

```
-bmaxdata:0x20000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all  
-blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qipa=threads -qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlc
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_AIX  
403.gcc: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_AIX  
    464.h264ref: -DSPEC_CPU_AIX -qchars=signed  
483.xalancbmk: -DSPEC_CPU_AIX
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 429

Bull Escala PL1660 (4.2 GHz, 16 cores)

SPECint_rate_base2006 = 370

CPU2006 license: 20

Test date: Jun-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Oct-2007

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O4  
-qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS  
-qalias=noansi -qfdpr -blpdata  
  
401.bzip2: -bmaxdata:0x4fffffff -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS -qfdpr  
-blpdata  
  
403.gcc: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage  
-D_ILS_MACROS -qalloca -qfdpr -q64 -blpdata  
  
429.mcf: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx  
-qvecnvol -D_ILS_MACROS -qfdpr -blpdata  
  
445.gobmk: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage -qenablevmx  
-qvecnvol -D_ILS_MACROS -blpdata  
  
456.hmmr: -O5 -qlargepage -D_ILS_MACROS -qfdpr -blpdata  
  
458.sjeng: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx  
-qvecnvol -D_ILS_MACROS -qfdpr -blpdata  
  
462.libquantum: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx  
-qvecnvol -D_ILS_MACROS -q64 -qfdpr -blpdata  
  
464.h264ref: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -q64 -D_ILS_MACROS  
-qenablevmx -qvecnvol -qfdpr -bdatapsize:64K  
-bstackpsize:64K -btextpsize:64K
```

C++ benchmarks:

```
471.omnetpp: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -qenablevmx -qvecnvol -D_ILS_MACROS  
-qalign=natural -qrtti=all -qinlglue -blpdata  
  
473.astar: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -D_ILS_MACROS -qfdpr -qinlglue  
-qalign=natural -blpdata  
  
483.xalancbmk: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -D_ILS_MACROS -qinlglue -D_IBM_FAST_VECTOR  
-blpdata
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 429

Bull Escala PL1660 (4.2 GHz, 16 cores)

SPECint_rate_base2006 = 370

CPU2006 license: 20

Test date: Jun-2008

Test sponsor: Bull SAS

Hardware Availability: Mar-2008

Tested by: Bull SAS

Software Availability: Oct-2007

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-AIX-XL.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/IBM-AIX-XL.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 20:03:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 July 2008.