



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint®_rate2006 = 135

Sun SPARC Enterprise M4000

SPECint_rate_base2006 = 118

CPU2006 license: 6


Test date: Jul-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

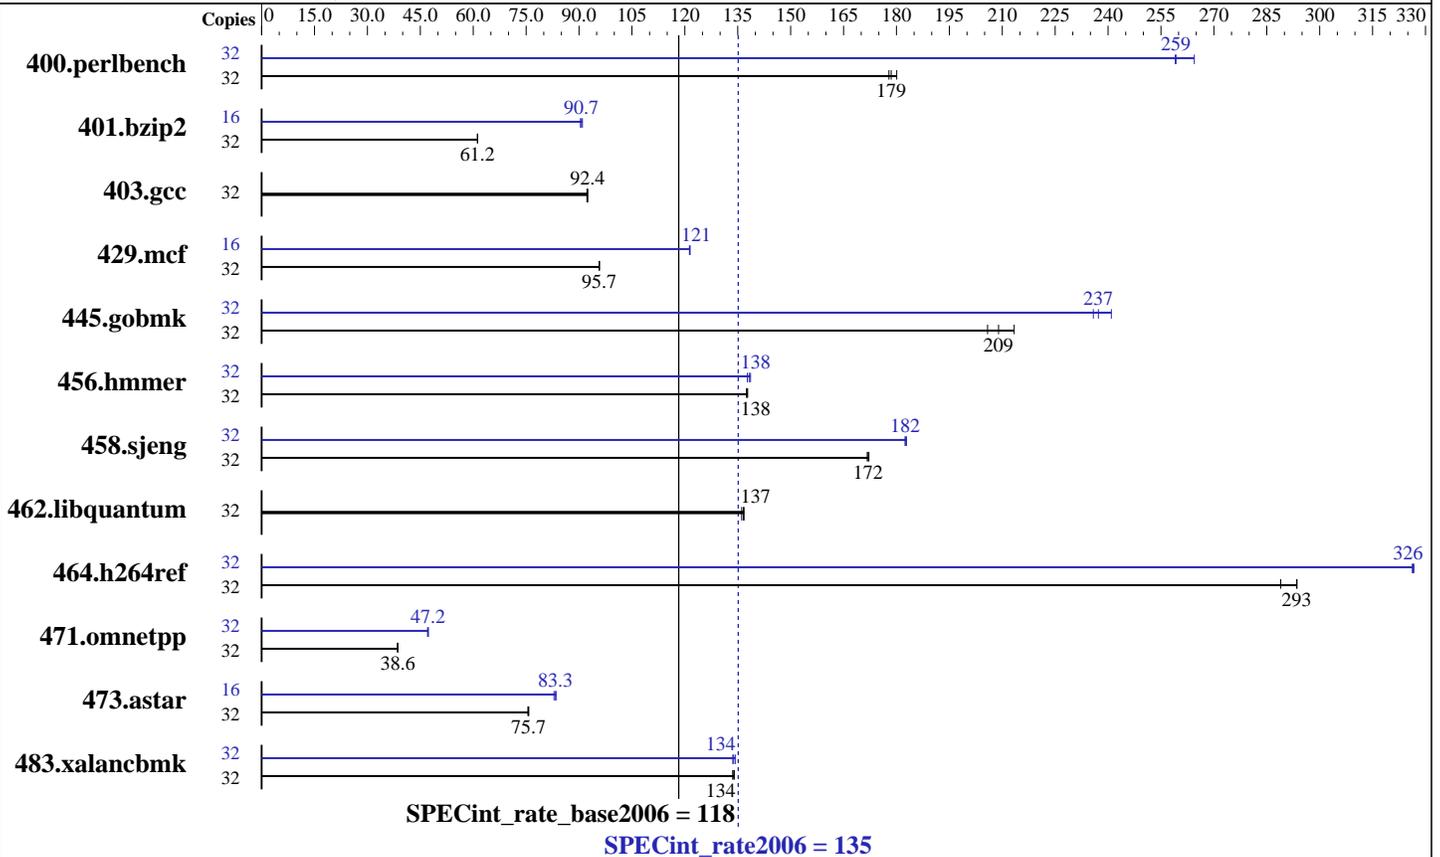

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 2 CMU; each CMU contains 2 CPU chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 5 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 64 GB (32 x 2 GB)
 Disk Subsystem: 591 GB RAID 5 Sun StorageTek 2540
 10 x 73 GB 15K RPM Seagate SAS disks
 Other Hardware: None

Software

Operating System: Solaris 10 5/08 with patch 137111-03
 Compiler: Sun Studio 12 with patches 124867-06, 124861-07, 124863-05 (see patch information below)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 135

Sun SPARC Enterprise M4000

SPECint_rate_base2006 = 118

CPU2006 license: 6

Test date: Jul-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 32 | <u>1751</u> | <u>179</u> | 1736 | 180 | 1758 | 178 | 32 | 1182 | 264 | 1207 | 259 | <u>1206</u> | <u>259</u> |
| 401.bzip2 | 32 | <u>5045</u> | <u>61.2</u> | 5047 | 61.2 | 5041 | 61.3 | 16 | <u>1702</u> | <u>90.7</u> | 1708 | 90.4 | 1697 | 91.0 |
| 403.gcc | 32 | 2792 | 92.3 | <u>2787</u> | <u>92.4</u> | 2787 | 92.4 | 32 | 2792 | 92.3 | <u>2787</u> | <u>92.4</u> | 2787 | 92.4 |
| 429.mcf | 32 | 3046 | 95.8 | 3049 | 95.7 | <u>3049</u> | <u>95.7</u> | 16 | <u>1202</u> | <u>121</u> | 1203 | 121 | 1201 | 121 |
| 445.gobmk | 32 | 1573 | 213 | 1631 | 206 | <u>1607</u> | <u>209</u> | 32 | 1393 | 241 | 1423 | 236 | <u>1415</u> | <u>237</u> |
| 456.hammer | 32 | <u>2169</u> | <u>138</u> | 2171 | 137 | 2166 | 138 | 32 | 2168 | 138 | <u>2160</u> | <u>138</u> | 2154 | 139 |
| 458.sjeng | 32 | <u>2252</u> | <u>172</u> | 2255 | 172 | 2249 | 172 | 32 | 2118 | 183 | <u>2122</u> | <u>182</u> | 2122 | 182 |
| 462.libquantum | 32 | <u>4853</u> | <u>137</u> | 4847 | 137 | 4871 | 136 | 32 | <u>4853</u> | <u>137</u> | 4847 | 137 | 4871 | 136 |
| 464.h264ref | 32 | <u>2413</u> | <u>293</u> | 2412 | 294 | 2451 | 289 | 32 | 2168 | 327 | <u>2169</u> | <u>326</u> | 2171 | 326 |
| 471.omnetpp | 32 | <u>5181</u> | <u>38.6</u> | 5187 | 38.6 | 5181 | 38.6 | 32 | 4233 | 47.3 | 4251 | 47.1 | <u>4235</u> | <u>47.2</u> |
| 473.astar | 32 | 2966 | 75.7 | 2975 | 75.5 | <u>2968</u> | <u>75.7</u> | 16 | 1346 | 83.5 | 1355 | 82.9 | <u>1348</u> | <u>83.3</u> |
| 483.xalancbmk | 32 | <u>1652</u> | <u>134</u> | 1652 | 134 | 1647 | 134 | 32 | <u>1650</u> | <u>134</u> | 1644 | 134 | 1653 | 134 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

Operating System Notes

Environment Variable Settings:

ulimit -s 131072 was used to limit the space consumed by the stack (making more space available for the heap)

System Tunables (/etc/system parameters):

tune_t_fsflushr=10

Controls how many seconds elapse between runs of the page flush daemon, fsflush.

autoup=600

Causes pages older than the listed number of seconds to

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 135

Sun SPARC Enterprise M4000

SPECint_rate_base2006 = 118

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

Operating System Notes (Continued)

```

be written by fsflush.
bufhwm=3000
Memory byte limit for caching I/O buffers
segmap_percent=1
Set maximum percent memory for file system cache

```

Other System Settings:

```

The webconsole service was turned off using
svcadm disable webconsole

```

Platform Notes

```

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

```

```

This result is measured on a Sun SPARC Enterprise M4000 Server.
Note that the Sun SPARC Enterprise M4000 and Fujitsu SPARC Enterprise
M4000 are electrically equivalent.

```

Base Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

```

Base Optimization Flags

C benchmarks:

```

-fast -fma=fused -xipo=2 -xpagesize=4M -xarch=sparcfmaf
-xprefetch_level=1 -xalias_level=std -l12amm

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 135

Sun SPARC Enterprise M4000

SPECint_rate_base2006 = 118

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M
-xarch=sparcfmaf -xprefetch_level=2 -xalias_level=compatible -lfast

Base Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=std -xipo=2 -xrestrict -fma=fused -lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=strong -fma=fused

403.gcc: basepeak = yes

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 135

Sun SPARC Enterprise M4000

SPECint_rate_base2006 = 118

CPU2006 license: 6

Test date: Jul-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Sun Microsystems

Software Availability: Jul-2008

Peak Optimization Flags (Continued)

429.mcf: -fast -xpagesize=4M -xipo=2 -xprefetch=no -xrestrict
-xalias_level=std -lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=std -xrestrict -fma=fused -xarch=sparcfmaf
-ll2amm

456.hmmer: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -fma=fused

458.sjeng: Same as 456.hmmer

462.libquantum: basepeak = yes

464.h264ref: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xipo=2 -xalias_level=std -xarch=sparcfmaf -xprefetch=no
-ll2amm

C++ benchmarks:

471.omnetpp: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-Qoption cg -Qlp-av=0 -fma=fused -lfast

473.astar: -xdepend -library=stlport4 -fast -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch_level=2
-fma=fused -lfast

483.xalancbmk: -xdepend -library=stlport4
-xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xalias_level=compatible -xipo=2 -xprefetch=no -fma=fused
-lfast

Peak Other Flags

C benchmarks:

-xjobs=16 -V -#

C++ benchmarks:

-xjobs=16 -verbose=diags,version



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint_rate2006 = 135

Sun SPARC Enterprise M4000

SPECint_rate_base2006 = 118

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 18:52:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.