



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp[®]_rate2006 = 1110

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1060

CPU2006 license: 6


Test date: Jul-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Fujitsu Limited

Software Availability: Jul-2008

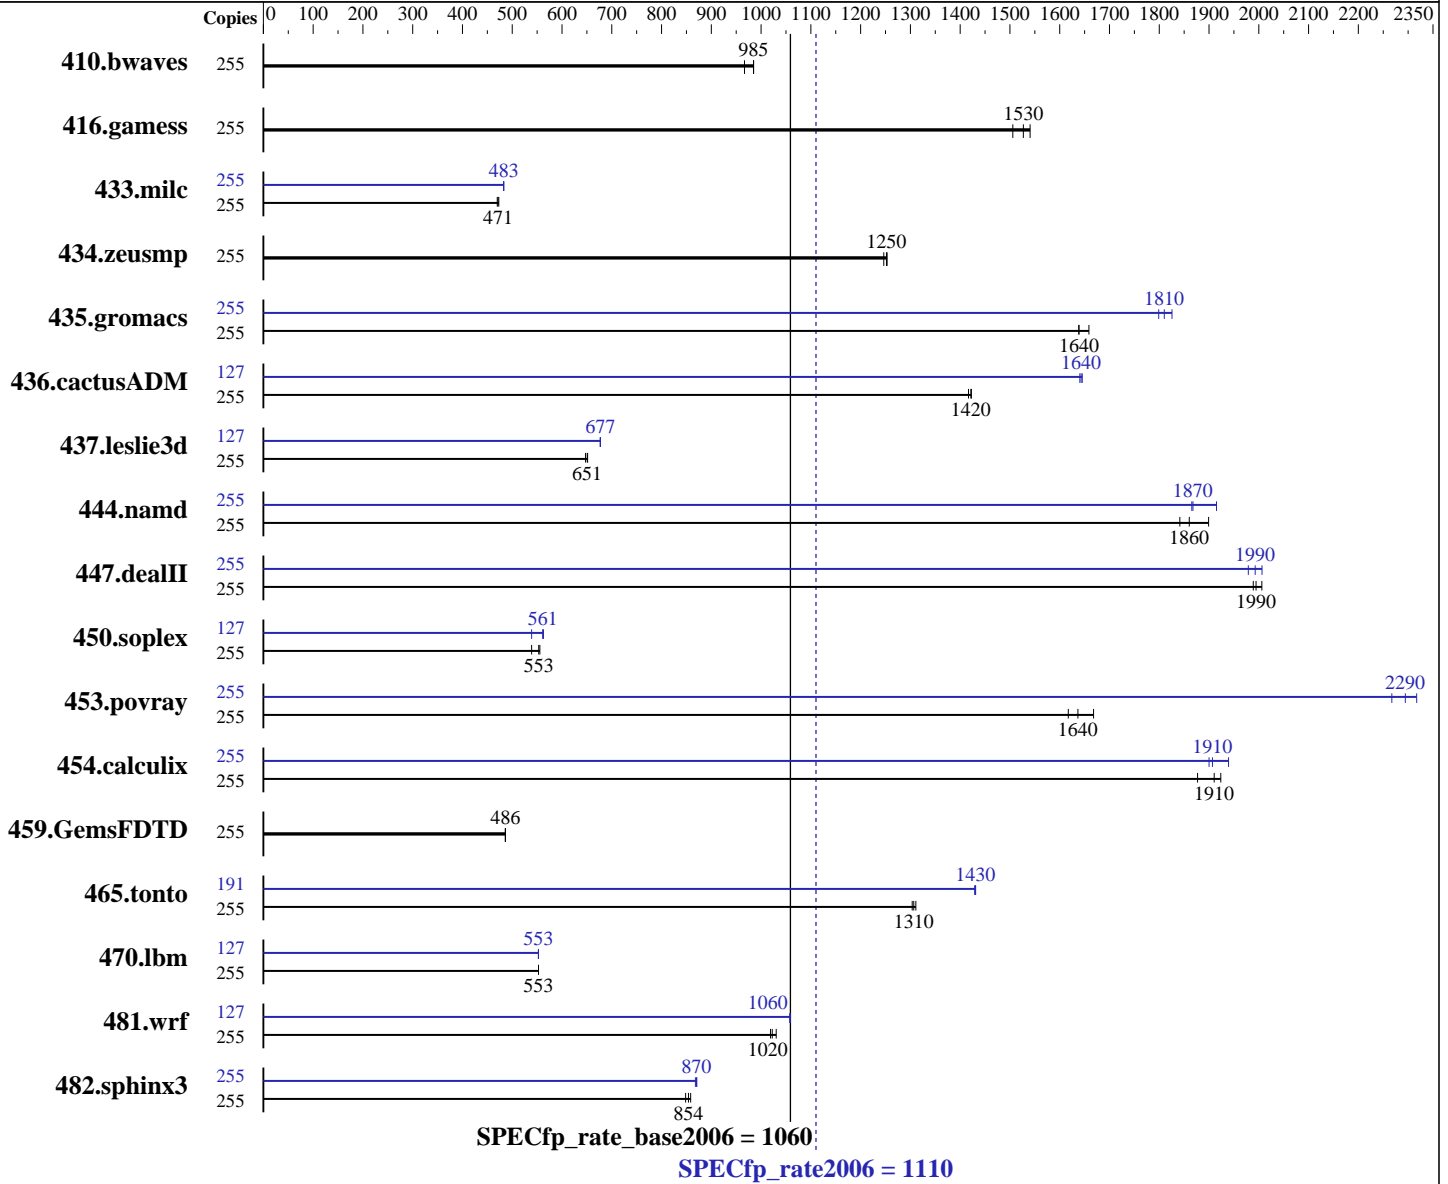

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics:
 CPU MHz: 2520
 FPU: Integrated
 CPU(s) enabled: 128 cores, 32 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 to 16 CMUs; each CMU contains 2 or 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

Software

Operating System: Solaris 10 5/08 with Patch 137111-03
 Compiler: Sun Studio 12 with patches
 124867-06, 124861-07, 124863-05, 127000-05
 (see patch information below)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 1110

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1060

CPU2006 license: 6

Test date: Jul-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Fujitsu Limited

Software Availability: Jul-2008

L3 Cache: None
 Other Cache: None
 Memory: 512 GB (256 x 2 GB)
 Disk Subsystem: OS disk: 1 x 72 GB 10000 RPM disk Seagate Savvio
 EX.disk: 864 GB RAID 0 Solaris Volume
 12 x 72 GB 10000 RPM disk
 Stripe interlace size 786 blocks
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	255	3585	967	<u>3519</u>	<u>985</u>	3518	985	255	3585	967	<u>3519</u>	<u>985</u>	3518	985
416.gamess	255	3241	1540	<u>3270</u>	<u>1530</u>	3316	1510	255	3241	1540	<u>3270</u>	<u>1530</u>	3316	1510
433.milc	255	<u>4966</u>	<u>471</u>	4982	470	4949	473	255	<u>4849</u>	<u>483</u>	4848	483	4849	483
434.zeusmp	255	1852	1250	<u>1854</u>	<u>1250</u>	1862	1250	255	1852	1250	<u>1854</u>	<u>1250</u>	1862	1250
435.gromacs	255	1098	1660	1111	1640	<u>1111</u>	<u>1640</u>	255	1012	1800	997	1830	<u>1006</u>	<u>1810</u>
436.cactusADM	255	2142	1420	2151	1420	<u>2144</u>	<u>1420</u>	127	925	1640	<u>924</u>	<u>1640</u>	922	1650
437.leslie3d	255	3679	651	3703	647	<u>3684</u>	<u>651</u>	127	1763	677	1763	677	<u>1763</u>	<u>677</u>
444.namd	255	1111	1840	<u>1099</u>	<u>1860</u>	1077	1900	255	1096	1870	<u>1095</u>	<u>1870</u>	1068	1920
447.dealII	255	<u>1463</u>	<u>1990</u>	1467	1990	1454	2010	255	<u>1464</u>	<u>1990</u>	1474	1980	1454	2010
450.soplex	255	3946	539	<u>3844</u>	<u>553</u>	3829	555	127	1965	539	1882	563	<u>1888</u>	<u>561</u>
453.povray	255	839	1620	813	1670	<u>829</u>	<u>1640</u>	255	<u>591</u>	<u>2290</u>	598	2270	585	2320
454.calculix	255	<u>1101</u>	<u>1910</u>	1121	1880	1094	1920	255	1107	1900	<u>1103</u>	<u>1910</u>	1085	1940
459.GemsFDTD	255	5564	486	5563	486	<u>5564</u>	<u>486</u>	255	5564	486	5563	486	<u>5564</u>	<u>486</u>
465.tonto	255	1914	1310	<u>1920</u>	<u>1310</u>	1925	1300	191	<u>1314</u>	<u>1430</u>	1315	1430	1313	1430
470.lbm	255	<u>6339</u>	<u>553</u>	6338	553	6339	553	127	3157	553	3157	553	<u>3157</u>	<u>553</u>
481.wrf	255	2795	1020	<u>2786</u>	<u>1020</u>	2764	1030	127	1341	1060	<u>1341</u>	<u>1060</u>	1340	1060
482.sphinx3	255	<u>5819</u>	<u>854</u>	5789	858	5858	848	255	<u>5711</u>	<u>870</u>	5726	868	5707	871

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 1110

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1060

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

Operating System Notes

Environment Variable Settings:

```
export LD_PRELOAD=mpss.so.1:madv.so.1
export MPSSHEAP=4MB
export MPSSSTACK=4MB
  Requests system to use 4 MB pages when possible.
export MADV access_lwp
  access_lwp requests that the next light weight process to touch
  the specified address range will access it most heavily.
ulimit -s 131072 was used to limit the space consumed
  by the stack (making more space available for the heap)
```

System Tunables (/etc/system parameters):

```
tune_t_fsflushr=4
  Controls how many seconds elapse between runs of the
  page flush daemon, fsflush.
autoup=1920
  Causes pages older than the listed number of seconds to
  be written by fsflush.
lpg_alloc_prefer=1
  Set lgroup page allocation to strongly prefer local pages.
```

Other System Settings:

The webconsole service was turned off using
svcadm disable webconsole

Platform Notes

Memory is 8-way interleaved by filling all slots with
the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M9000 Server.
Note that the Sun SPARC Enterprise M9000 and Fujitsu SPARC Enterprise
M9000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 1110

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1060

CPU2006 license: 6

Test date: Jul-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Fujitsu Limited

Software Availability: Jul-2008

Base Optimization Flags

C benchmarks:

-fast -xipo=2 -xpagesize=4M -xprefetch_level=1 -xalias_level=std
-fma=fused -l12amm

C++ benchmarks:

-library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch_level=1
-xalias_level=compatible -fma=fused -l12amm

Fortran benchmarks:

-fast -xipo=2 -xpagesize=4M -xprefetch_level=1 -fma=fused -l12amm

Benchmarks using both Fortran and C:

-fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -xprefetch_level=1
-xalias_level=std -fma=fused -l12amm

Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Peak Optimization Flags

C benchmarks:

433.milc: -fast -xipo=2 -xpagesize=4M -fma=fused
-xalias_level=strong
-xprefetch_auto_type=indirect_array_access -l12amm

470.lbm: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xrestrict -xipo=2
-xprefetch_level=2 -xarch=v8plusb -fma=fused -l12amm

482.sphinx3: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -lfast -l12amm

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 1110

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1060

CPU2006 license: 6

Test date: Jul-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2008

Tested by: Fujitsu Limited

Software Availability: Jul-2008

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -library=stlport4 -fast -xipo=2 -xpagesize=4M -fma=fused
-xdepend -xalias_level=compatible -l12amm

447.deallI: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xdepend -xalias_level=compatible
-xrestrict -l12amm

450.soplex: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xdepend -xalias_level=compatible
-fsimple=0 -xrestrict -xprefetch=no -l12amm

453.povray: -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=4M -fma=fused -xdepend -xalias_level=compatible
-xprefetch=latx:6.0 -l12amm

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch=latx:5.0
-l12amm

459.GemsFDTD: basepeak = yes

465.tonto: -fast -xipo=2 -xpagesize=4M -fma=fused -xprefetch_level=2
-xprefetch=latx:3 -lfast -l12amm

Benchmarks using both Fortran and C:

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -xpagesize=4M -fma=fused -xinline= -fsimple=0
-xprefetch=no -xarch=generic -xchip=generic

436.cactusADM: -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -fma=fused
-l12amm

454.calculix: -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -fma=fused
-xvector -xprefetch_level=3 -xprefetch=latx:8.0
-xalias_level=std -l12amm

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 1110

Sun SPARC Enterprise M9000

SPECfp_rate_base2006 = 1060

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Jul-2008

Hardware Availability: Jul-2008

Software Availability: Jul-2008

Peak Optimization Flags (Continued)

```
481.wrf: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xipo=2 -xpagesize=4M -fma=fused -xprefetch_level=2
-xprefetch=latx:2 -l12amm
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 18:50:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2008.