



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECint®\_rate2006 = 104

### PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

### SPECint\_rate\_base2006 = 90.6

CPU2006 license: 55


Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

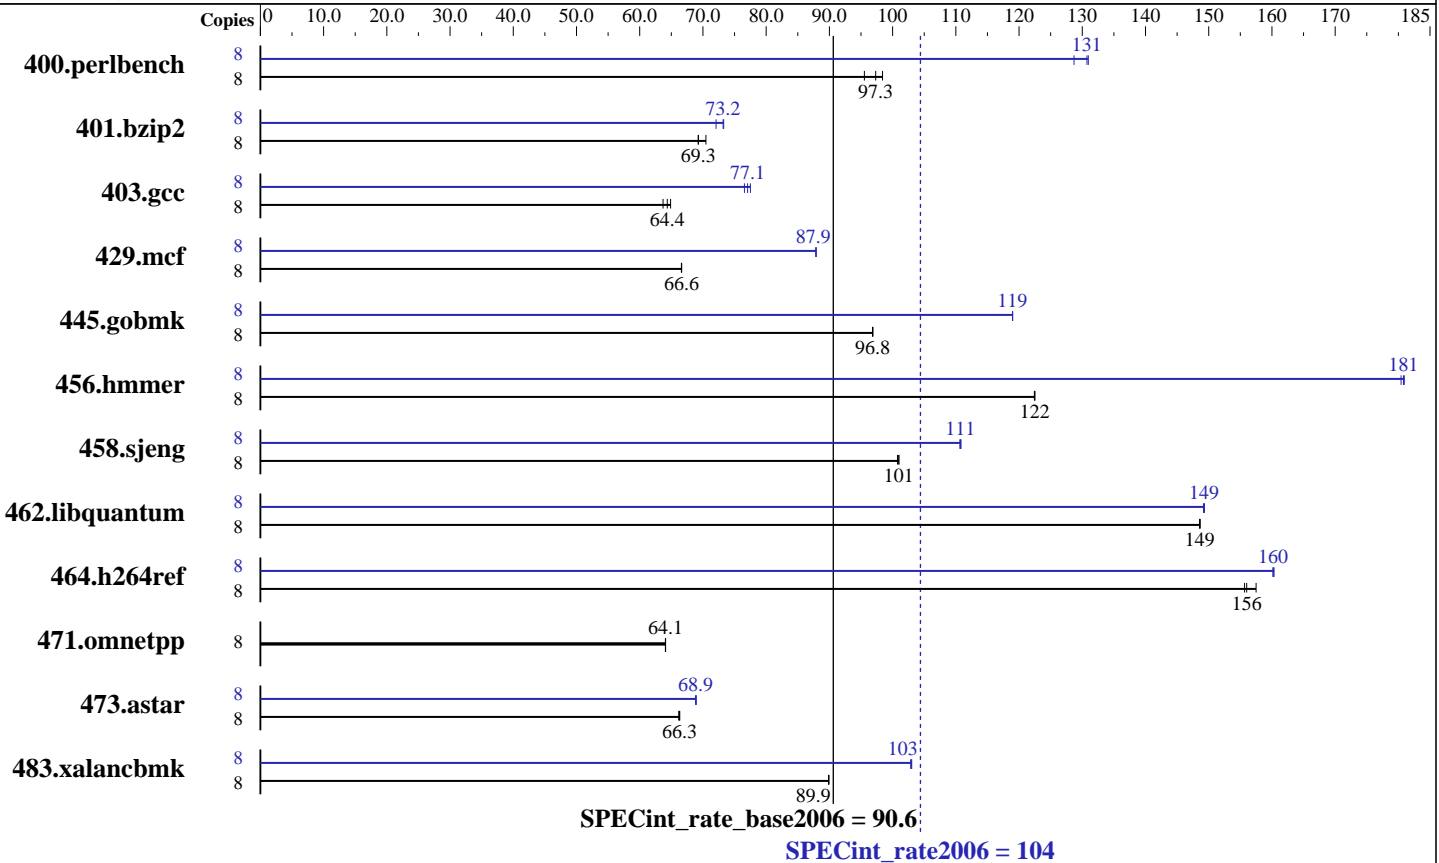

#### Hardware

CPU Name: AMD Opteron 2358 SE  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4 x 4GB, DDR2-667, CL5)  
 Disk Subsystem: 1 x 73GB 2.5" SAS 10000 RPM  
 Other Hardware: None

#### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 104

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECint\_rate\_base2006 = 90.6

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	794	98.4	<b>803</b>	<b>97.3</b>	818	95.5	8	607	129	<b>598</b>	<b>131</b>	597	131
401.bzip2	8	1095	70.5	1115	69.3	<b>1114</b>	<b>69.3</b>	8	1071	72.1	<b>1055</b>	<b>73.2</b>	1053	73.3
403.gcc	8	993	64.9	<b>1001</b>	<b>64.4</b>	1011	63.7	8	831	77.5	841	76.6	<b>836</b>	<b>77.1</b>
429.mcf	8	<b>1095</b>	<b>66.6</b>	1095	66.6	1096	66.6	8	830	87.9	<b>830</b>	<b>87.9</b>	830	87.9
445.gobmk	8	866	96.9	<b>867</b>	<b>96.8</b>	867	96.8	8	705	119	<b>705</b>	<b>119</b>	705	119
456.hmmer	8	610	122	<b>609</b>	<b>122</b>	609	122	8	<b>413</b>	<b>181</b>	414	180	413	181
458.sjeng	8	958	101	961	101	<b>959</b>	<b>101</b>	8	<b>874</b>	<b>111</b>	873	111	875	111
462.libquantum	8	1115	149	<b>1116</b>	<b>149</b>	1116	149	8	1110	149	1111	149	<b>1110</b>	<b>149</b>
464.h264ref	8	<b>1135</b>	<b>156</b>	1124	157	1137	156	8	<b>1105</b>	<b>160</b>	1104	160	1105	160
471.omnetpp	8	<b>780</b>	<b>64.1</b>	781	64.1	780	64.1	8	<b>780</b>	<b>64.1</b>	781	64.1	780	64.1
473.astar	8	849	66.2	847	66.3	<b>847</b>	<b>66.3</b>	8	816	68.9	<b>815</b>	<b>68.9</b>	815	68.9
483.xalancbmk	8	614	89.9	614	89.9	<b>614</b>	<b>89.9</b>	8	537	103	536	103	<b>536</b>	<b>103</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
mount -t hugetlbfs nodev /mnt/hugepages
'ulimit -l 2097152' was used to set environment locked pages in memory limit
Set vm/nr_hugepages=1200 in /etc/sysctl.conf
```

## Base Compiler Invocation

C benchmarks:  
pgcc

C++ benchmarks:  
pgcpp

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 104

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECint\_rate\_base2006 = 90.6

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Base Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
--zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w -Mipa=jobs:4

C++ benchmarks:

-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 104

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECint\_rate\_base2006 = 90.6

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -WOPT:if_conv=0 -CG:local_sched_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4
           -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64
           -Bstatic_pgi

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=fast -Mipa=inline:1 -Msmartalloc=huge:150
          -tp barcelona -Bstatic_pgi

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0
           -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfp relaxed
           -Mvect=partial -Msafeptr -Mipa=const -Mipa=ptr -Mipa=arg
           -Mipa=inline -tp barcelona-64 -Bstatic_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=fast(pass 2) -Mipa=inline:1(pass 2)
           -Mipa=noarg(pass 2) -Mpfo(pass 2) -fastsse
           -Msmartalloc=huge:150 -Mfp relaxed -tp barcelona-64
           -Bstatic_pgi

462.libquantum: -fastsse -Mfp relaxed -Msmartalloc=huge:150 -Munroll=m:8
               -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
               -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=fast(pass 2)
             -Mipa=inline(pass 2) -Mpfo=indirect(pass 2) -fastsse
             -Msmartalloc=huge:150 -Mfp relaxed -tp barcelona-64
             -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 104

PowerEdge 2970 (AMD Opteron 2358 SE, 2.4 GHz)

SPECint\_rate\_base2006 = 90.6

CPU2006 license: 55

Test date: May-2008

Test sponsor: Dell Inc.

Hardware Availability: Jun-2008

Tested by: Dell Inc.

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on -IPA:plimit=525  
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-w -Mipa=jobs:4(pass 2)

400.perlbench: No flags used

401.bzip2: -w

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd421GH-flags.20090713.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 19:30:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 19 August 2008.