



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9150M 1.66GHz/24M)

SPECfp_rate2006 = 1540

SPECfp_rate_base2006 = 1460

CPU2006 license: 4


Test date: Jul-2008

Test sponsor: SGI

Hardware Availability: Nov-2007

Tested by: SGI

Software Availability: Jan-2008

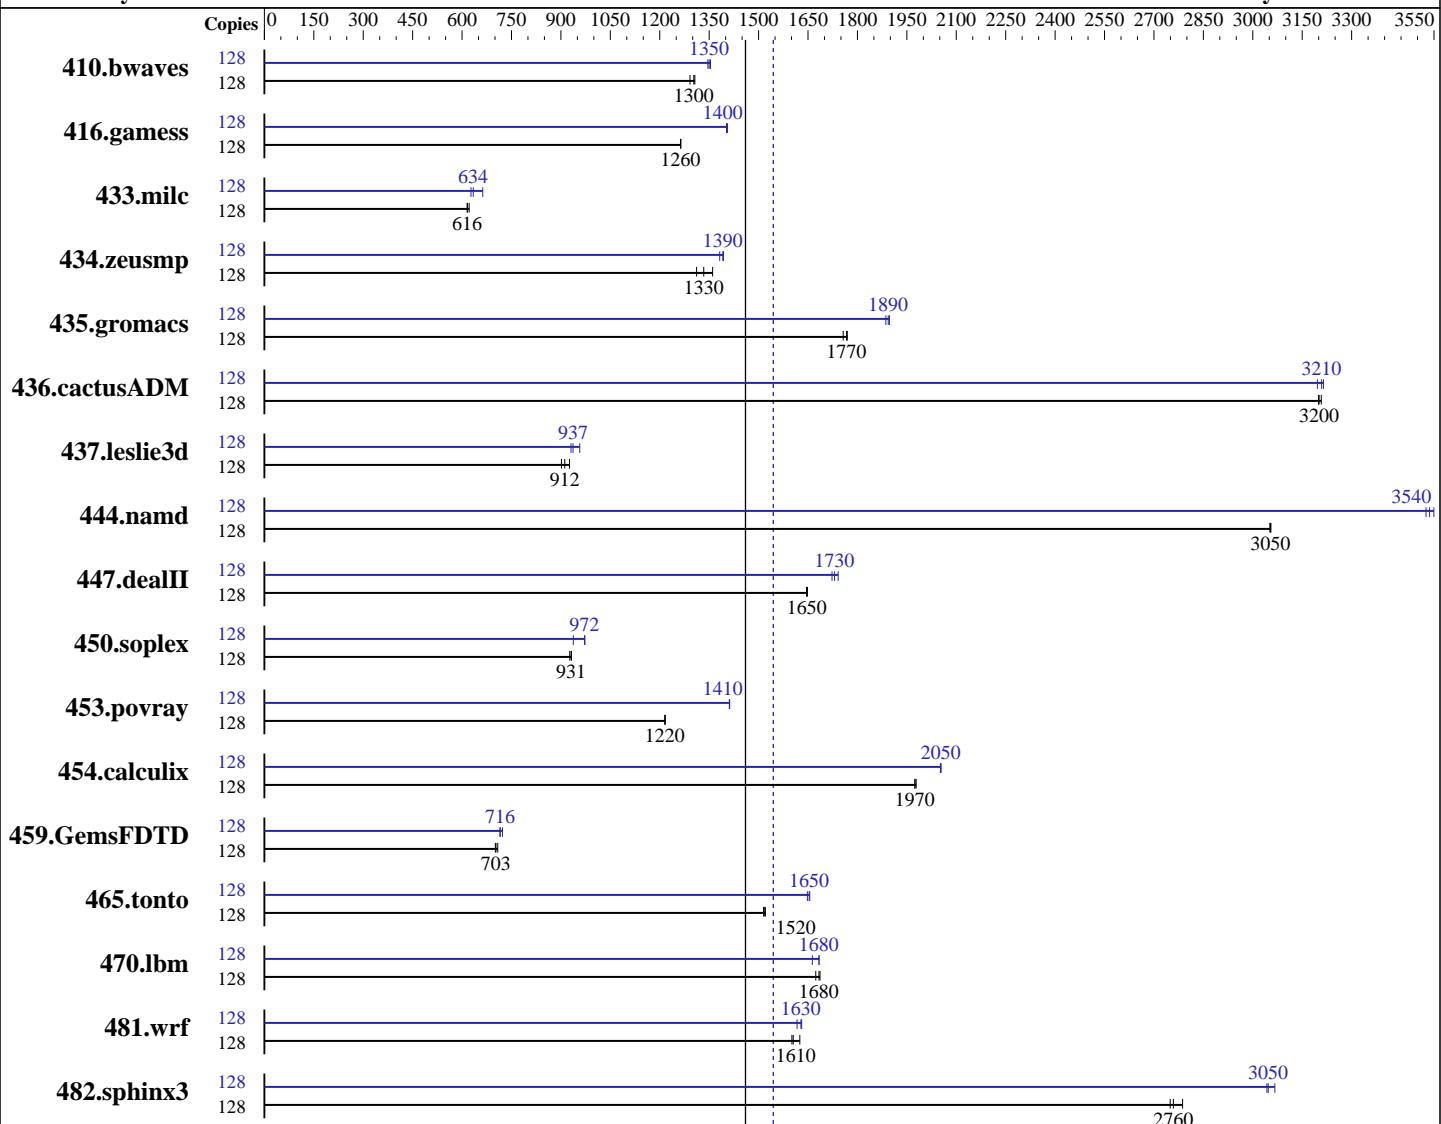

SPECfp_rate_base2006 = 1460

SPECfp_rate2006 = 1540

Hardware

CPU Name: Dual-Core Intel Itanium 9150M
CPU Characteristics: 667MHz FSB
CPU MHz: 1669
FPU: Integrated
CPU(s) enabled: 128 cores, 64 chips, 2 cores/chip
CPU(s) orderable: 8 to 512 blades with 2 chips per blade
Primary Cache: 16 KB I + 16 KB D on chip per core
Secondary Cache: 1 MB I + 256 KB D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (ia64) SP1, Kernel 2.6.16.54-0.2.5-default
Compiler: Intel Fortran Compiler for Linux 10.1 (Build 20071005)
Intel C++ Compiler for Linux 10.1 (Build 20071005)
Auto Parallel: No
File System: xfs
System State: Multi-user

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9150M 1.66GHz/24M)

SPECfp_rate2006 = 1540

SPECfp_rate_base2006 = 1460

CPU2006 license: 4

Test date: Jul-2008

Test sponsor: SGI

Hardware Availability: Nov-2007

Tested by: SGI

Software Availability: Jan-2008

L3 Cache: 12 MB I+D on chip per core
 Other Cache: None
 Memory: 256 GB (8*1GB DDR2-400 DIMMS per 4 core module)
 Disk Subsystem: 2.4 TB RAID 4+1
 32 x 73 GB SCSI (Seagate Cheetah 15k rpm)
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: SGI ProPack 5 Service Pack 4

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1347	1290	1331	1310	<u>1335</u>	<u>1300</u>	128	<u>1289</u>	<u>1350</u>	1292	1350	1285	1350
416.gamess	128	1982	1260	1984	1260	<u>1984</u>	<u>1260</u>	128	<u>1786</u>	<u>1400</u>	1787	1400	1783	1410
433.milc	128	1908	616	<u>1908</u>	<u>616</u>	1891	622	128	<u>1853</u>	<u>634</u>	1874	627	1773	663
434.zeusmp	128	856	1360	888	1310	<u>873</u>	<u>1330</u>	128	<u>837</u>	<u>1390</u>	843	1380	836	1390
435.gromacs	128	517	1770	<u>517</u>	<u>1770</u>	520	1760	128	482	1900	484	1890	<u>483</u>	<u>1890</u>
436.cactusADM	128	<u>478</u>	<u>3200</u>	477	3210	478	3200	128	476	3210	479	3200	<u>477</u>	<u>3210</u>
437.leslie3d	128	1334	902	<u>1320</u>	<u>912</u>	1299	926	128	1293	931	<u>1284</u>	<u>937</u>	1257	957
444.namd	128	<u>336</u>	<u>3050</u>	336	3050	336	3050	128	<u>290</u>	<u>3540</u>	291	3530	289	3550
447.dealII	128	890	1650	888	1650	<u>889</u>	<u>1650</u>	128	850	1720	841	1740	<u>846</u>	<u>1730</u>
450.soplex	128	1152	927	<u>1146</u>	<u>931</u>	1146	932	128	<u>1099</u>	<u>972</u>	1139	938	1097	973
453.povray	128	560	1220	560	1220	<u>560</u>	<u>1220</u>	128	<u>482</u>	<u>1410</u>	483	1410	482	1410
454.calculix	128	534	1980	535	1970	<u>535</u>	<u>1970</u>	128	515	2050	<u>514</u>	<u>2050</u>	514	2050
459.GemsFDTD	128	1937	701	<u>1932</u>	<u>703</u>	1917	708	128	1879	723	1899	715	<u>1897</u>	<u>716</u>
465.tonto	128	831	1520	<u>829</u>	<u>1520</u>	828	1520	128	764	1650	<u>762</u>	<u>1650</u>	761	1660
470.lbm	128	<u>1045</u>	<u>1680</u>	1051	1670	1043	1690	128	1045	1680	1057	1660	<u>1045</u>	<u>1680</u>
481.wrf	128	893	1600	880	1630	<u>891</u>	<u>1610</u>	128	884	1620	877	1630	<u>878</u>	<u>1630</u>
482.sphinx3	128	<u>904</u>	<u>2760</u>	895	2790	907	2750	128	820	3040	813	3070	<u>819</u>	<u>3050</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Processes were bound to CPUs using dplace.
 limit stacksize unlimited

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9150M 1.66GHz/24M)

SPECfp_rate2006 = 1540

SPECfp_rate_base2006 = 1460

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2008

Hardware Availability: Nov-2007

Software Availability: Jan-2008

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_LINUX64_IPF
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -IPF-fp-relaxed -opt-prefetch-next-iteration -ansi-alias

C++ benchmarks:

-fast -IPF-fp-relaxed -opt-prefetch-next-iteration -ansi-alias

Fortran benchmarks:

-fast -IPF-fp-relaxed -opt-prefetch-next-iteration

Benchmarks using both Fortran and C:

-fast -IPF-fp-relaxed -opt-prefetch-next-iteration -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9150M 1.66GHz/24M)

SPECfp_rate2006 = 1540

SPECfp_rate_base2006 = 1460

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2008

Hardware Availability: Nov-2007

Software Availability: Jan-2008

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-fno-alias -ansi-alias

470.lbm: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-ansi-alias

482.sphinx3: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -fno-alias
-no-opt-prefetch-initial-values -ansi-alias

C++ benchmarks:

444.namd: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -no-prefetch -auto-ilp32
-fno-alias -ansi-alias

447.dealII: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-inline-factor=150 -no-alias-args -no-opt-loadpair
-ansi-alias

450.soplex: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -auto-ilp32 -no-alias-args
-ansi-alias

453.povray: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -inline-factor=150 -ansi-alias

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix 4700 Density System (Itanium Processor 9150M 1.66GHz/24M)

SPECfp_rate2006 = 1540

SPECfp_rate_base2006 = 1460

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Jul-2008

Hardware Availability: Nov-2007

Software Availability: Jan-2008

Peak Optimization Flags (Continued)

410.bwaves: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration

416.gamess: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -no-prefetch

434.zeusmp: Same as 410.bwaves

437.leslie3d: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -no-opt-loadpair

459.GemsFDTD: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration

465.tonto: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -inline-factor=150 -no-prefetch

Benchmarks using both Fortran and C:

435.gromacs: -prof_gen(pass 1) -prof_use(pass 2) -fast -IPF-fp-relaxed
-opt-prefetch-next-iteration -no-prefetch -fno-alias
-ansi-alias

436.cactusADM: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-ansi-alias

454.calculix: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-inline-factor=150 -no-opt-prefetch-initial-values
-ansi-alias

481.wrf: -fast -IPF-fp-relaxed -opt-prefetch-next-iteration
-no-opt-loadpair -ansi-alias

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic91-ipf.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic91-ipf.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 19:29:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 August 2008.