



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 23.5

IBM System x3250 M2 (Intel Xeon X3360)

SPECfp_base2006 = 21.6

CPU2006 license: 11


Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

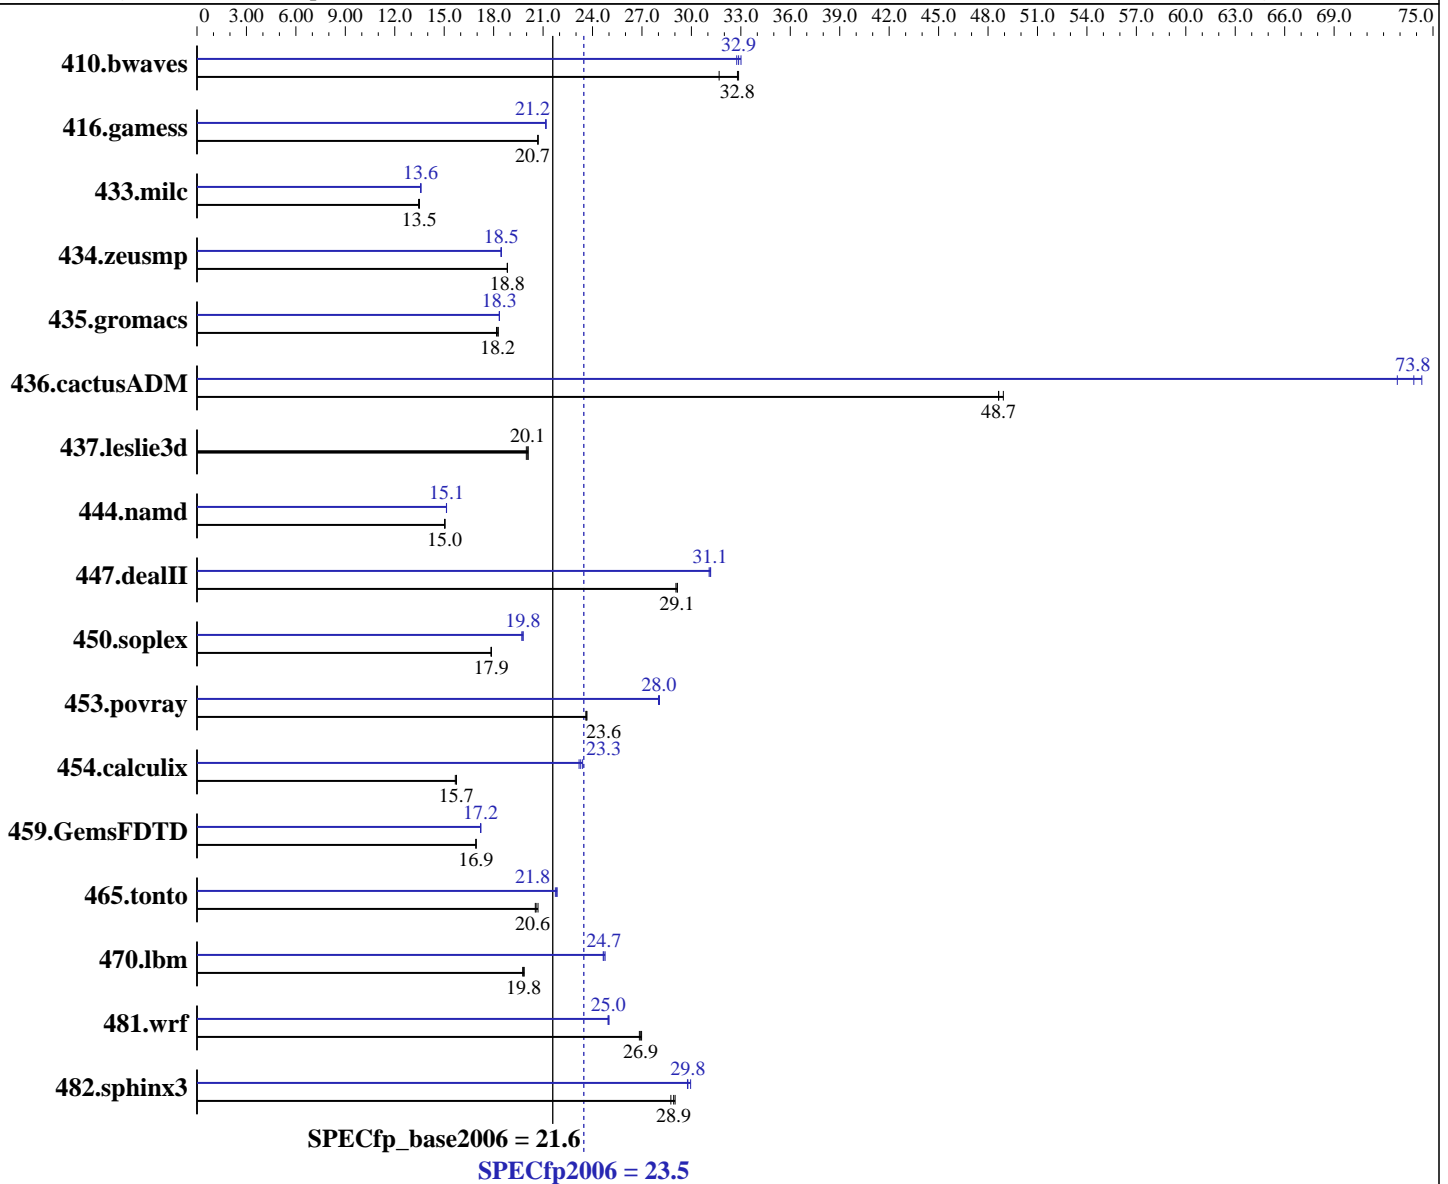

Hardware

CPU Name: Intel Xeon X3360
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2830
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 23.5

IBM System x3250 M2 (Intel Xeon X3360)

SPECfp_base2006 = 21.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 8 GB (4 x 2 GB DDR2-6400E ECC)
Disk Subsystem: 1 x 160 GB SATA, 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	429	31.7	414	32.9	414	32.8	415	32.8	414	32.9	412	33.0
416.gamess	946	20.7	946	20.7	947	20.7	924	21.2	925	21.2	925	21.2
433.milc	680	13.5	683	13.4	681	13.5	676	13.6	675	13.6	676	13.6
434.zeusmp	483	18.8	483	18.8	483	18.8	493	18.4	493	18.5	493	18.5
435.gromacs	391	18.3	391	18.2	393	18.2	389	18.3	389	18.3	389	18.4
436.cactusADM	246	48.7	244	48.9	246	48.6	164	72.8	162	73.8	161	74.3
437.leslie3d	468	20.1	468	20.1	470	20.0	468	20.1	468	20.1	470	20.0
444.namd	533	15.0	533	15.0	533	15.0	530	15.1	530	15.1	530	15.1
447.dealII	392	29.2	394	29.1	393	29.1	367	31.1	368	31.1	367	31.2
450.soplex	467	17.9	467	17.8	467	17.9	421	19.8	422	19.8	423	19.7
453.povray	225	23.6	225	23.6	225	23.7	190	28.1	190	28.0	190	28.0
454.calculix	524	15.7	526	15.7	524	15.7	354	23.3	356	23.2	353	23.4
459.GemsFDTD	627	16.9	626	16.9	627	16.9	616	17.2	617	17.2	617	17.2
465.tonto	476	20.7	478	20.6	479	20.5	450	21.9	451	21.8	452	21.7
470.lbm	692	19.9	693	19.8	695	19.8	555	24.8	557	24.7	557	24.7
481.wrf	414	27.0	415	26.9	416	26.8	447	25.0	448	24.9	448	25.0
482.sphinx3	674	28.9	672	29.0	678	28.8	654	29.8	655	29.8	651	30.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 64-bit mode except 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Enabled
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 23.5

IBM System x3250 M2 (Intel Xeon X3360)

SPECfp_base2006 = 21.6

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -parallel

C++ benchmarks:
-fast -parallel

Fortran benchmarks:
-fast -parallel

Benchmarks using both Fortran and C:
-fast -parallel



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 23.5

IBM System x3250 M2 (Intel Xeon X3360)

SPECfp_base2006 = 21.6

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-req- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 23.5

IBM System x3250 M2 (Intel Xeon X3360)

SPECfp_base2006 = 21.6

CPU2006 license: 11

Test date: Jun-2008

Test sponsor: IBM Corporation

Hardware Availability: Sep-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -parallel -prefetch -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revC.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revC.20090713.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 23.5

IBM System x3250 M2 (Intel Xeon X3360)

SPECfp_base2006 = 21.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 18:59:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 September 2008.