



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

**Sun Fire X2250 (Intel Xeon X5272 3.4GHz)**

**SPECfp®2006 = 25.1**

**SPECfp\_base2006 = 21.4**

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2008

Hardware Availability: Aug-2008

Software Availability: Nov-2007

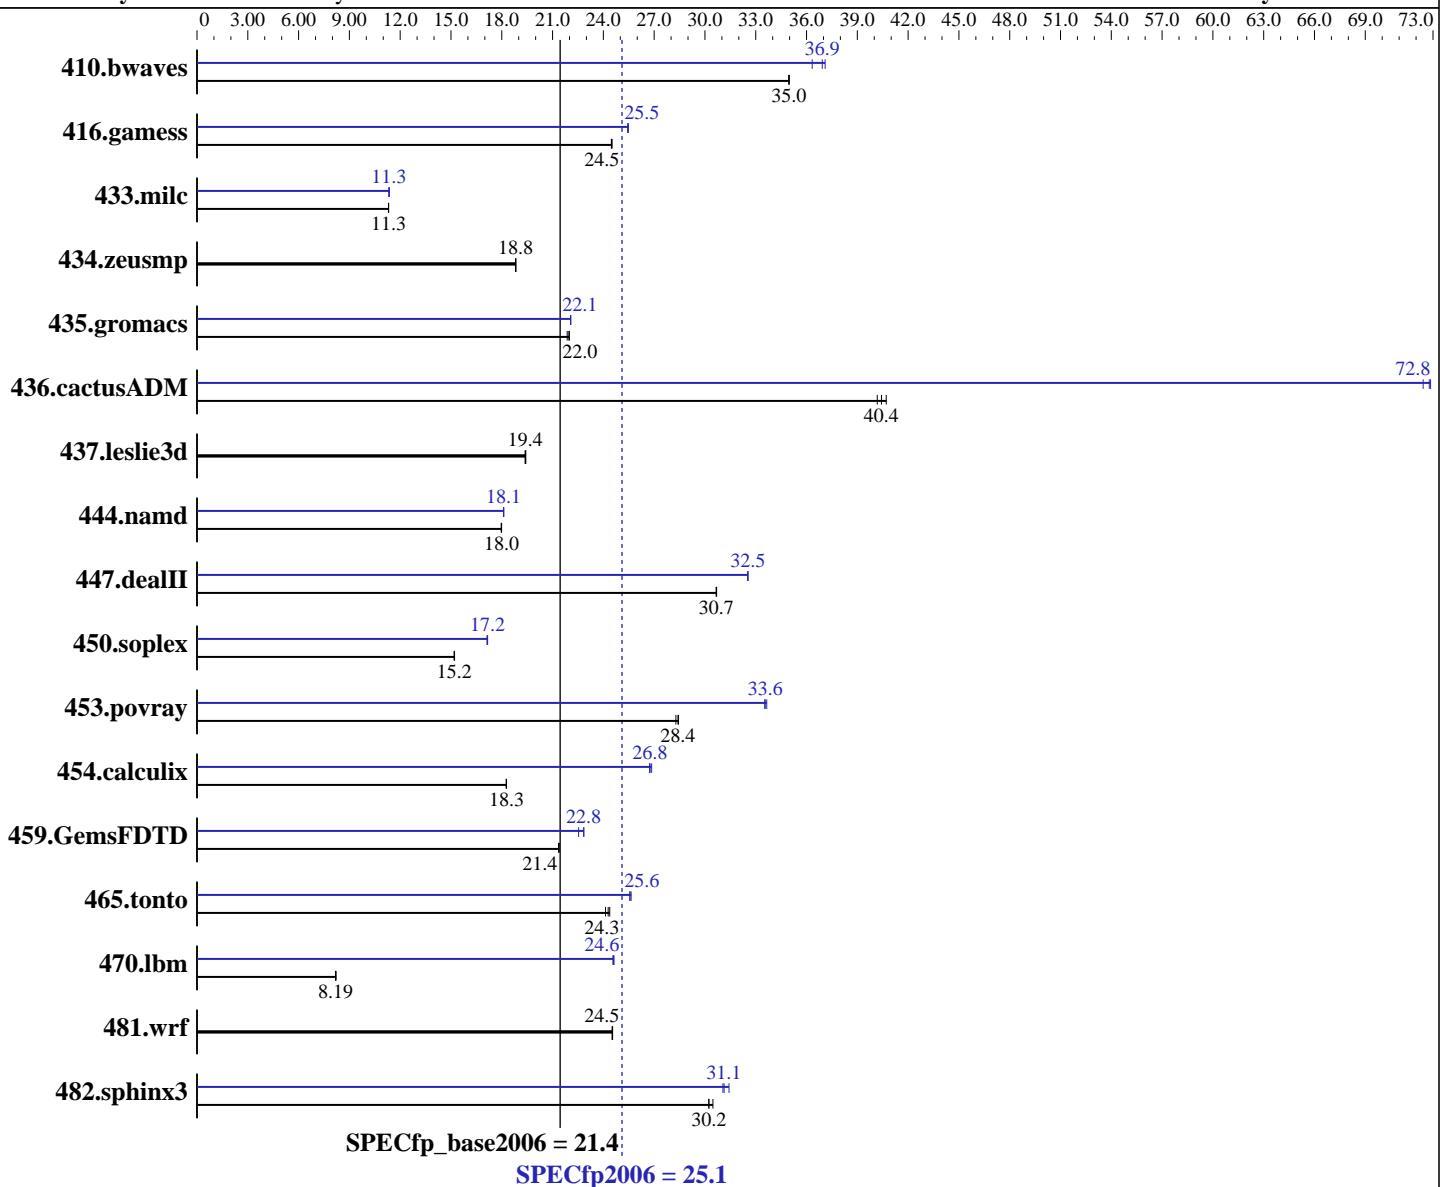

## Hardware

CPU Name: Intel Xeon X5272  
CPU Characteristics: 1600MHz FSB  
CPU MHz: 3400  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 6 MB I+D on chip per chip

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 version 10.1 Build 20070913  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Multi-user, run level 3  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

Sun Fire X2250 (Intel Xeon X5272 3.4GHz)

**SPECfp2006 = 25.1**

CPU2006 license: 6

Test date: Aug-2008

Test sponsor: Sun Microsystems

Hardware Availability: Aug-2008

Tested by: Sun Microsystems

Software Availability: Nov-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (4\*4GB Dual-rank PC2-6400 CL5-5-5 FB-DIMMs)  
 Disk Subsystem: SATA, 500 GB, 7200 RPM  
 Other Hardware: None

Other Software: Binutils 2.17.10.50

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	389	35.0	<b>389</b>	<b>35.0</b>	389	35.0	374	36.3	366	37.1	<b>368</b>	<b>36.9</b>
416.gamess	<b>800</b>	<b>24.5</b>	800	24.5	799	24.5	<b>770</b>	<b>25.4</b>	<b>769</b>	<b>25.5</b>	769	25.5
433.milc	811	11.3	812	11.3	<b>811</b>	<b>11.3</b>	810	11.3	808	11.4	<b>809</b>	<b>11.3</b>
434.zeusmp	484	18.8	<b>483</b>	<b>18.8</b>	483	18.8	484	18.8	<b>483</b>	<b>18.8</b>	483	18.8
435.gromacs	<b>325</b>	<b>22.0</b>	327	21.9	325	22.0	324	22.1	323	22.1	<b>324</b>	<b>22.1</b>
436.cactusADM	<b>296</b>	<b>40.4</b>	294	40.7	297	40.2	<b>165</b>	<b>72.4</b>	<b>164</b>	<b>72.8</b>	164	72.9
437.leslie3d	<b>485</b>	<b>19.4</b>	485	19.4	484	19.4	<b>485</b>	<b>19.4</b>	485	19.4	484	19.4
444.namd	<b>446</b>	<b>18.0</b>	446	18.0	446	18.0	<b>443</b>	<b>18.1</b>	443	18.1	443	18.1
447.dealII	373	30.7	<b>373</b>	<b>30.7</b>	373	30.7	<b>352</b>	<b>32.5</b>	<b>352</b>	<b>32.5</b>	352	32.5
450.soplex	548	15.2	<b>549</b>	<b>15.2</b>	549	15.2	<b>486</b>	<b>17.2</b>	487	17.1	486	17.2
453.povray	188	28.3	187	28.4	<b>187</b>	<b>28.4</b>	158	33.7	159	33.5	<b>159</b>	<b>33.6</b>
454.calculix	451	18.3	452	18.3	<b>451</b>	<b>18.3</b>	309	26.7	<b>308</b>	<b>26.8</b>	307	26.9
459.GemsFDTD	497	21.4	<b>497</b>	<b>21.4</b>	496	21.4	<b>471</b>	<b>22.5</b>	<b>465</b>	<b>22.8</b>	464	22.9
465.tonto	404	24.4	<b>405</b>	<b>24.3</b>	408	24.1	384	25.6	385	25.6	<b>385</b>	<b>25.6</b>
470.lbm	1680	8.18	<b>1678</b>	<b>8.19</b>	1673	8.21	<b>559</b>	<b>24.6</b>	<b>558</b>	<b>24.6</b>	<b>559</b>	<b>24.6</b>
481.wrf	<b>455</b>	<b>24.5</b>	455	24.5	455	24.5	<b>455</b>	<b>24.5</b>	455	24.5	455	24.5
482.sphinx3	640	30.5	645	30.2	<b>645</b>	<b>30.2</b>	620	31.4	627	31.1	<b>626</b>	<b>31.1</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores  
 KMP\_STACK\_SIZE set to 200M  
 KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.

## Platform Notes

BIOS configuration :  
 Hardware Prefetch : Enabled; Adjacent Sector Prefetch : Enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

**Sun Fire X2250 (Intel Xeon X5272 3.4GHz)**

**SPECfp2006 = 25.1**

**SPECfp\_base2006 = 21.4**

**CPU2006 license:** 6

**Test sponsor:** Sun Microsystems

**Tested by:** Sun Microsystems

**Test date:** Aug-2008

**Hardware Availability:** Aug-2008

**Software Availability:** Nov-2007

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

-fast -parallel

C++ benchmarks:

-fast -parallel

Fortran benchmarks:

-fast -parallel

Benchmarks using both Fortran and C:

-fast -parallel



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

**Sun Fire X2250 (Intel Xeon X5272 3.4GHz)**

**SPECfp2006 = 25.1**

**SPECfp\_base2006 = 21.4**

**CPU2006 license:** 6

**Test sponsor:** Sun Microsystems

**Tested by:** Sun Microsystems

**Test date:** Aug-2008

**Hardware Availability:** Aug-2008

**Software Availability:** Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
icc ifort
```

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
    433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
    444.namd: -DSPEC_CPU_LP64  
    447.dealII: -DSPEC_CPU_LP64  
    453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
    465.tonto: -DSPEC_CPU_LP64  
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

**Sun Fire X2250 (Intel Xeon X5272 3.4GHz)**

**SPECfp2006 = 25.1**

**SPECfp\_base2006 = 21.4**

**CPU2006 license:** 6

**Test sponsor:** Sun Microsystems

**Tested by:** Sun Microsystems

**Test date:** Aug-2008

**Hardware Availability:** Aug-2008

**Software Availability:** Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0  
-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.00.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

**Sun Fire X2250 (Intel Xeon X5272 3.4GHz)**

**SPECfp2006 = 25.1**

**SPECfp\_base2006 = 21.4**

**CPU2006 license:** 6

**Test sponsor:** Sun Microsystems

**Tested by:** Sun Microsystems

**Test date:** Aug-2008

**Hardware Availability:** Aug-2008

**Software Availability:** Nov-2007

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:18:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 September 2008.