



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®\_rate2006 = 55.6

PowerEdge 2900 III (Intel Xeon X5260, 3.33 GHz)

SPECfp\_rate\_base2006 = 50.9

CPU2006 license: 55


Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

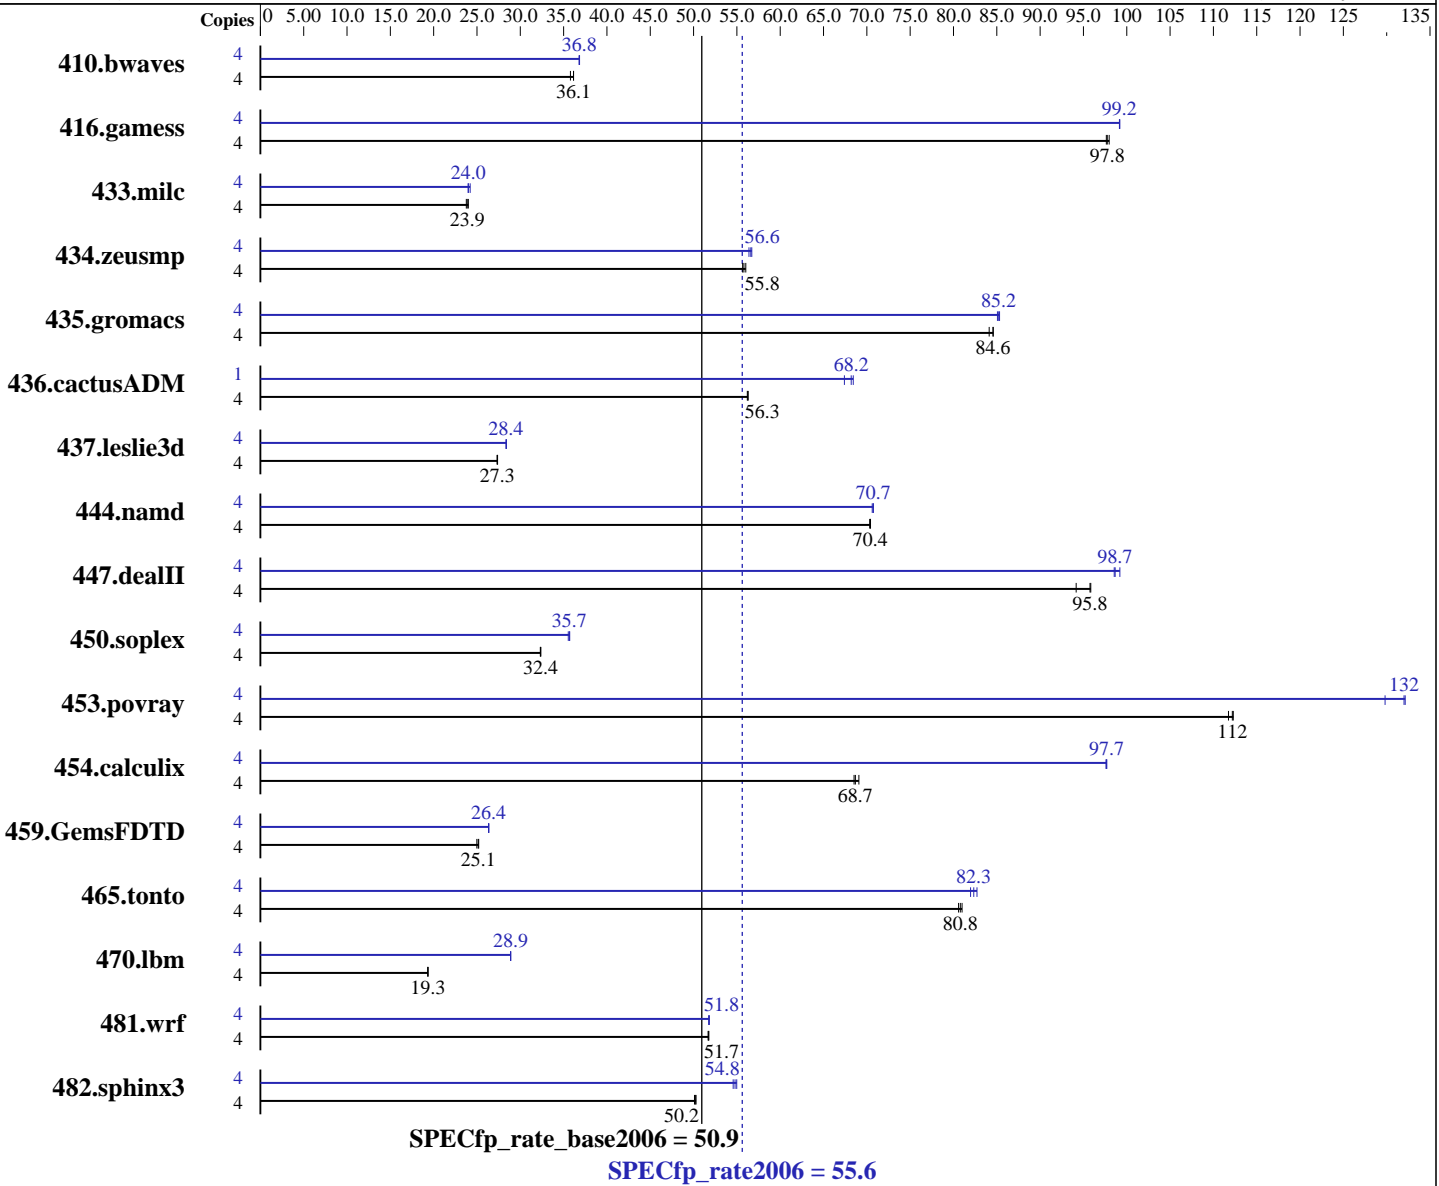

### Hardware

CPU Name: Intel Xeon X5260  
 CPU Characteristics: 3333  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20080312 Package ID: l\_cc\_p\_10.1.015, l\_fc\_p\_10.1.015  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 55.6

PowerEdge 2900 III (Intel Xeon X5260, 3.33 GHz)

SPECfp\_rate\_base2006 = 50.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 x 2 GB, DDR2-667 MHz, CL5, Reg, Dual Rank)  
Disk Subsystem: 2 x 73 GB GB 15000 RPM SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1504	36.2	<b>1504</b>	<b>36.1</b>	1519	35.8	4	1478	36.8	1476	36.8	<b>1476</b>	<b>36.8</b>
416.gamess	4	799	98.0	802	97.6	<b>801</b>	<b>97.8</b>	4	<b>790</b>	<b>99.2</b>	790	99.2	789	99.2
433.milc	4	1545	23.8	1530	24.0	<b>1538</b>	<b>23.9</b>	4	1516	24.2	<b>1530</b>	<b>24.0</b>	1531	24.0
434.zeusmp	4	650	56.0	654	55.7	<b>652</b>	<b>55.8</b>	4	645	56.4	642	56.7	<b>643</b>	<b>56.6</b>
435.gromacs	4	338	84.6	<b>338</b>	<b>84.6</b>	340	84.1	4	336	85.1	<b>335</b>	<b>85.2</b>	335	85.3
436.cactusADM	4	850	56.2	849	56.3	<b>849</b>	<b>56.3</b>	1	177	67.4	<b>175</b>	<b>68.2</b>	175	68.4
437.leslie3d	4	1373	27.4	1376	27.3	<b>1375</b>	<b>27.3</b>	4	<b>1325</b>	<b>28.4</b>	1324	28.4	1325	28.4
444.namd	4	<b>456</b>	<b>70.4</b>	456	70.4	456	70.3	4	454	70.6	453	70.8	<b>454</b>	<b>70.7</b>
447.dealII	4	<b>478</b>	<b>95.8</b>	486	94.2	477	95.8	4	461	99.2	<b>464</b>	<b>98.7</b>	464	98.6
450.soplex	4	<b>1031</b>	<b>32.4</b>	1032	32.3	1031	32.4	4	939	35.5	<b>935</b>	<b>35.7</b>	934	35.7
453.povray	4	<b>190</b>	<b>112</b>	189	112	190	112	4	164	130	161	132	<b>161</b>	<b>132</b>
454.calculix	4	<b>480</b>	<b>68.7</b>	478	69.1	482	68.5	4	338	97.7	338	97.6	<b>338</b>	<b>97.7</b>
459.GemsFDTD	4	1699	25.0	1684	25.2	<b>1688</b>	<b>25.1</b>	4	1611	26.3	<b>1610</b>	<b>26.4</b>	1610	26.4
465.tonto	4	488	80.6	486	81.0	<b>487</b>	<b>80.8</b>	4	476	82.7	480	82.0	<b>478</b>	<b>82.3</b>
470.lbm	4	2843	19.3	<b>2842</b>	<b>19.3</b>	2842	19.3	4	1903	28.9	<b>1903</b>	<b>28.9</b>	1902	28.9
481.wrf	4	863	51.8	864	51.7	<b>864</b>	<b>51.7</b>	4	<b>863</b>	<b>51.8</b>	863	51.8	862	51.8
482.sphinx3	4	1550	50.3	1556	50.1	<b>1553</b>	<b>50.2</b>	4	<b>1423</b>	<b>54.8</b>	1429	54.6	1418	55.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode  
taskset was used to bind processes to cores except  
for 436.cactusADM peak  
OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 64M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 55.6

PowerEdge 2900 III (Intel Xeon X5260, 3.33 GHz)

SPECfp\_rate\_base2006 = 50.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 55.6

PowerEdge 2900 III (Intel Xeon X5260, 3.33 GHz)

SPECfp\_rate\_base2006 = 50.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.015/bin/icc -L/opt/intel/cc/10.1.015/lib
-I/opt/intel/cc/10.1.015/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.015/bin/icpc -L/opt/intel/cc/10.1.015/lib
-I/opt/intel/cc/10.1.015/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.015/bin/ifort -L/opt/intel/fc/10.1.015/lib
-I/opt/intel/fc/10.1.015/include
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 55.6

PowerEdge 2900 III (Intel Xeon X5260, 3.33 GHz)

SPECfp\_rate\_base2006 = 50.9

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revD.20090713.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 55.6

PowerEdge 2900 III (Intel Xeon X5260, 3.33 GHz)

SPECfp\_rate\_base2006 = 50.9

**CPU2006 license:** 55

**Test date:** Aug-2008

**Test sponsor:** Dell Inc.

**Hardware Availability:** Jan-2008

**Tested by:** Dell Inc.

**Software Availability:** May-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-fp-linux64-revD.20090713.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 18:59:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 September 2008.