



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 24.2

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECint_base2006 = 21.1

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2008

Hardware Availability: Jan-2008

Software Availability: May-2008

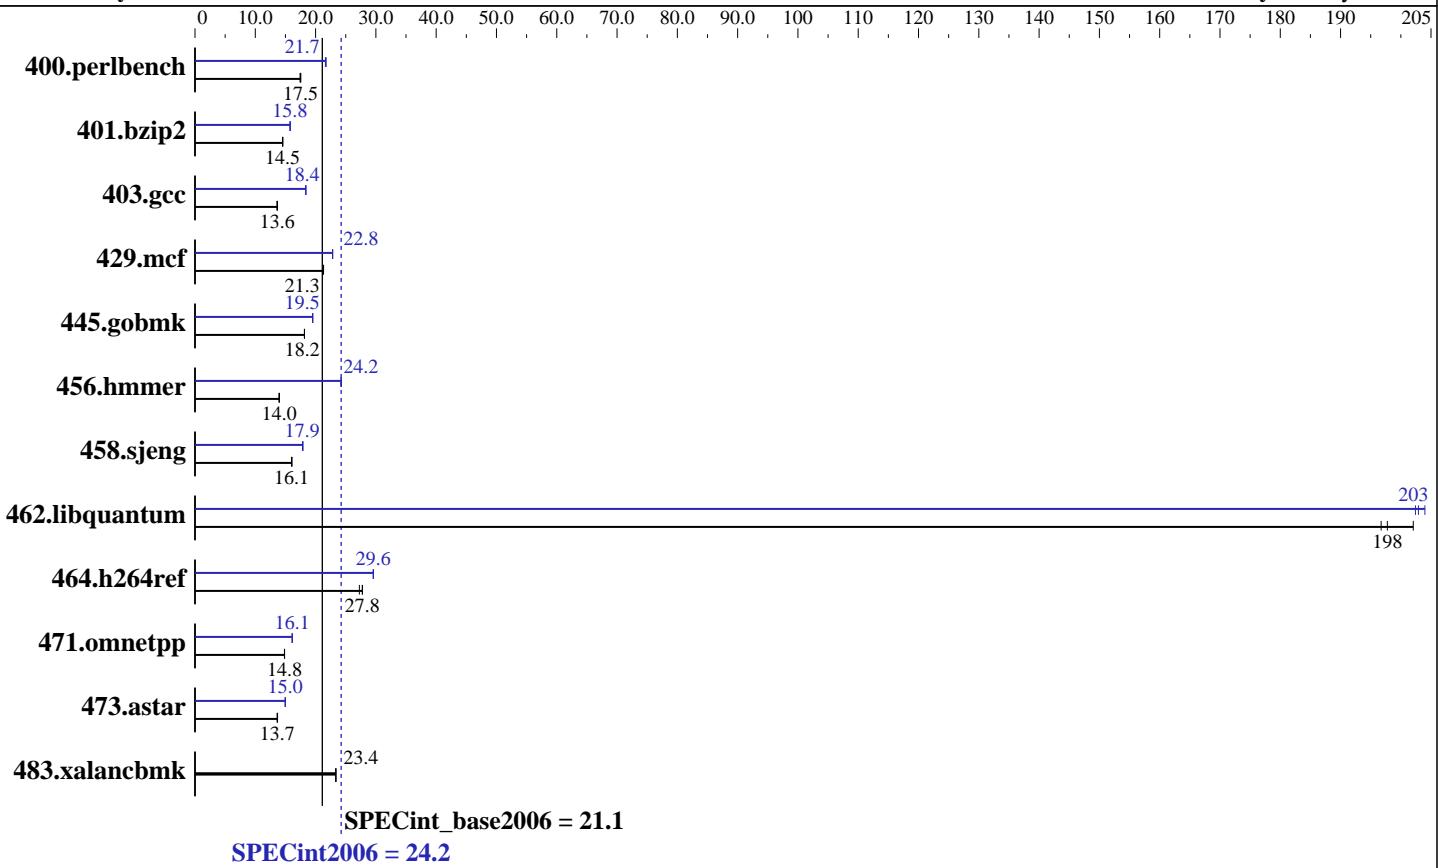

Hardware		Software	
CPU Name:	Intel Xeon E5430	Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16-60.0.21-smp
CPU Characteristics:		Compiler:	Intel C++ Compiler 10.1 for Linux Build 20080312 Package ID: l_cc_p_10.1.015
CPU MHz:	2666	Auto Parallel:	Yes
FPU:	Integrated	File System:	ReiserFS
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip	System State:	Run level 3 (multi-user)
CPU(s) orderable:	1,2 chips	Base Pointers:	32-bit
Primary Cache:	32 KB I + 32 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	12 MB I+D on chip per chip, 6 MB shared / 2 cores	Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502
L3 Cache:	None		
Other Cache:	None		
Memory:	16 GB (4 x 4 GB 667 MHz ECC CL5 FB-DIMM)		
Disk Subsystem:	1 x 80 GB 5400 RPM SATA		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 24.2

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECint_base2006 = 21.1

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	561	17.4	558	17.5	557	17.5	450	21.7	452	21.6	450	21.7
401.bzip2	664	14.5	664	14.5	663	14.5	612	15.8	612	15.8	611	15.8
403.gcc	589	13.7	590	13.6	591	13.6	438	18.4	438	18.4	438	18.4
429.mcf	428	21.3	428	21.3	429	21.2	399	22.8	400	22.8	400	22.8
445.gobmk	578	18.2	578	18.2	578	18.2	537	19.5	537	19.5	537	19.5
456.hammer	669	14.0	667	14.0	667	14.0	385	24.3	385	24.2	385	24.2
458.sjeng	756	16.0	754	16.1	753	16.1	677	17.9	678	17.8	676	17.9
462.libquantum	105	198	103	202	105	197	102	202	102	204	102	203
464.h264ref	797	27.8	812	27.3	797	27.8	748	29.6	748	29.6	748	29.6
471.omnetpp	421	14.8	421	14.9	421	14.8	387	16.1	387	16.1	388	16.1
473.astar	514	13.7	513	13.7	515	13.6	470	14.9	468	15.0	468	15.0
483.xalancbmk	295	23.4	296	23.3	295	23.4	295	23.4	296	23.3	295	23.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hammer, for peak, are compiled in 64-bit mode
 OMP_NUM_THREADS set to number of processors
 KMP_AFFINITY set to "physical,0"

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 462.libquantum: -DSPEC_CPU_LINUX
 483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECint2006 = 24.2

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2008

Hardware Availability: Jan-2008

Software Availability: May-2008

Base Optimization Flags

C benchmarks:

```
-fast -vec-guard-write -parallel -par-runtime-control
```

C++ benchmarks:

```
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
401.bzip2: /opt/intel/cce/10.1.015/bin/icc  
-L/opt/intel/cce/10.1.015/lib  
-I/opt/intel/cce/10.1.015/include
```

```
456.hmmr: /opt/intel/cce/10.1.015/bin/icc  
-L/opt/intel/cce/10.1.015/lib  
-I/opt/intel/cce/10.1.015/include
```

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmr: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 24.2

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECint_base2006 = 21.1

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll12 -ansi-alias -opt-multi-version-aggressive
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll14 -O0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090713.00.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 24.2

PowerEdge M600 (Intel Xeon E5430, 2.66 GHz)

SPECint_base2006 = 21.1

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: May-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-int-linux64-revD.20090713.00.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.07.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:15:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 September 2008.