



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 14.2

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECfp\_base2006 = 12.4

CPU2006 license: 55


Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

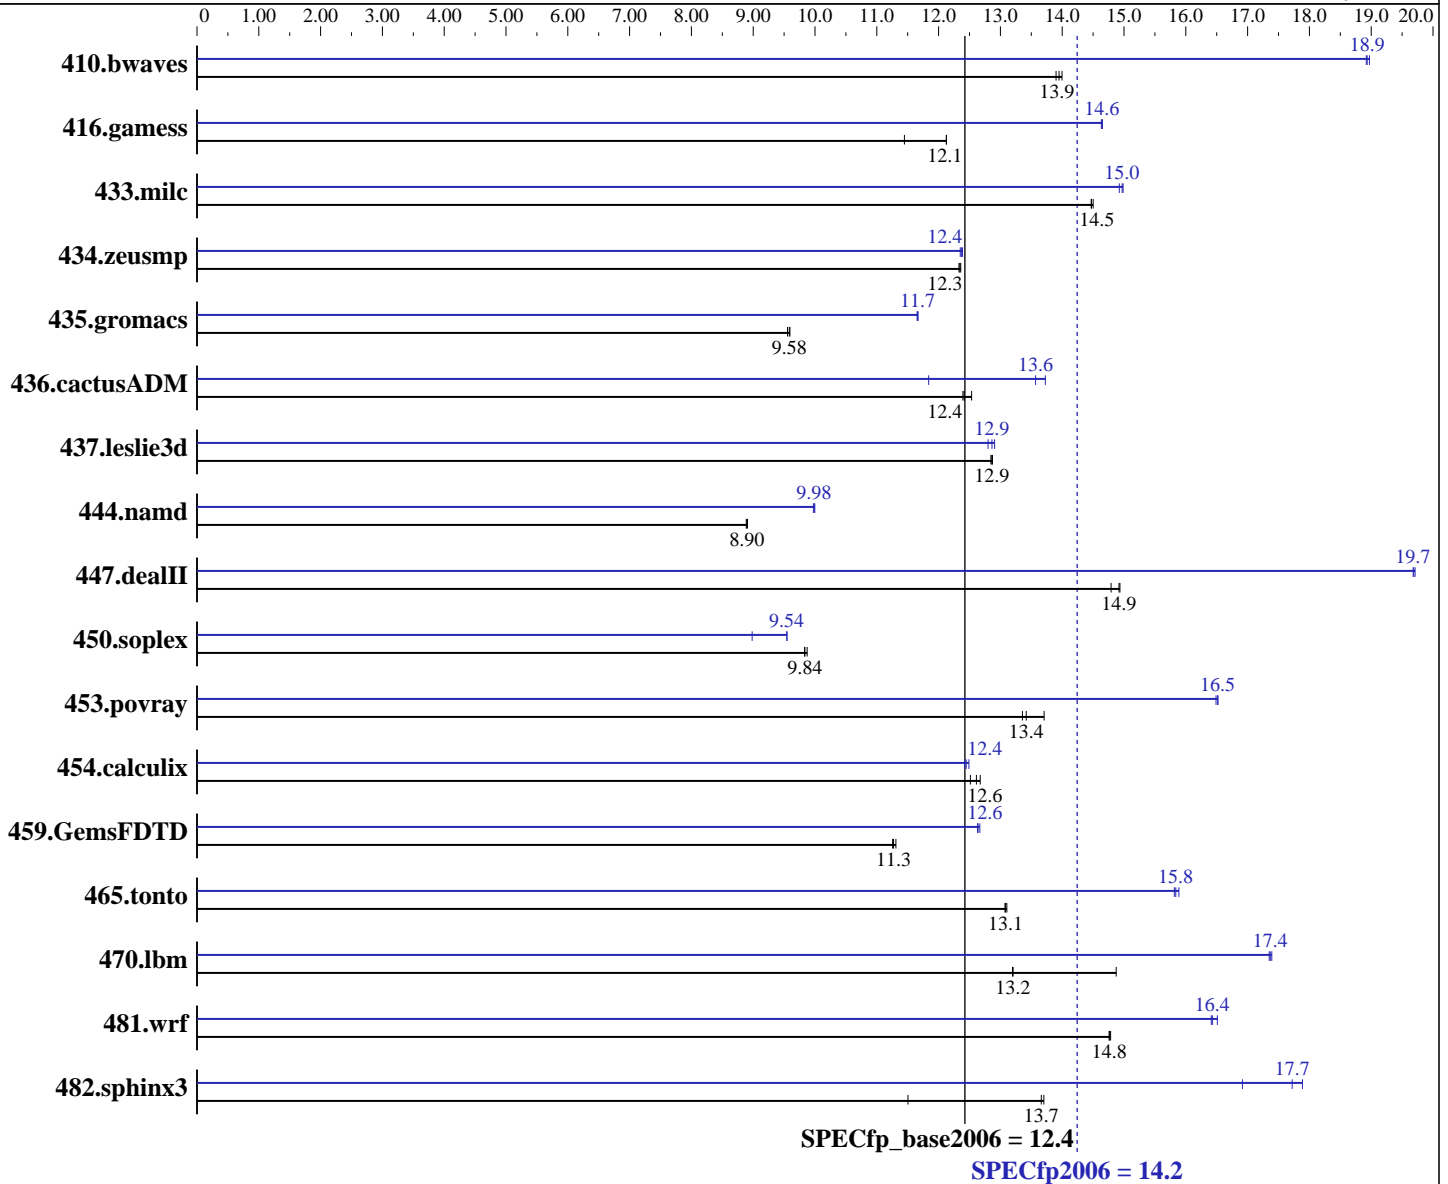

### Hardware

CPU Name: AMD Opteron 2354  
 CPU Characteristics:  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 14.2

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECfp\_base2006 = 12.4

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (8 x 2 GB, DDR2-667, CL5, Reg, Dual Rank)  
Disk Subsystem: 1 x 73 SATA 15000 RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>974</b>	<b>13.9</b>	971	14.0	978	13.9	716	19.0	<b>718</b>	<b>18.9</b>	718	18.9
416.gamess	1711	11.4	<b>1615</b>	<b>12.1</b>	1615	12.1	<b>1337</b>	<b>14.6</b>	1338	14.6	1336	14.7
433.milc	633	14.5	<b>634</b>	<b>14.5</b>	634	14.5	<b>613</b>	<b>15.0</b>	613	15.0	615	14.9
434.zeusmp	736	12.4	<b>737</b>	<b>12.3</b>	738	12.3	735	12.4	737	12.4	<b>736</b>	<b>12.4</b>
435.gromacs	<b>745</b>	<b>9.58</b>	744	9.59	747	9.56	613	11.7	612	11.7	<b>612</b>	<b>11.7</b>
436.cactusADM	964	12.4	953	12.5	<b>963</b>	<b>12.4</b>	871	13.7	<b>881</b>	<b>13.6</b>	1009	11.8
437.leslie3d	730	12.9	732	12.8	<b>731</b>	<b>12.9</b>	<b>731</b>	<b>12.9</b>	734	12.8	728	12.9
444.namd	900	8.91	<b>901</b>	<b>8.90</b>	902	8.89	<b>803</b>	<b>9.98</b>	804	9.97	802	10.0
447.dealII	<b>767</b>	<b>14.9</b>	773	14.8	766	14.9	581	19.7	<b>581</b>	<b>19.7</b>	580	19.7
450.soplex	848	9.83	845	9.87	<b>848</b>	<b>9.84</b>	928	8.98	873	9.55	<b>874</b>	<b>9.54</b>
453.povray	388	13.7	398	13.4	<b>396</b>	<b>13.4</b>	322	16.5	<b>322</b>	<b>16.5</b>	323	16.5
454.calculix	<b>654</b>	<b>12.6</b>	651	12.7	659	12.5	<b>663</b>	<b>12.4</b>	661	12.5	664	12.4
459.GemsFDTD	<b>941</b>	<b>11.3</b>	938	11.3	943	11.3	838	12.7	<b>839</b>	<b>12.6</b>	840	12.6
465.tonto	<b>752</b>	<b>13.1</b>	751	13.1	753	13.1	619	15.9	<b>621</b>	<b>15.8</b>	622	15.8
470.lbm	<b>1040</b>	<b>13.2</b>	1041	13.2	924	14.9	792	17.3	790	17.4	<b>791</b>	<b>17.4</b>
481.wrf	757	14.8	756	14.8	<b>757</b>	<b>14.8</b>	677	16.5	681	16.4	<b>680</b>	<b>16.4</b>
482.sphinx3	<b>1427</b>	<b>13.7</b>	1694	11.5	1422	13.7	1090	17.9	<b>1100</b>	<b>17.7</b>	1152	16.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'numactl' was used to bind copies to the cores  
Environment variable PGI\_HUGE\_PAGES set to 150  
'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2457600' was used to set environment locked pages in memory quantity  
Set vm/nr\_hugepages = 1200 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Base Compiler Invocation

C benchmarks:  
pgcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 14.2

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECfp\_base2006 = 12.4

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
 436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
--zc\_eh -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fast -Mipa=fast -Mipa=inline -Mfprelaxed -Msmartalloc=huge:150  
-tp barcelona-64 -Bstatic\_pgi



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 14.2

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECfp\_base2006 = 12.4

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Other Flags

C benchmarks:  
-w -Mipa=jobs:4

C++ benchmarks:  
-w -Mipa=jobs:4

Fortran benchmarks:  
-w -Mipa=jobs:4

Benchmarks using both Fortran and C:  
-w -Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):  
pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):  
pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):  
pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):  
pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 14.2

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECfp\_base2006 = 12.4

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr -Mipa=shape
-tp barcelona-64 -Bstatic_pgi

```

```

470.lbm: -march=barcelona -Ofast -m3dnow

```

```

482.sphinx3: -march=barcelona -Ofast

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:150
--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8
-tp barcelona-64 -Bstatic_pgi

```

```

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

```

```

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1

```

```

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

Fortran benchmarks:

```

410.bwaves: -Mphi(pass 1) -Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mpfo(pass 2) -fastsse -Mfprelaxed -Msmartalloc
-Mprefetch=distance:12 -Mprefetch=nta -tp barcelona-64
-Bstatic_pgi

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 14.2

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECfp\_base2006 = 12.4

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll\_size=256  
-CG:load\_exe=0 -OPT:malloc\_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-OPT:malloc\_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc\_alg=1  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

436.cactusADM: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=fast  
-Mipa=inline -tp barcelona-64 -Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -OPT:malloc\_alg=1 -m3dnow  
-LANG:copyinout=off -IPA:callee\_limit=5000

## Peak Other Flags

C benchmarks:

433.milc: -w -Mipa=jobs:4

C++ benchmarks:

444.namd: -w -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -w -Mipa=jobs:4(pass 2)

434.zeusmp: -w -Mipa=jobs:4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 14.2

PowerEdge M805 (AMD Opteron 2354, 2.2 GHz)

SPECfp\_base2006 = 12.4

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Aug-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -w -Mipa=jobs:4

454.calculix: -w -Mipa=jobs:4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Sep 13 11:38:54 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 September 2008.