



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5470 processor

SPECfp®_rate2006 = 81.0

SPECfp_rate_base2006 = 72.5

CPU2006 license: 22


Test date: Aug-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Jun-2008

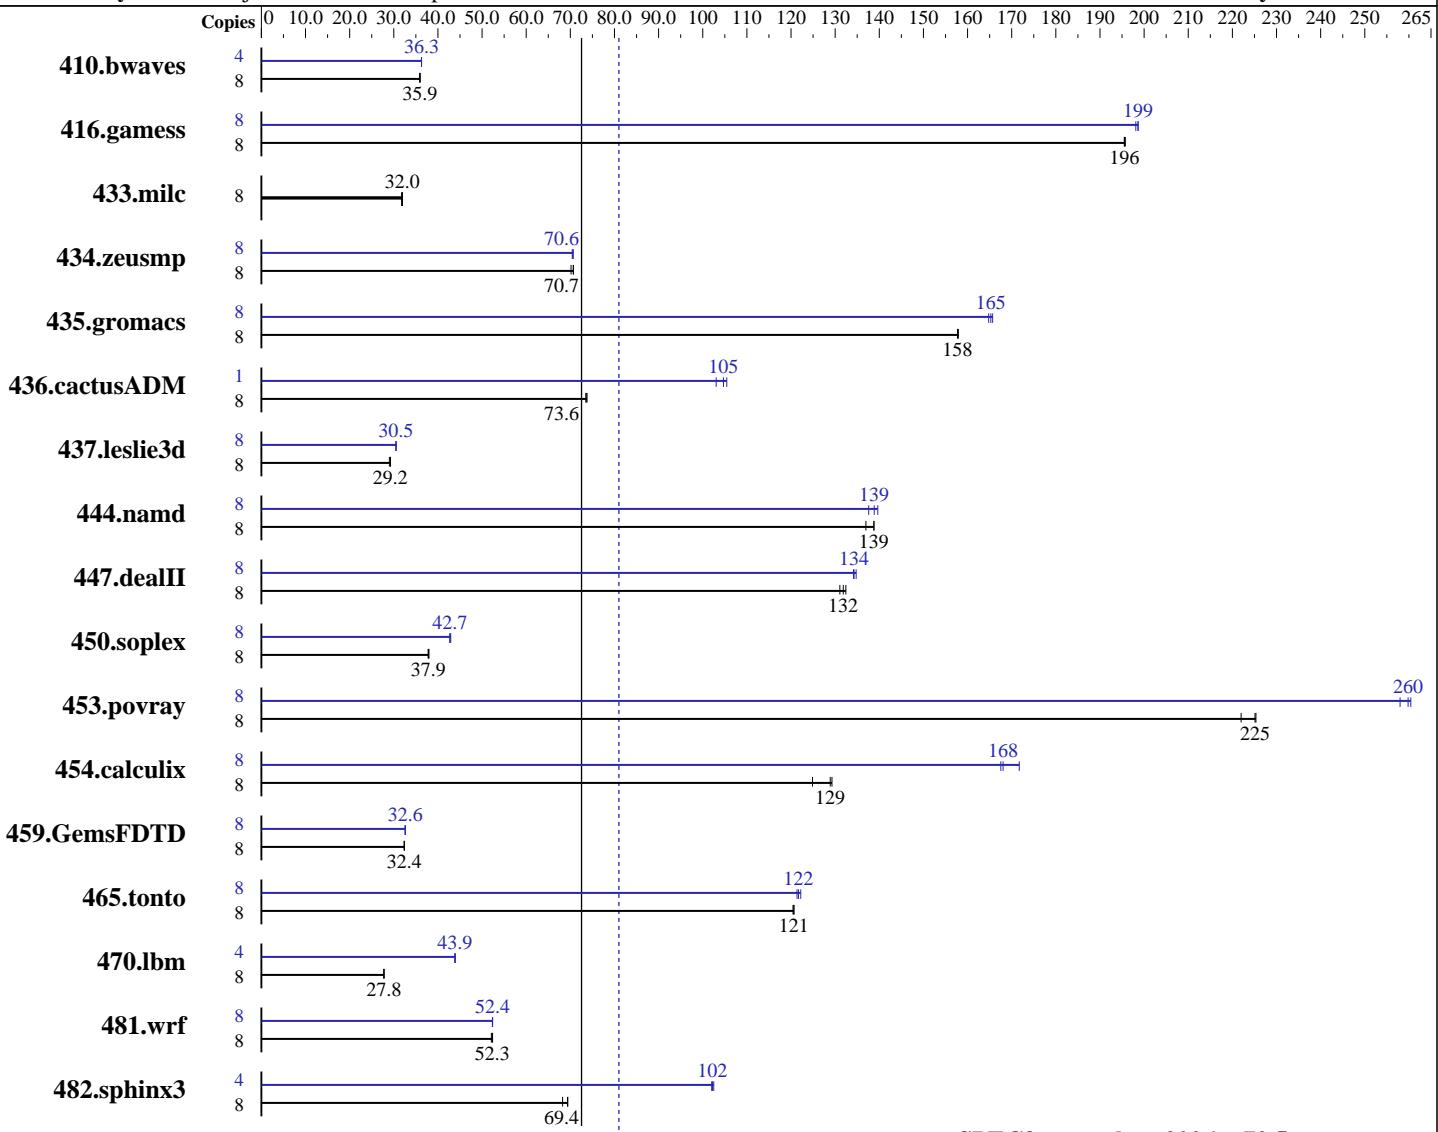

SPECfp_rate_base2006 = 72.5

SPECfp_rate2006 = 81.0

Hardware

CPU Name: Intel Xeon X5470
 CPU Characteristics:
 CPU MHz:
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler for Linux32 and Linux64 Version 10.1 - Build 20080602
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User, Run Level 3
 Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5470 processor

SPECfp_rate2006 = 81.0

SPECfp_rate_base2006 = 72.5

CPU2006 license: 22

Test date: Aug-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Jun-2008

L3 Cache: None
 Other Cache: None
 Memory: 8 GB (8x1 GB DDR2 5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1 x SATA II, 400 GB, 7200 rpm
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: binutils-2.17.50.0.5-0.1.x86_64

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3027	35.9	3024	35.9	3030	35.9	4	1499	36.3	1498	36.3	1498	36.3
416.gamess	8	801	196	801	196	800	196	8	789	199	791	198	789	199
433.milc	8	2312	31.8	2298	32.0	2297	32.0	8	2312	31.8	2298	32.0	2297	32.0
434.zeusmp	8	1030	70.7	1038	70.2	1030	70.7	8	1031	70.6	1031	70.6	1034	70.4
435.gromacs	8	362	158	362	158	362	158	8	347	165	345	166	346	165
436.cactusADM	8	1296	73.8	1299	73.6	1300	73.5	1	116	103	113	105	114	105
437.leslie3d	8	2593	29.0	2574	29.2	2570	29.3	8	2464	30.5	2465	30.5	2464	30.5
444.namd	8	468	137	462	139	462	139	8	466	138	462	139	459	140
447.dealII	8	691	132	694	132	698	131	8	682	134	679	135	682	134
450.soplex	8	1757	38.0	1766	37.8	1762	37.9	8	1561	42.7	1563	42.7	1555	42.9
453.povray	8	189	225	192	222	189	225	8	164	260	165	258	163	260
454.calculix	8	512	129	529	125	511	129	8	393	168	394	168	384	172
459.GemsFDTD	8	2619	32.4	2626	32.3	2618	32.4	8	2602	32.6	2605	32.6	2604	32.6
465.tonto	8	652	121	653	121	654	120	8	644	122	647	122	649	121
470.lbm	8	3959	27.8	3958	27.8	3958	27.8	4	1252	43.9	1254	43.8	1251	43.9
481.wrf	8	1706	52.4	1708	52.3	1715	52.1	8	1706	52.4	1706	52.4	1707	52.3
482.sphinx3	8	2246	69.4	2285	68.2	2248	69.4	4	764	102	763	102	761	102

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Binaries have been built under SLES10 SP1

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run OMP_NUM_THREADS set to number of cores (default).

Platform Notes

BIOS configuration:

Enhanced Speedstep Technology = Disable

C1 Enhanced Mode = Disable

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5470 processor

SPECfp_rate2006 = 81.0

SPECfp_rate_base2006 = 72.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Jun-2008

Platform Notes (Continued)

SnoopFilter = Enable

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5470 processor

SPECfp_rate2006 = 81.0

SPECfp_rate_base2006 = 72.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Jun-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast

Peak Compiler Invocation

C benchmarks (except as noted below):

/opt/intel/cc/10.1.017/bin/icc -L/opt/intel/cc/10.1.017/lib
-I/opt/intel/cc/10.1.017/include

433.milc: icc

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/cc/10.1.017/bin/icpc -L/opt/intel/cc/10.1.017/lib
-I/opt/intel/cc/10.1.017/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/fc/10.1.017/bin/ifort -L/opt/intel/fc/10.1.017/lib
-I/opt/intel/fc/10.1.017/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5470 processor

SPECfp_rate2006 = 81.0

SPECfp_rate_base2006 = 72.5

CPU2006 license: 22

Test date: Aug-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Jun-2008

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-scalar-rep -prefetch -opt-malloc-options=3

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -O0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

CELSIUS R650, Intel Xeon X5470 processor

SPECfp_rate2006 = 81.0

SPECfp_rate_base2006 = 72.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Aug-2008

Hardware Availability: Sep-2008

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/flags-ic101-linux-intel64.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 19:37:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 September 2008.