



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = 53.3

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp_rate_base2006 = 51.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Apr-2008

Software Availability: Nov-2007

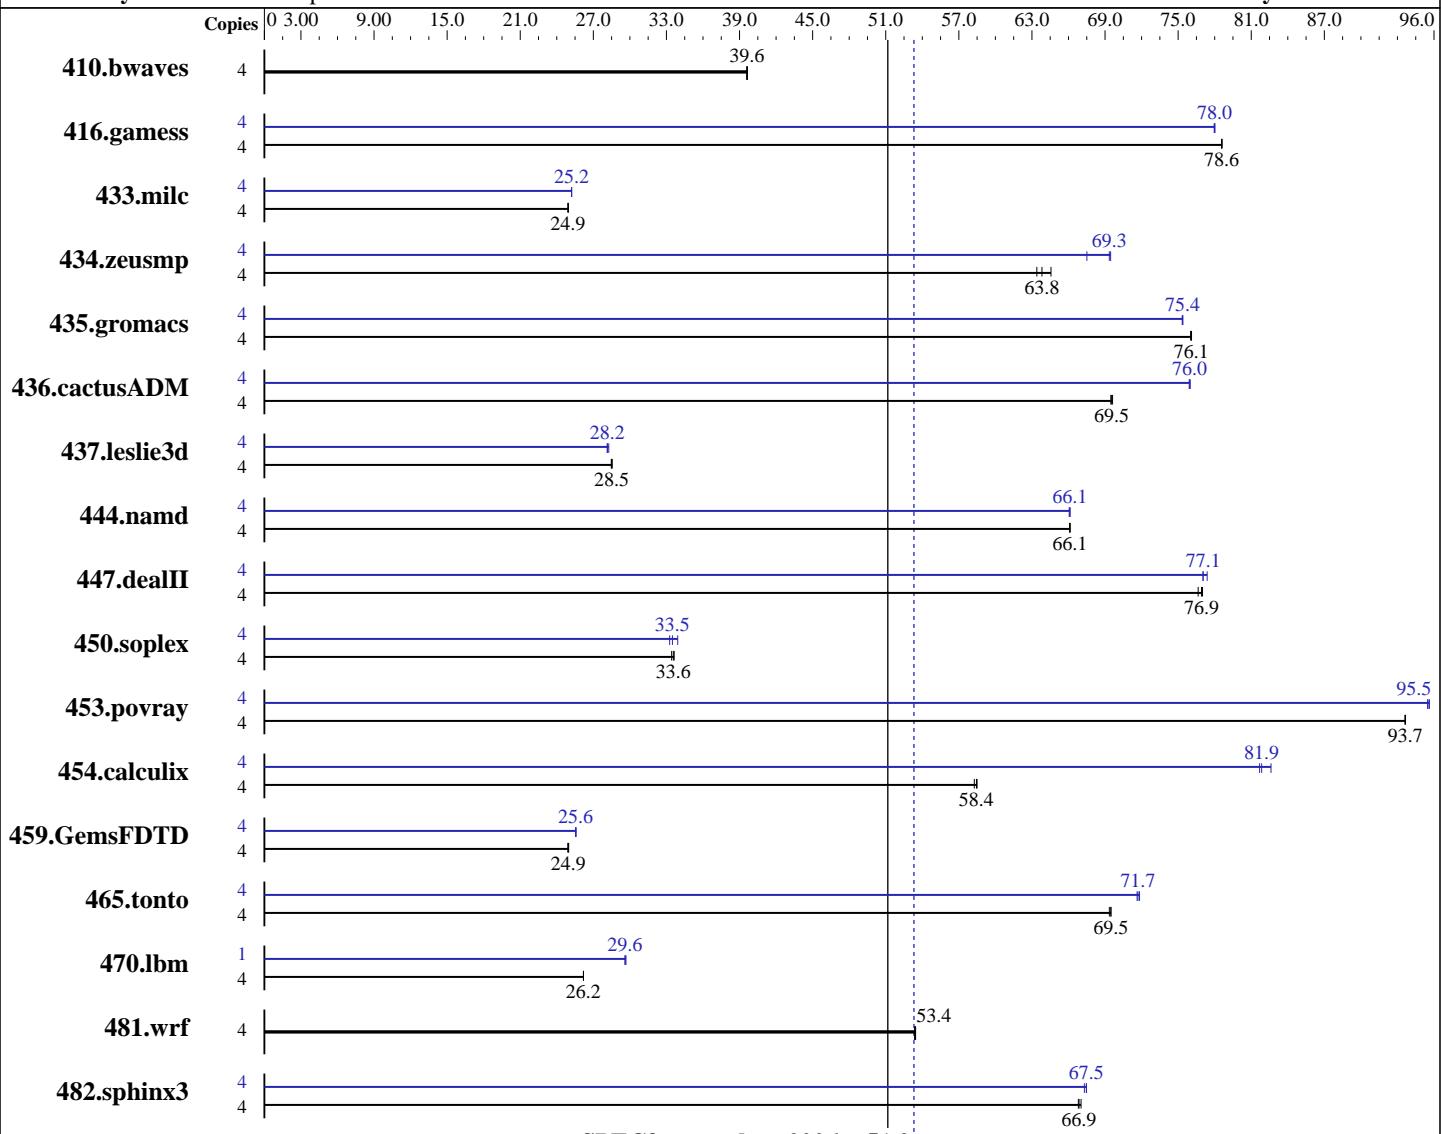

SPECfp_rate_base2006 = 51.2

SPECfp_rate2006 = 53.3

Hardware

CPU Name: Intel Core 2 Extreme QX9770
 CPU Characteristics: 3.20 GHz 1600 FSB
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: Windows Vista64 Ultimate
 Compiler: Intel C++ Compiler for IA32 version 10.1
 Build 20070913 Package ID: w_cc_p_10.1.011
 Intel Fortran Compiler for IA32 version 10.1
 Build 20070913 Package ID: w_fc_p_10.1.011
 Microsoft Visual Studio 2005 SP1 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 53.3

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp_rate_base2006 = 51.2

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Apr-2008

Tested by: Intel Corporation

Software Availability: Nov-2007

L3 Cache:	None	Base Pointers:	32-bit
Other Cache:	None	Peak Pointers:	32-bit
Memory:	4 GB (4x1GB Corsair TWIN3X2048-1333C9DHX DDR3-1333 CL9)	Other Software:	SmartHeap Library Version 8.1 from http://www.microquill.com/
Disk Subsystem:	Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM		
Other Hardware:	None		

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1373	39.6	<u>1372</u>	<u>39.6</u>	1371	39.6	4	1373	39.6	<u>1372</u>	<u>39.6</u>	1371	39.6		
416.gamess	4	997	78.6	<u>997</u>	<u>78.6</u>	996	78.6	4	<u>1004</u>	<u>78.0</u>	1004	78.0	<u>1005</u>	<u>78.0</u>		
433.milc	4	1474	24.9	1472	24.9	<u>1473</u>	<u>24.9</u>	4	1456	25.2	<u>1456</u>	<u>25.2</u>	1457	25.2		
434.zeusmp	4	<u>570</u>	<u>63.8</u>	574	63.4	564	64.6	4	<u>525</u>	<u>69.3</u>	524	69.5	<u>539</u>	<u>67.5</u>		
435.gromacs	4	<u>375</u>	<u>76.1</u>	375	76.1	376	76.0	4	<u>379</u>	<u>75.4</u>	379	75.3	<u>379</u>	<u>75.4</u>		
436.cactusADM	4	<u>687</u>	<u>69.5</u>	687	69.6	688	69.5	4	<u>630</u>	<u>75.9</u>	<u>629</u>	<u>76.0</u>	629	76.0		
437.leslie3d	4	1321	28.5	1317	28.6	<u>1320</u>	<u>28.5</u>	4	1330	28.3	1336	28.1	<u>1335</u>	<u>28.2</u>		
444.namd	4	485	66.1	485	66.1	<u>485</u>	<u>66.1</u>	4	<u>485</u>	<u>66.1</u>	485	66.1	486	66.1		
447.dealII	4	<u>595</u>	<u>76.9</u>	594	77.0	597	76.6	4	594	77.0	591	77.4	<u>594</u>	<u>77.1</u>		
450.soplex	4	992	33.6	<u>994</u>	<u>33.6</u>	998	33.4	4	983	33.9	1003	33.3	<u>996</u>	<u>33.5</u>		
453.povray	4	227	93.6	<u>227</u>	<u>93.7</u>	227	93.7	4	<u>223</u>	<u>95.5</u>	223	95.6	223	95.5		
454.calculix	4	564	58.5	<u>565</u>	<u>58.4</u>	566	58.3	4	404	81.7	<u>403</u>	<u>81.9</u>	399	82.6		
459.GemsFDTD	4	1704	24.9	1699	25.0	<u>1702</u>	<u>24.9</u>	4	1661	25.5	<u>1661</u>	<u>25.6</u>	1659	25.6		
465.tonto	4	<u>567</u>	<u>69.5</u>	566	69.5	568	69.4	4	<u>549</u>	<u>71.7</u>	548	71.8	549	71.6		
470.lbm	4	2098	26.2	2099	26.2	<u>2098</u>	<u>26.2</u>	1	463	29.7	<u>464</u>	<u>29.6</u>	464	29.6		
481.wrf	4	837	53.4	836	53.5	<u>836</u>	<u>53.4</u>	4	837	53.4	836	53.5	<u>836</u>	<u>53.4</u>		
482.sphinx3	4	1163	67.0	<u>1166</u>	<u>66.9</u>	1167	66.8	4	<u>1156</u>	<u>67.5</u>	1155	67.5	1158	67.3		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply Product description located as of 9/2008:

<http://www.asus.com/products.aspx?modelmenu=1&model=2069&l1=3&l2=11&l3=640&l4=0>

The system bus runs at 1600 MHz

System was configured with Asus EN8800GTX discrete graphics card

Binaries were built on Windows Vista32

The following VS 2005 SP1 updates were applied: KB926601 and KB932232

Base Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp_rate2006 = 53.3

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Apr-2008

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:

 icl -Qvc8

Fortran benchmarks:

 ifort

Benchmarks using both Fortran and C:

 icl -Qvc8 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore

 444.namd: -TP

 447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG

 453.povray: -DSPEC_CPU_WINDOWS_ICL

 454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

 481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

 -fast /F1000000000

C++ benchmarks:

 -fast -Qcxx_features /F1000000000 shlw32m.lib
 -link /FORCE:MULTIPLE

Fortran benchmarks:

 -fast /F1000000000

Benchmarks using both Fortran and C:

 -fast /F1000000000

Peak Compiler Invocation

C benchmarks:

 icl -Qvc8 -Qc99

C++ benchmarks:

 icl -Qvc8

Fortran benchmarks:

 ifort

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp_rate2006 = 53.3

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Apr-2008

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

Peak Portability Flags

```

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fast -Qunroll12 -Oa /F1000000000
470.lbm: -fast -Qunroll12 -Qscalar-rep- -Qprefetch /F1000000000
482.sphinx3: -fast -Qunroll12 /F1000000000

```

C++ benchmarks:

```

444.namd: -fast -Oa -Qcxx_features /F1000000000 shlw32m.lib
           -link /FORCE:MULTIPLE
447.dealII: -fast -Qunroll12 -Qprefetch -Qcxx_features /F1000000000
            shlw32m.lib          -link /FORCE:MULTIPLE
450.soplex: -fast -Qcxx_features /F1000000000 shlw32m.lib
            -link /FORCE:MULTIPLE
453.povray: -fast -Qunroll4 -Qansi-alias -Qcxx_features /F1000000000
            shlw32m.lib          -link /FORCE:MULTIPLE

```

Fortran benchmarks:

```

410.bwaves: basepeak = yes
416.gamess: -fast -Qunroll12 -Ob0 -Qansi-alias -Qscalar-rep-
             /F1000000000
434.zeusmp: -QxT -O2 -Qprec-div- -Qunroll0 -Qscalar-rep- /F1000000000

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 53.3

Asus P5E3 Premium (Intel Core 2 Extreme QX9770)

SPECfp_rate_base2006 = 51.2

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Apr-2008

Tested by: Intel Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

437.leslie3d: -fast -Qprefetch /F1000000000

459.GemsFDTD: -fast -Qunroll12 -Ob0 -Qprefetch /F1000000000

465.tonto: -fast -Qunroll14 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -fast -Oa -Qprefetch /F1000000000

436.cactusADM: -fast -Qunroll12 -Qprefetch /F1000000000

454.calculix: -fast -Qunroll-aggressive /F1000000000

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-revC.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-win32-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 18:41:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 30 September 2008.