



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp[®]_rate2006 = 83.5

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_rate_base2006 = 76.5

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

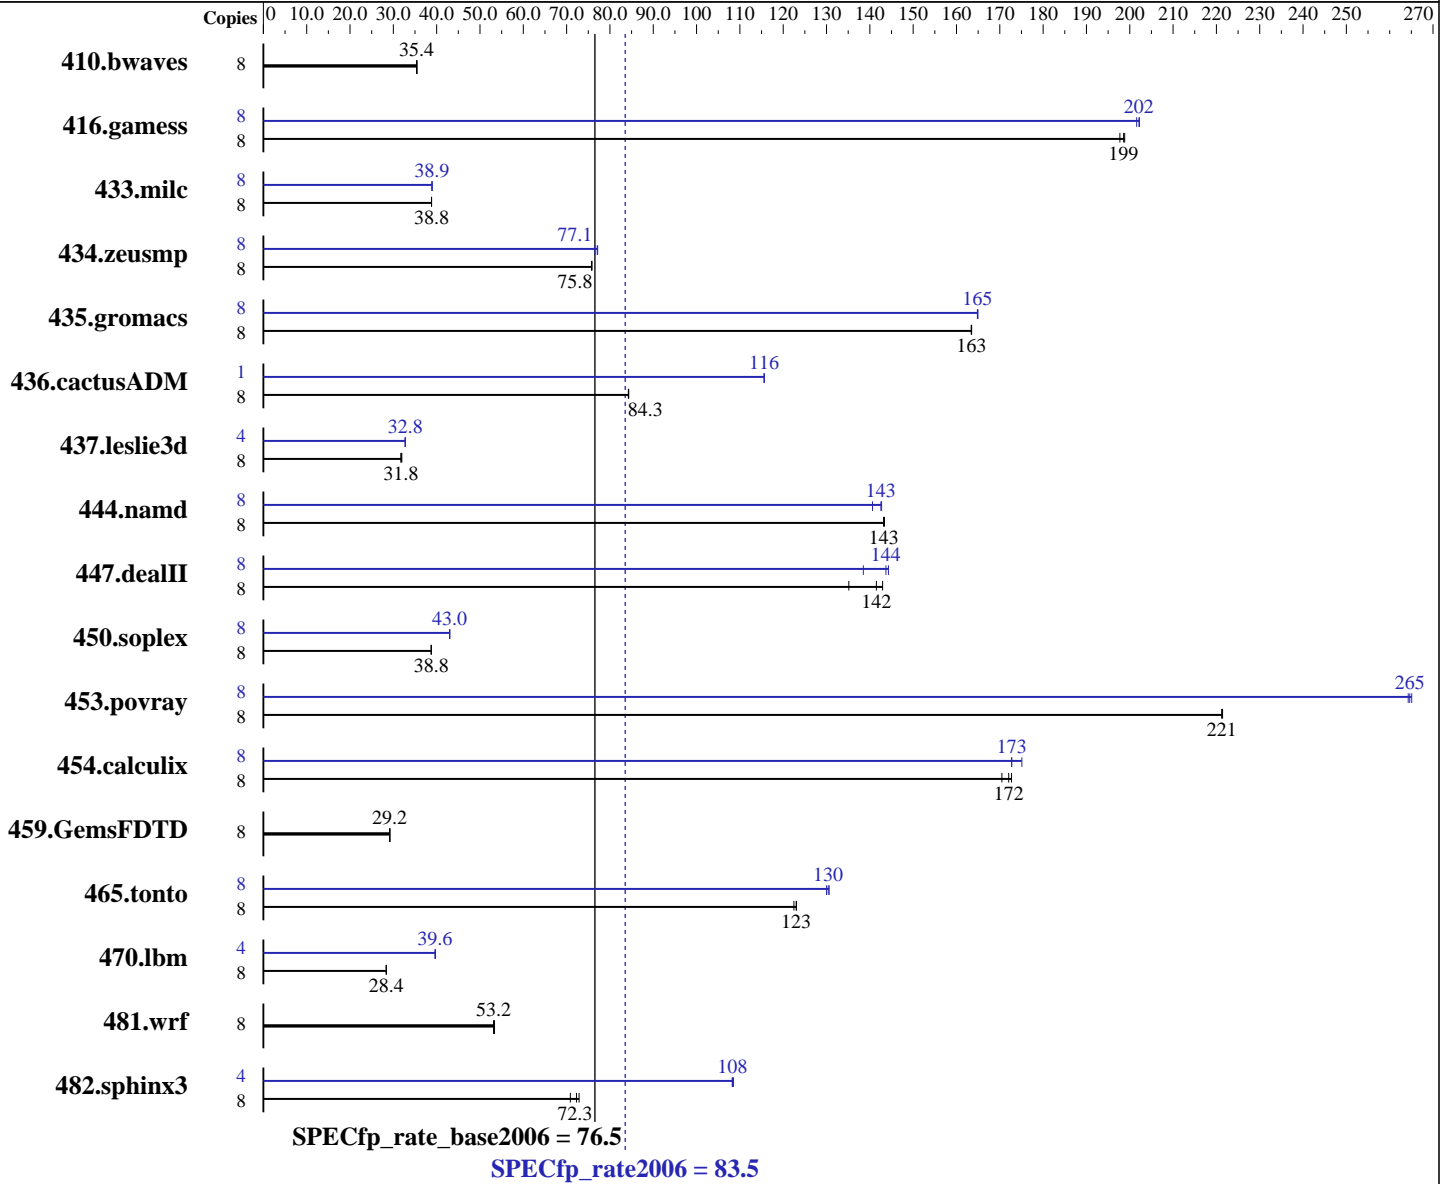

Hardware

CPU Name: Intel Xeon X5470
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = **83.5**

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_rate_base2006 = **76.5**

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x SATA, 160 GB, 7200 rpm
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3065	35.5	3075	35.4	<u>3071</u>	<u>35.4</u>	8	3065	35.5	3075	35.4	<u>3071</u>	<u>35.4</u>
416.gamess	8	792	198	788	199	<u>789</u>	<u>199</u>	8	<u>775</u>	<u>202</u>	777	202	774	202
433.milc	8	1892	38.8	<u>1892</u>	<u>38.8</u>	1892	38.8	8	1886	38.9	1886	38.9	<u>1886</u>	<u>38.9</u>
434.zeusmp	8	960	75.9	<u>961</u>	<u>75.8</u>	961	75.7	8	951	76.5	943	77.2	<u>945</u>	<u>77.1</u>
435.gromacs	8	350	163	<u>349</u>	<u>163</u>	349	164	8	<u>347</u>	<u>165</u>	346	165	347	165
436.cactusADM	8	1135	84.3	<u>1134</u>	<u>84.3</u>	1134	84.3	1	103	116	<u>103</u>	<u>116</u>	103	116
437.leslie3d	8	2353	32.0	<u>2367</u>	<u>31.8</u>	2367	31.8	4	1148	32.8	<u>1148</u>	<u>32.8</u>	1149	32.7
444.namd	8	<u>448</u>	<u>143</u>	448	143	447	143	8	456	141	<u>450</u>	<u>143</u>	450	143
447.dealII	8	640	143	<u>647</u>	<u>142</u>	677	135	8	634	144	<u>637</u>	<u>144</u>	661	138
450.soplex	8	<u>1721</u>	<u>38.8</u>	1721	38.8	1722	38.7	8	1551	43.0	1552	43.0	<u>1551</u>	<u>43.0</u>
453.povray	8	<u>192</u>	<u>221</u>	192	221	192	221	8	161	265	<u>161</u>	<u>265</u>	161	264
454.calculix	8	382	173	387	170	<u>384</u>	<u>172</u>	8	<u>382</u>	<u>173</u>	382	173	377	175
459.GemsFDTD	8	2906	29.2	2910	29.2	<u>2910</u>	<u>29.2</u>	8	2906	29.2	2910	29.2	<u>2910</u>	<u>29.2</u>
465.tonto	8	<u>640</u>	<u>123</u>	640	123	643	122	8	603	131	606	130	<u>604</u>	<u>130</u>
470.lbm	8	3875	28.4	<u>3874</u>	<u>28.4</u>	3871	28.4	4	1383	39.7	1386	39.6	<u>1386</u>	<u>39.6</u>
481.wrf	8	1675	53.4	<u>1680</u>	<u>53.2</u>	1681	53.1	8	1675	53.4	<u>1680</u>	<u>53.2</u>	1681	53.1
482.sphinx3	8	2139	72.9	2200	70.9	<u>2157</u>	<u>72.3</u>	4	720	108	718	109	<u>720</u>	<u>108</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

All binaries were built with 64-bit mode except:
437.leslie3d, 450.soplex and 482.sphinx3 in peak
were built with 32-bit mode.

Submit Notes

The config file option 'submit' was used.
taskset has been used to bind processes to cores except
for 436.cactusADM peak



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 83.5

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_rate_base2006 = 76.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable
Memory Throttling = Enable

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 83.5

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_rate_base2006 = 76.5

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
 -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
 -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:
 -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
 -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
 icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
 -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
 -I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):
 icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
 -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
 -I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks (except as noted below):
 ifort

437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/fort
 -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
 -I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Benchmarks using both Fortran and C:
 icc ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 83.5

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_rate_base2006 = 76.5

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Sep-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
        -auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

```

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
          -no-prec-div -static -unroll2 -Ob0 -ansi-alias
          -scalar-rep-

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 83.5

PRIMERGY RX200 S4, Intel Xeon X5470, 3.33 GHz

SPECfp_rate_base2006 = 76.5

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Sep-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.08.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.08.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:51:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 October 2008.