



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp[®]_rate2006 = 61.5

PRIMERGY RX200 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate_base2006 = 57.7

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

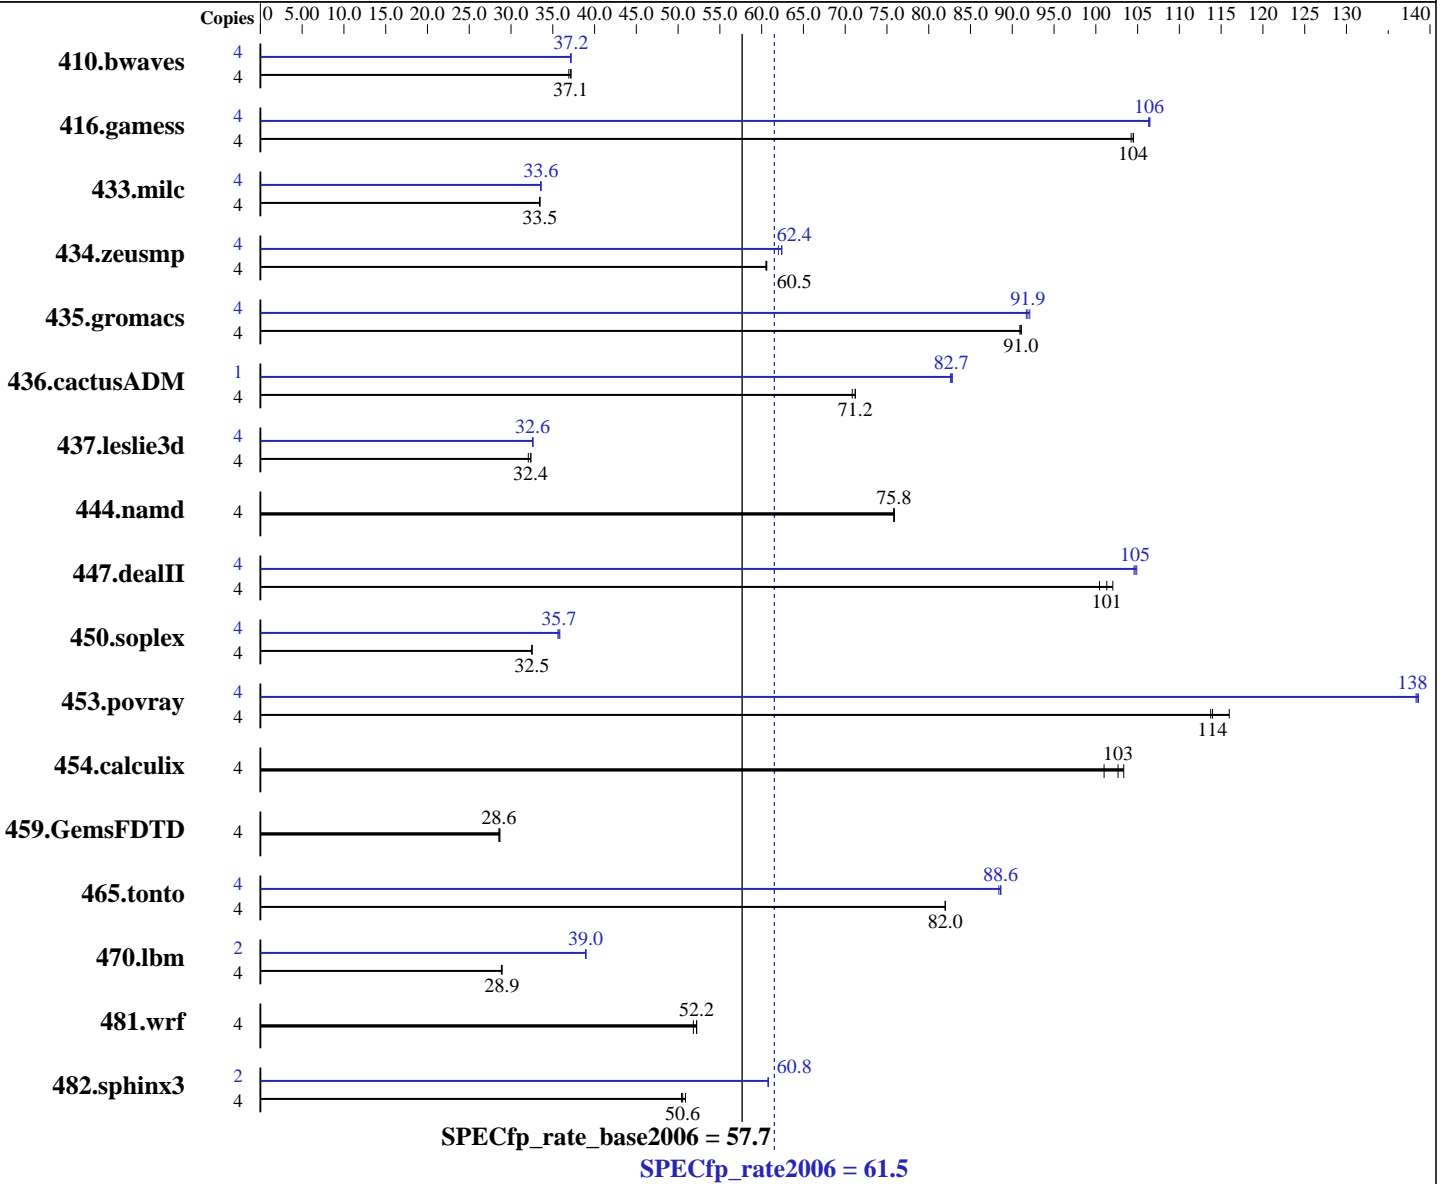

Hardware

CPU Name: Intel Xeon X5270
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3500
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = **61.5**

PRIMERGY RX200 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate_base2006 = **57.7**

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x SATA, 160 GB, 7200 rpm
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1472	36.9	1464	37.1	1462	37.2	4	1464	37.1	1462	37.2	1462	37.2
416.gamess	4	751	104	749	105	750	104	4	736	106	737	106	736	106
433.milc	4	1099	33.4	1097	33.5	1097	33.5	4	1094	33.6	1093	33.6	1093	33.6
434.zeusmp	4	601	60.6	601	60.5	601	60.5	4	587	62.0	583	62.4	583	62.4
435.gromacs	4	314	91.0	314	91.1	314	90.9	4	310	92.1	312	91.7	311	91.9
436.cactusADM	4	671	71.2	675	70.8	671	71.2	1	144	82.8	144	82.7	145	82.6
437.leslie3d	4	1172	32.1	1162	32.4	1161	32.4	4	1153	32.6	1154	32.6	1152	32.6
444.namd	4	423	75.9	423	75.8	423	75.8	4	423	75.9	423	75.8	423	75.8
447.dealII	4	448	102	456	100	452	101	4	436	105	437	105	438	105
450.soplex	4	1026	32.5	1026	32.5	1027	32.5	4	937	35.6	933	35.7	931	35.8
453.povray	4	183	116	187	114	187	114	4	154	138	154	139	154	138
454.calculix	4	319	103	327	101	321	103	4	319	103	327	101	321	103
459.GemsFDTD	4	1480	28.7	1486	28.6	1485	28.6	4	1480	28.7	1486	28.6	1485	28.6
465.tonto	4	480	82.0	480	82.0	480	82.0	4	444	88.6	444	88.6	445	88.4
470.lbm	4	1905	28.8	1901	28.9	1900	28.9	2	706	38.9	705	39.0	706	39.0
481.wrf	4	856	52.2	862	51.8	855	52.2	4	856	52.2	862	51.8	855	52.2
482.sphinx3	4	1532	50.9	1547	50.4	1542	50.6	2	641	60.8	641	60.8	641	60.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

All binaries were built with 64-bit mode except:
437.leslie3d, 450.soplex and 482.sphinx3 in peak
were built with 32-bit mode.

Submit Notes

The config file option 'submit' was used.
taskset has been used to bind processes to cores except
for 436.cactusADM peak



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 61.5

PRIMERGY RX200 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate_base2006 = 57.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores (default)
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Memory Throttling = Enable

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 61.5

PRIMERGY RX200 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate_base2006 = 57.7

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Base Portability Flags (Continued)

470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Benchmarks using both Fortran and C:

icc ifort



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 61.5

PRIMERGY RX200 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate_base2006 = 57.7

CPU2006 license: 22

Test date: Sep-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
         -no-prec-div -static -fno-alias

```

```

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
         -auto-ilp32

```

```

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

```

C++ benchmarks:

```

444.namd: basepeak = yes

```

```

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

```

```

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -opt-malloc-options=3

```

```

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

```

```

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -unroll2 -Ob0 -ansi-alias
           -scalar-rep-

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp_rate2006 = 61.5

PRIMERGY RX200 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate_base2006 = 57.7

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.08.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.08.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:59:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 October 2008.