



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®_rate2006 = 83.4

Supermicro X7DB8+ (Intel Xeon X5470)

SPECfp_rate_base2006 = 76.5

CPU2006 license: 13


Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

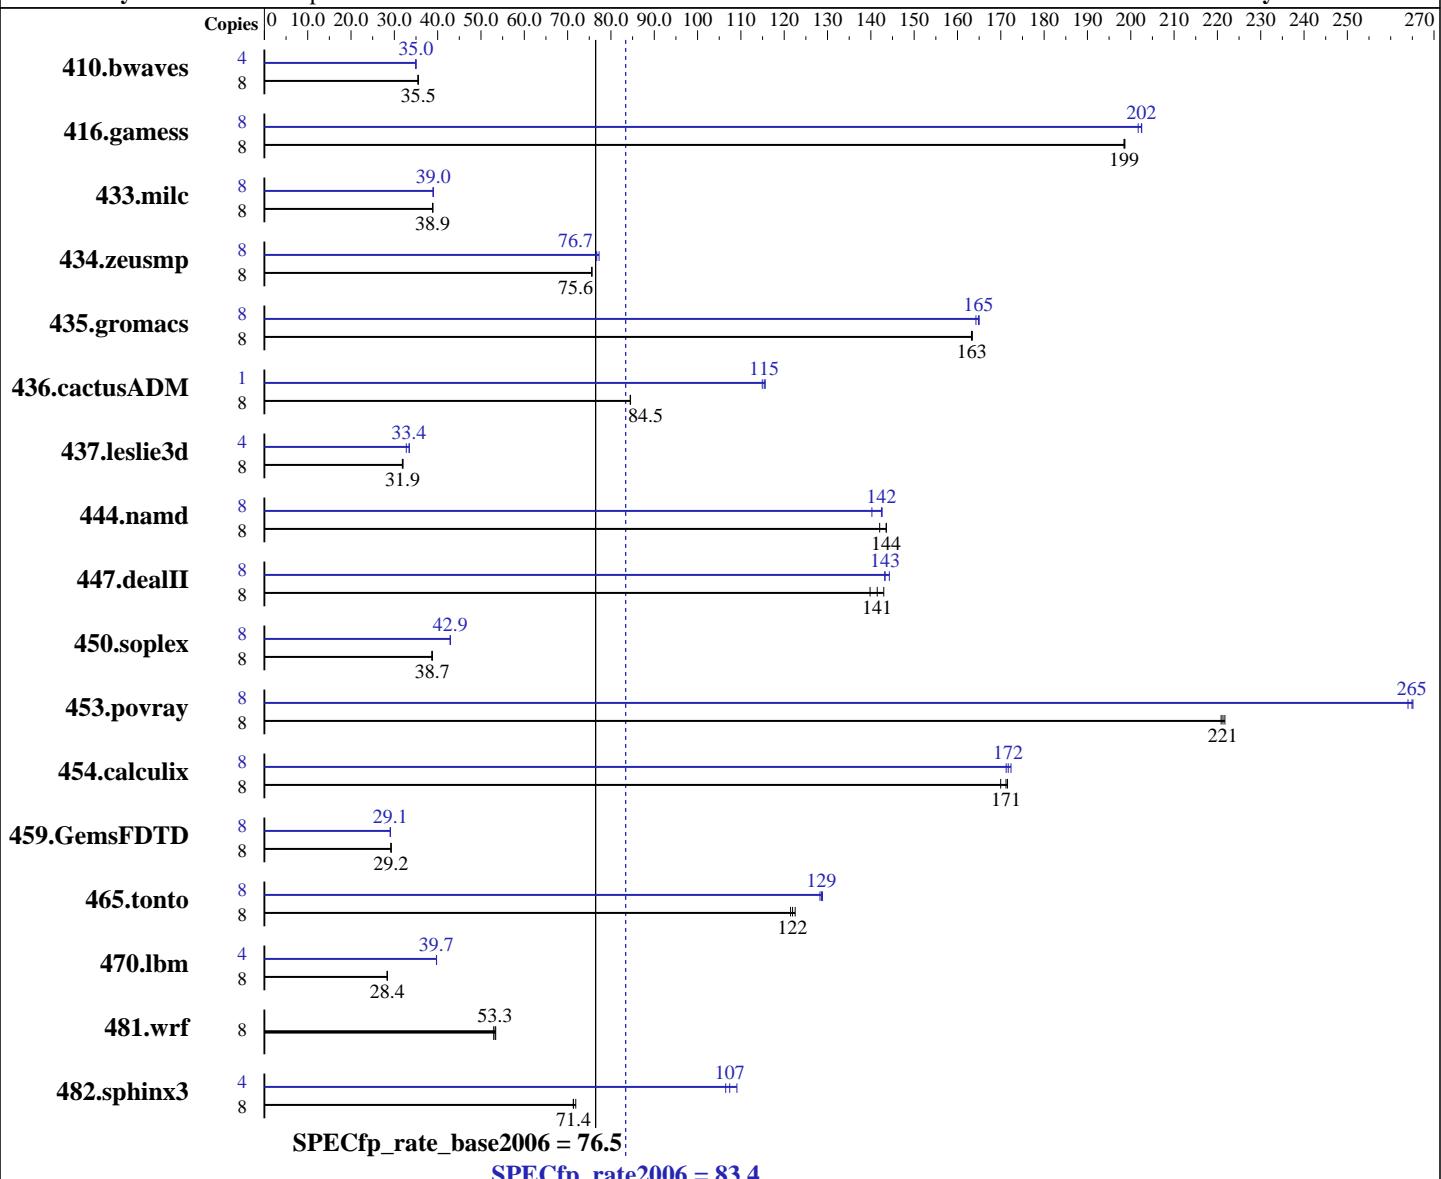

Hardware

CPU Name: Intel Xeon X5470
 CPU Characteristics:
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SuSe Linux SLES10 SP2
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 83.4

Supermicro X7DB8+ (Intel Xeon X5470)

SPECfp_rate_base2006 = 76.5

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x 2GB Samsung 5300F, CL5-5-5, 2 rank, ECC)
 Disk Subsystem: 36.4 GB HP SCSI, 15K RPM
 Other Hardware: None

Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3061	35.5	3058	35.6	3068	35.4	4	1553	35.0	1553	35.0	1557	34.9
416.gamess	8	789	198	789	199	789	199	8	774	202	777	202	773	203
433.milc	8	1890	38.9	1890	38.9	1890	38.9	8	1884	39.0	1884	39.0	1884	39.0
434.zeusmp	8	963	75.6	963	75.6	963	75.6	8	942	77.3	949	76.7	950	76.6
435.gromacs	8	350	163	350	163	350	163	8	346	165	346	165	348	164
436.cactusADM	8	1132	84.5	1131	84.5	1131	84.5	1	104	115	104	115	103	116
437.leslie3d	8	2351	32.0	2354	31.9	2361	31.8	4	1125	33.4	1124	33.5	1148	32.8
444.namd	8	447	144	447	144	452	142	8	450	143	457	140	450	142
447.dealII	8	647	141	655	140	640	143	8	639	143	639	143	634	144
450.soplex	8	1721	38.8	1722	38.7	1725	38.7	8	1555	42.9	1554	42.9	1554	42.9
453.povray	8	193	221	192	221	192	222	8	161	265	161	265	161	264
454.calculix	8	386	171	388	170	385	172	8	383	172	384	172	385	171
459.GemsFDTD	8	2902	29.2	2902	29.2	2904	29.2	8	2917	29.1	2915	29.1	2923	29.0
465.tonto	8	646	122	648	121	642	123	8	614	128	611	129	612	129
470.lbm	8	3874	28.4	3875	28.4	3875	28.4	4	1383	39.7	1383	39.7	1383	39.7
481.wrf	8	1678	53.3	1688	52.9	1673	53.4	8	1678	53.3	1688	52.9	1673	53.4
482.sphinx3	8	2169	71.9	2185	71.4	2187	71.3	4	732	106	715	109	726	107

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex and 482.sphinx3, at peak, are compiled in 32-bit mode
 taskset was used to bind processes to cores except for 436.cactusADM peak
 OMP_NUM_THREADS set to number of processors
 KMP_AFFINITY set to "physical,0"
 KMP_STACKSIZE set to 64M
 Hardware Prefetcher: Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 83.4

Supermicro X7DB8+ (Intel Xeon X5470)

SPECfp_rate_base2006 = 76.5

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 83.4

Supermicro X7DB8+ (Intel Xeon X5470)

SPECfp_rate_base2006 = 76.5

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation Supermicro X7DB8+ (Intel Xeon X5470) CPU2006 license: 13 Test sponsor: Intel Corporation Tested by: Intel Corporation	SPECfp_rate2006 = 83.4 SPECfp_rate_base2006 = 76.5 Test date: Sep-2008 Hardware Availability: Sep-2008 Software Availability: Nov-2008
--	---

Peak Optimization Flags (Continued)

```

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
           -no-prec-div -static -fno-alias

470.lbm: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
          -auto-ilp32

482.sphinx3: -xsse4.1 -ipo -O3 -no-prec-div -static -unroll2

```

C++ benchmarks:

```

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
           -no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
            -no-prec-div -static -unroll2 -ansi-alias -scalar-rep

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
             -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
              -no-prec-div -static -unroll4 -ansi-alias

```

Fortran benchmarks:

```

410.bwaves: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
             -no-prec-div -static -unroll2 -Ob0 -ansi-alias
             -scalar-rep

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
             -no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
               -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
                -no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
              -no-prec-div -static -unroll4 -auto

```

Benchmarks using both Fortran and C:

```

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
              -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
                 -no-prec-div -static -unroll2 -opt-prefetch -parallel
                 -auto-ilp32

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp_rate2006 = 83.4

Supermicro X7DB8+ (Intel Xeon X5470)

SPECfp_rate_base2006 = 76.5

CPU2006 license: 13

Test date: Sep-2008

Test sponsor: Intel Corporation

Hardware Availability: Sep-2008

Tested by: Intel Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.09.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:57:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 October 2008.