



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp[®]_rate2006 = 263

IBM Power 560 Express (3.6 GHz, 16 core)

SPECfp_rate_base2006 = 226

CPU2006 license: 11


Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

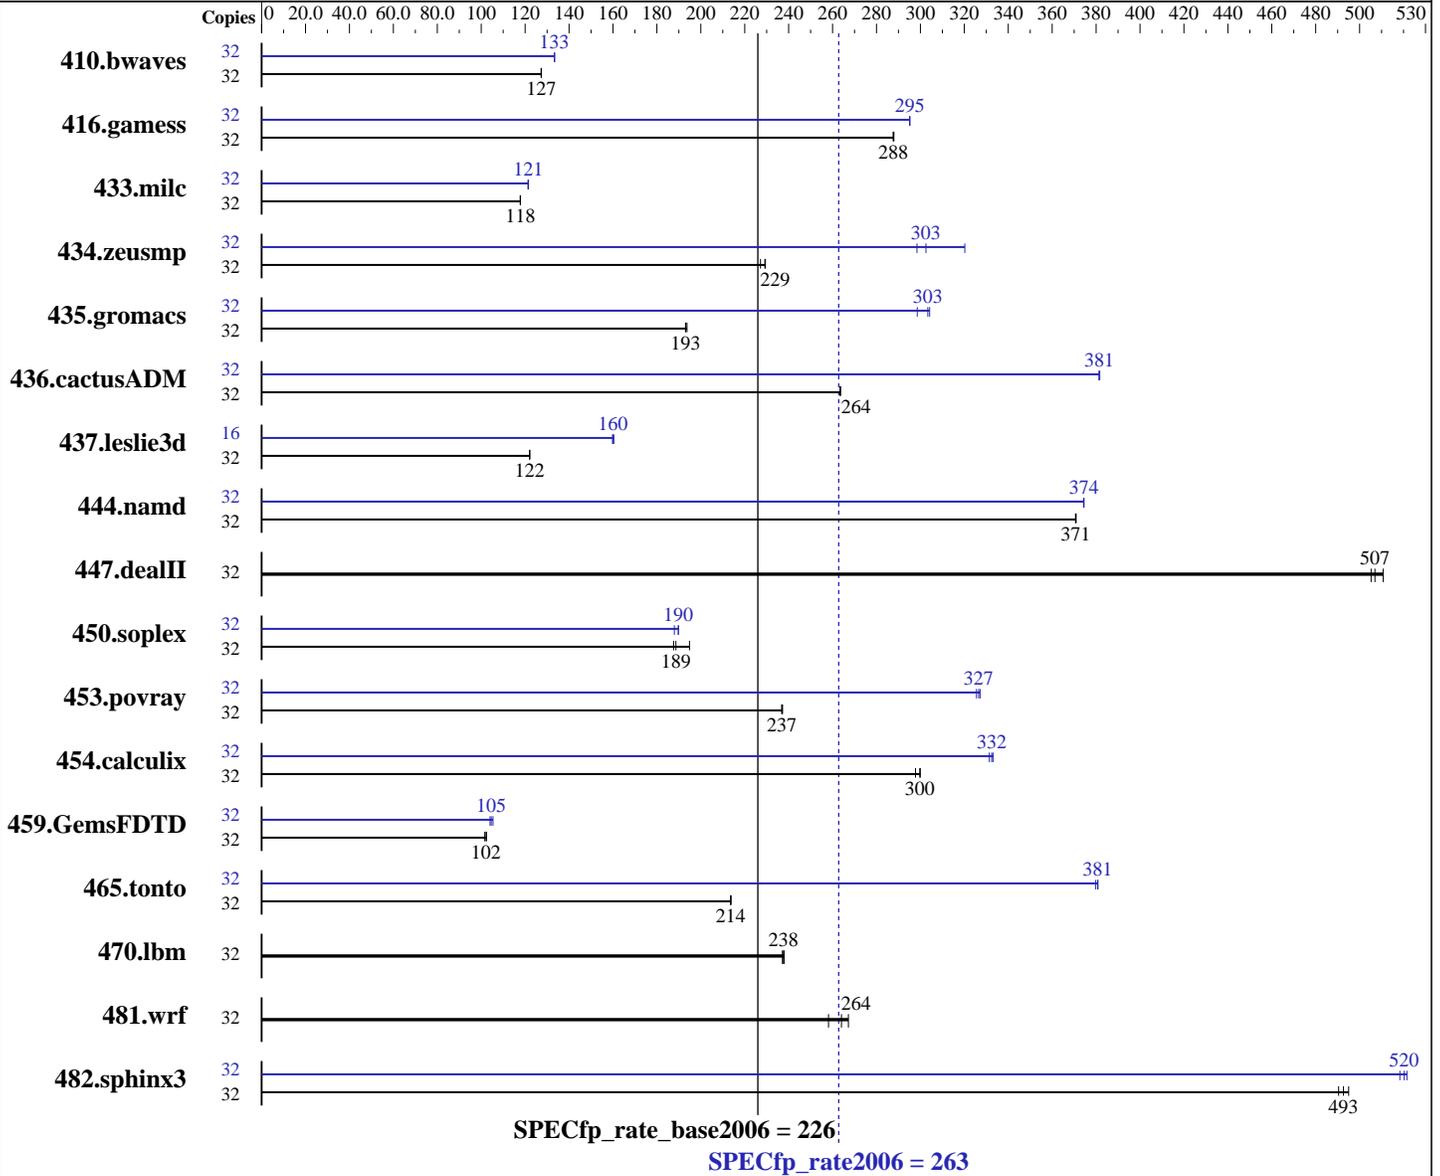

Hardware

CPU Name: POWER6+
 CPU Characteristics: 3600
 CPU MHz: Integrated
 FPU: 16 cores, 8 chips, 2 cores/chip, 2 threads/core
 CPU(s) enabled: 4,8,16 cores
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 4 MB I+D on chip per core
 Secondary Cache:

Continued on next page

Software

Operating System: IBM AIX V6.1
 with the 6100-02 Technology Level
 Compiler: IBM XL C/C++ V10.1 for AIX
 IBM XL Fortran V12.1 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **263**

IBM Power 560 Express (3.6 GHz, 16 core)

SPECfp_rate_base2006 = **226**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

L3 Cache: 32 MB I+D off chip per chip
Other Cache: None
Memory: 64 GB (32x2 GB) DDR2 667 MHz
Disk Subsystem: 4x146 GB SAS 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	3413	127	3414	127	3417	127	32	3259	133	3262	133	3262	133		
416.gamess	32	2176	288	2178	288	2178	288	32	2123	295	2123	295	2123	295		
433.milc	32	2492	118	2494	118	2494	118	32	2418	121	2422	121	2417	122		
434.zeusmp	32	1269	229	1271	229	1282	227	32	963	303	909	320	976	298		
435.gromacs	32	1180	194	1183	193	1184	193	32	753	303	751	304	765	299		
436.cactusADM	32	1452	263	1451	264	1451	264	32	1003	381	1002	382	1003	381		
437.leslie3d	32	2465	122	2465	122	2463	122	16	941	160	938	160	940	160		
444.namd	32	692	371	692	371	692	371	32	685	374	686	374	685	374		
447.dealII	32	717	511	725	505	722	507	32	717	511	725	505	722	507		
450.soplex	32	1370	195	1415	189	1423	188	32	1407	190	1420	188	1406	190		
453.povray	32	719	237	718	237	719	237	32	521	327	523	326	520	327		
454.calculix	32	881	300	880	300	887	298	32	793	333	794	332	797	331		
459.GemsFDTD	32	3316	102	3321	102	3341	102	32	3264	104	3222	105	3247	105		
465.tonto	32	1474	214	1473	214	1474	214	32	827	381	829	380	827	381		
470.lbm	32	1850	238	1848	238	1854	237	32	1850	238	1848	238	1854	237		
481.wrf	32	1385	258	1354	264	1338	267	32	1385	258	1354	264	1338	267		
482.sphinx3	32	1260	495	1272	490	1266	493	32	1199	520	1196	522	1203	518		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for 410.bwaves

with options -bf -bp -ece -lap -las -nop -nopr -pto -RC -RD -rmte -so -tlo -A 64

-lu 6 -rt 0.10 -ihf 60 -sdpla 32 -sdpms 32 -shci 10 -si -siht 15 -lun 32

fdpr binary optimization tool used for 433.milc 435.gromacs 437.leslie3d 453.povray

454.calculix 482.sphinx3

with options -O4 -vrox -pbsi

fdpr binary optimization tool used for 434.zeusmp 450.soplex

with options -O3 -vrox -sdp 9

fdpr binary optimization tool used for 459.GemsFDTD

with options -bf -bp -ece -hr -lap -nop -pca -RC -rmte -si -tb -tlo -vro -A 32 -rt 0.80

-hrf 0.05 -sdp 5 -sdpms 512 -shci 90 -lun 27 -rcctf 0.70 -rccrf 0.80 -rcaf 2



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 263

IBM Power 560 Express (3.6 GHz, 16 core)

SPECfp_rate_base2006 = 226

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
3200 16M large pages defined with vmo command

Platform Notes

System set to "Enhanced" mode when defining partition on HMC.

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinths=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 263

IBM Power 560 Express (3.6 GHz, 16 core)

SPECfp_rate_base2006 = 226

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -grtti=all
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap
-qalias=nostd -blpdata

Benchmarks using both Fortran and C:

-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata

Base Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 263

IBM Power 560 Express (3.6 GHz, 16 core)

SPECfp_rate_base2006 = 226

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
 416.gamess: -qfixed
 434.zeusmp: -qfixed
 435.gromacs: -qfixed -qextname
 436.cactusADM: -qfixed -qextname
 437.leslie3d: -qfixed
 454.calculix: -qfixed -qextname
 481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
 482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -qfdpr -blpdata

470.lbm: basepeak = yes

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage
-D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -blpdata

447.dealIII: basepeak = yes

450.soplex: -O3 -qarch=auto -qtune=auto -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS
-qalign=natural -qfdpr

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 263

IBM Power 560 Express (3.6 GHz, 16 core)

SPECfp_rate_base2006 = 226

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnv1
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnv1
-qxlf90=nosignedzero -qfdpr -blpdata

437.leslie3d: -O5 -qlargepage -qenablevmx -qvecnv1 -qfdpr -blpdata

459.GemsFDTD: -O4 -qlargepage -q64 -qfdpr -blpdata

465.tonto: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-bdatapsize:64K -bstackpsize:64K -btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnv1
-D_ILS_MACROS -qfdpr -qnostrict -blpdata

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 263

IBM Power 560 Express (3.6 GHz, 16 core)

SPECfp_rate_base2006 = 226

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-AIX.html>

<http://www.spec.org/cpu2006/flags/IBM-XL.20090713.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-AIX.xml>

<http://www.spec.org/cpu2006/flags/IBM-XL.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:49:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 October 2008.