



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp®_rate2006 = 121

Sun Blade T6340 Server Module

SPECfp_rate_base2006 = 115

CPU2006 license: 6


Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Oct-2008

Tested by: Sun Microsystems

Software Availability: Oct-2008

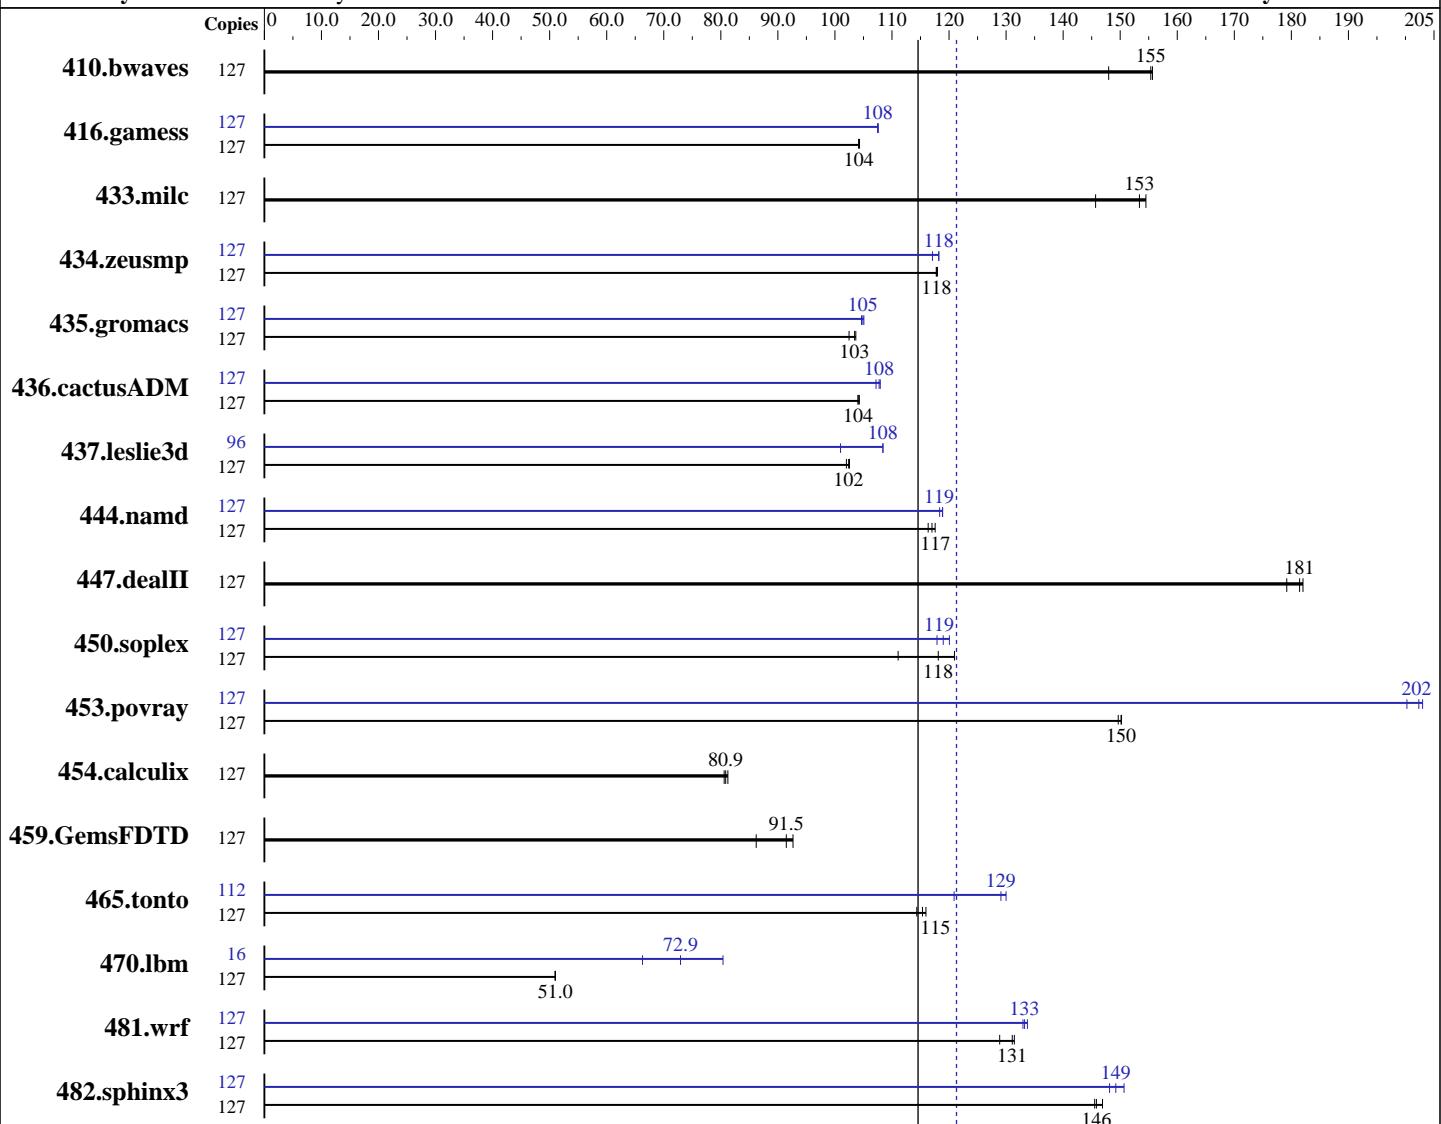

Hardware

CPU Name: UltraSPARC T2 Plus
 CPU Characteristics:
 CPU MHz: 1415
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 8 threads/core
 CPU(s) orderable: 2 chips
 Primary Cache: 16 KB I + 8 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip

Software

Operating System: Solaris 10 10/08
 Compiler: Sun Studio 12 (see additional detail below)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 121

Sun Blade T6340 Server Module

SPECfp_rate_base2006 = 115

CPU2006 license: 6

Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Oct-2008

Tested by: Sun Microsystems

Software Availability: Oct-2008

L3 Cache: None
 Other Cache: None
 Memory: 128 GB (32 x 4 GB)
 Disk Subsystem: Sun Blade 6000 Disk Module
 544 GB (8 x 73 GB 15K RPM SAS disks
 in software RAID 0 with 8 KB stripe)
 Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	127	11663	148	11109	155	11088	156	127	11663	148	11109	155	11088	156
416.gamess	127	23868	104	23838	104	23873	104	127	23122	108	23117	108	23132	107
433.milc	127	7601	153	8002	146	7546	155	127	7601	153	8002	146	7546	155
434.zeusmp	127	9797	118	9814	118	9809	118	127	9870	117	9778	118	9776	118
435.gromacs	127	8747	104	8766	103	8849	102	127	8630	105	8664	105	8645	105
436.cactusADM	127	14553	104	14586	104	14583	104	127	14156	107	14059	108	14085	108
437.leslie3d	127	11641	103	11702	102	11658	102	96	8936	101	8325	108	8323	108
444.namd	127	8755	116	8663	118	8705	117	127	8567	119	8570	119	8606	118
447.dealII	127	7981	182	8108	179	8007	181	127	7981	182	8108	179	8007	181
450.soplex	127	8757	121	8967	118	9535	111	127	8822	120	8902	119	8984	118
453.povray	127	4515	150	4500	150	4497	150	127	3328	203	3339	202	3374	200
454.calculix	127	12959	80.9	12898	81.2	13002	80.6	127	12959	80.9	12898	81.2	13002	80.6
459.GemsFDTD	127	14543	92.7	14730	91.5	15631	86.2	127	14543	92.7	14730	91.5	15631	86.2
465.tonto	127	10834	115	10777	116	10929	114	112	8478	130	8537	129	9116	121
470.lbm	127	34244	51.0	34221	51.0	34213	51.0	16	2735	80.4	3014	72.9	3317	66.3
481.wrf	127	10822	131	10792	131	11007	129	127	10607	134	10669	133	10647	133
482.sphinx3	127	16974	146	17009	146	16850	147	127	16427	151	16587	149	16709	148

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at
http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
 The tested configuration included patch 124867-05,
 124861-06, 124863-04, 127000-04

Submit Notes

The config file option 'submit' was used. Processes were bound to cores using "submit" and "pbind".



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade T6340 Server Module

SPECfp_rate2006 = 121

SPECfp_rate_base2006 = 115

CPU2006 license: 6

Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Oct-2008

Tested by: Sun Microsystems

Software Availability: Oct-2008

Operating System Notes

```
/etc/system parameters
autooup=600
    Causes pages older than the listed number of seconds to
    be written by fsflush.
bufhwm=3000
    Memory byte limit for caching I/O buffers
segmap_percent=1
    Set maximum percent memory for file system cache
tune_t_fsflushr=10
    Controls how many seconds elapse between runs of the
    page flush daemon, fsflush.
tsb_rss_factor=128
    Suggests that the size of the TSB (Translation Storage Buffer)
    may be increased if it is more than 25% (128/512) full. Doing so
    may reduce TSB traps, at the cost of additional kernel memory.
```

The "webconsole" service was turned off using
svcadm disable webconsole

The system had 159 GB of swap space.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

Base Optimization Flags

C benchmarks:

```
-g -fast -xipo=2 -xpagesize=4M -xprefetch_level=2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access
-M /usr/lib/ld/map.bssalign
```

C++ benchmarks:

```
-g0 -library=stlport4 -fast -xipo=2 -xppagesize=4M -xprefetch_level=2
-xdepend -xalias_level=compatible -M /usr/lib/ld/map.bssalign
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade T6340 Server Module

SPECfp_rate2006 = 121

SPECfp_rate_base2006 = 115

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Oct-2008

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-g -fast -xipo=2 -xpagesize=4M -xprefetch_level=2  
-M /usr/lib/ld/map.bssalign
```

Benchmarks using both Fortran and C:

```
-g -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -xprefetch_level=2  
-xalias_level=std -xprefetch_level=3  
-xprefetch_auto_type=indirect_array_access -M /usr/lib/ld/map.bssalign
```

Base Other Flags

C benchmarks:

```
-xjobs=32 -V -#
```

C++ benchmarks:

```
-xjobs=32 -verbose=diags,version
```

Fortran benchmarks:

```
-xjobs=32 -V -v
```

Benchmarks using both Fortran and C:

```
-xjobs=32 -V -# -v
```

Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

Fortran benchmarks:

```
f90
```

Benchmarks using both Fortran and C:

```
cc f90
```

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade T6340 Server Module

SPECfp_rate2006 = 121

SPECfp_rate_base2006 = 115

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

```
470.lbm: -g -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
           -M /usr/lib/ld/map.bssalign -xprefetch_level=3 -xipo=2
           -xrestrict
```

```
482.sphinx3: -g -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
              -M /usr/lib/ld/map.bssalign -xinline= -xprefetch_level=2
              -Wc,-Qlp-ol=1 -xrestrict -xalias_level=strong -fsimple=1
              -xlinkopt=2 -lfast
```

C++ benchmarks:

```
444.namd: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
           -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
           -xdepend -xalias_level=compatible
           -M /usr/lib/ld/map.bssalign -xprefetch_level=1 -xlinkopt=2
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
              -xdepend -xalias_level=compatible
              -M /usr/lib/ld/map.bssalign -xipo=2 -xprefetch_level=2
              -fsimple=0 -xrestrict
              -xprefetch_auto_type=indirect_array_access
              -Qoption cg -Qlp-ol=1 -Qoption cg -Qlp-it=3
              -Qoption cg -Qlp-imb=1 -Qoption iropt -Apf:pdl=3
```

```
453.povray: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpagesize=64K
              -xdepend -xalias_level=compatible -xipo=2 -xrestrict
              -xlinkopt=2
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -g -xprofile=collect:./feedback(pass 1)
              -xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
              -M /usr/lib/ld/map.bssalign -xlinkopt=2
```

```
434.zeusmp: -g -fast -xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=1
              -Qoption cg -Qeps:enabled=1 -Qoption cg -Qeps:ws=8 -lmopt
```

```
437.leslie3d: -g -fast -xpagesize_heap=4M -xpagesize_stack=64K
               -M /usr/lib/ld/map.bssalign -xprefetch_level=3
               -xprefetch_latx:1.6 -Qoption cg -Qlp=1 -Qoption cg -Qlp-fa=0
               -Qoption cg -Qlp-fl=1 -Qoption cg -Qlp-av=448
               -Qoption cg -Qlp-t=4
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade T6340 Server Module

SPECfp_rate2006 = 121

SPECfp_rate_base2006 = 115

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Sep-2008

Hardware Availability: Oct-2008

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

```
465.tonto: -g -fast -xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2  
           -lfast
```

Benchmarks using both Fortran and C:

```
435.gromacs: -g -xprofile=collect:./feedback(pass 1)  
              -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
              -xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=1 -xinline=  
              -xarch=generic -xchip=generic -fsimple=0
```

```
436.cactusADM: -g -xprofile=collect:./feedback(pass 1)  
                 -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
                 -xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2  
                 -fsimple=1 -xlinkopt=2
```

454.calculix: basepeak = yes

```
481.wrf: -g -xprofile=collect:./feedback(pass 1)  
          -xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
          -xpagesize=4M -M /usr/lib/ld/map.bssalign -xlinkopt=2
```

Peak Other Flags

C benchmarks:

```
-xjobs=32 -V -#
```

C++ benchmarks:

```
-xjobs=32 -verbose=diags,version
```

Fortran benchmarks:

```
-xjobs=32 -V -v
```

Benchmarks using both Fortran and C:

```
-xjobs=32 -V -# -v
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.20090713.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 121

Sun Blade T6340 Server Module

SPECfp_rate_base2006 = 115

CPU2006 license: 6

Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Oct-2008

Tested by: Sun Microsystems

Software Availability: Oct-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:11:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 November 2008.