



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon X5270, 3.50 GHz

SPECfp®_rate2006 = 60.5

SPECfp_rate_base2006 = 56.6

CPU2006 license: 22


Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

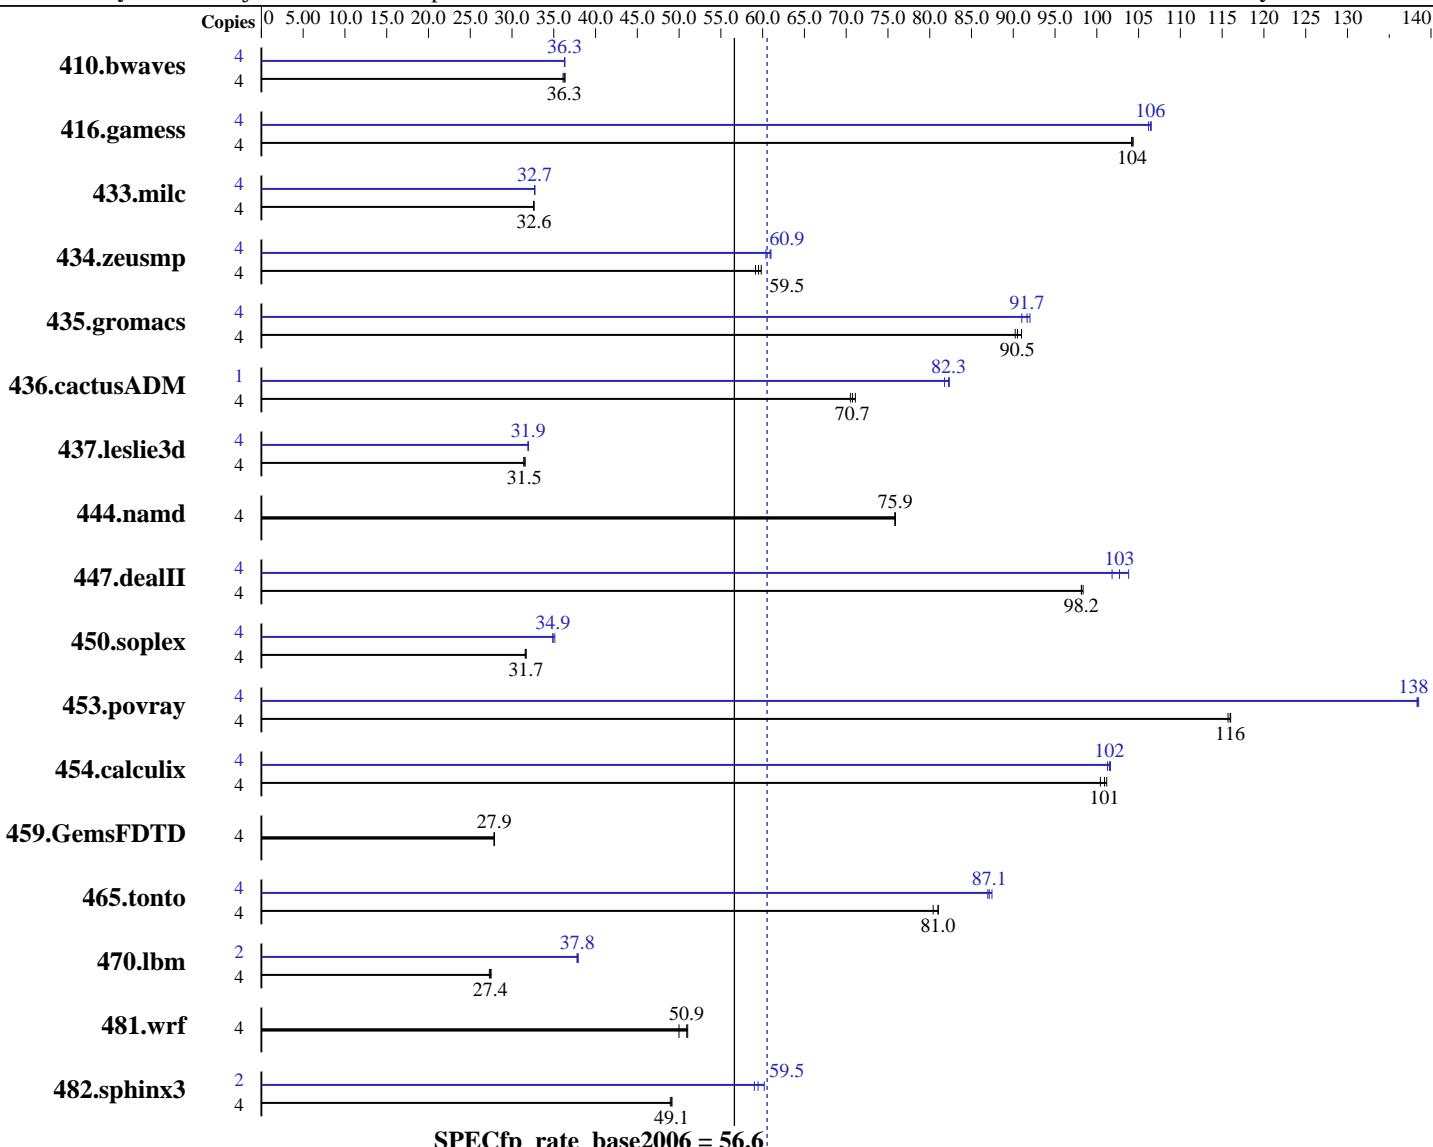

SPECfp_rate_base2006 = 56.6

SPECfp_rate2006 = 60.5

Hardware

CPU Name: Intel Xeon X5270
CPU Characteristics: 1333 MHz system bus
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 6 MB I+D on chip per chip

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.042, l_fproc_b_11.0.042
Auto Parallel: Yes
File System: ext3
System State: Multi-User Run Level 3
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate2006 = 60.5

CPU2006 license: 22

Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x SATA, 120 GB, 5400 rpm
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1505	36.1	1495	36.4	1499	36.3	4	1498	36.3	1497	36.3	1496	36.3
416.gamess	4	751	104	751	104	752	104	4	736	106	735	107	738	106
433.milc	4	1127	32.6	1125	32.6	1126	32.6	4	1123	32.7	1122	32.7	1122	32.7
434.zeusmp	4	615	59.1	608	59.8	612	59.5	4	603	60.4	598	60.9	597	61.0
435.gromacs	4	314	91.0	317	90.2	316	90.5	4	310	92.0	314	91.0	312	91.7
436.cactusADM	4	676	70.7	672	71.1	678	70.5	1	146	81.8	145	82.3	145	82.3
437.leslie3d	4	1197	31.4	1195	31.5	1191	31.6	4	1177	31.9	1178	31.9	1177	32.0
444.namd	4	423	75.8	423	75.9	423	75.9	4	423	75.8	423	75.9	423	75.9
447.dealII	4	465	98.4	466	98.2	466	98.2	4	446	103	449	102	441	104
450.soplex	4	1056	31.6	1053	31.7	1054	31.7	4	956	34.9	956	34.9	950	35.1
453.povray	4	183	116	184	116	184	116	4	154	138	154	138	154	139
454.calculix	4	326	101	327	101	329	100	4	325	102	325	102	326	101
459.GemsFDTD	4	1522	27.9	1523	27.9	1523	27.9	4	1522	27.9	1523	27.9	1523	27.9
465.tonto	4	489	80.4	486	81.0	486	81.0	4	450	87.4	452	87.1	453	86.9
470.lbm	4	2014	27.3	2004	27.4	1999	27.5	2	724	37.9	727	37.8	727	37.8
481.wrf	4	876	51.0	894	50.0	878	50.9	4	876	51.0	894	50.0	878	50.9
482.sphinx3	4	1593	48.9	1587	49.1	1587	49.1	2	661	59.0	648	60.2	656	59.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 taskset has been used to bind processes to cores except
 for 436.cactusADM peak

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
 OMP_NUM_THREADS set to number of cores (default)
 KMP_AFFINITY set to "physical,0"
 KMP_STACKSIZE set to 64M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate2006 = 60.5

CPU2006 license: 22

Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

General Notes

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate2006 = 60.5

CPU2006 license: 22

Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc  
          -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
          -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

C++ benchmarks (except as noted below):

```
icpc
```

```
450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc  
          -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
          -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Fortran benchmarks (except as noted below):

```
ifort
```

```
437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort  
          -L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
          -I/opt/intel/Compiler/11.0/042/ipp/ia32/include
```

Benchmarks using both Fortran and C:

```
icc ifort
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
        433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
        444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate2006 = 60.5

SPECfp_rate_base2006 = 56.6

CPU2006 license: 22

Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY BX620 S4, Intel Xeon X5270, 3.50 GHz

SPECfp_rate2006 = 60.5

SPECfp_rate_base2006 = 56.6

CPU2006 license: 22

Test date: Nov-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Oct-2008

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xsse4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.18.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.18.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:46:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 November 2008.