



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECfp®\_rate2006 = 110

ProLiant DL585 G5  
(2.7 GHz AMD Opteron 8384)

### SPECfp\_rate\_base2006 = 99.7

CPU2006 license: 3


Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

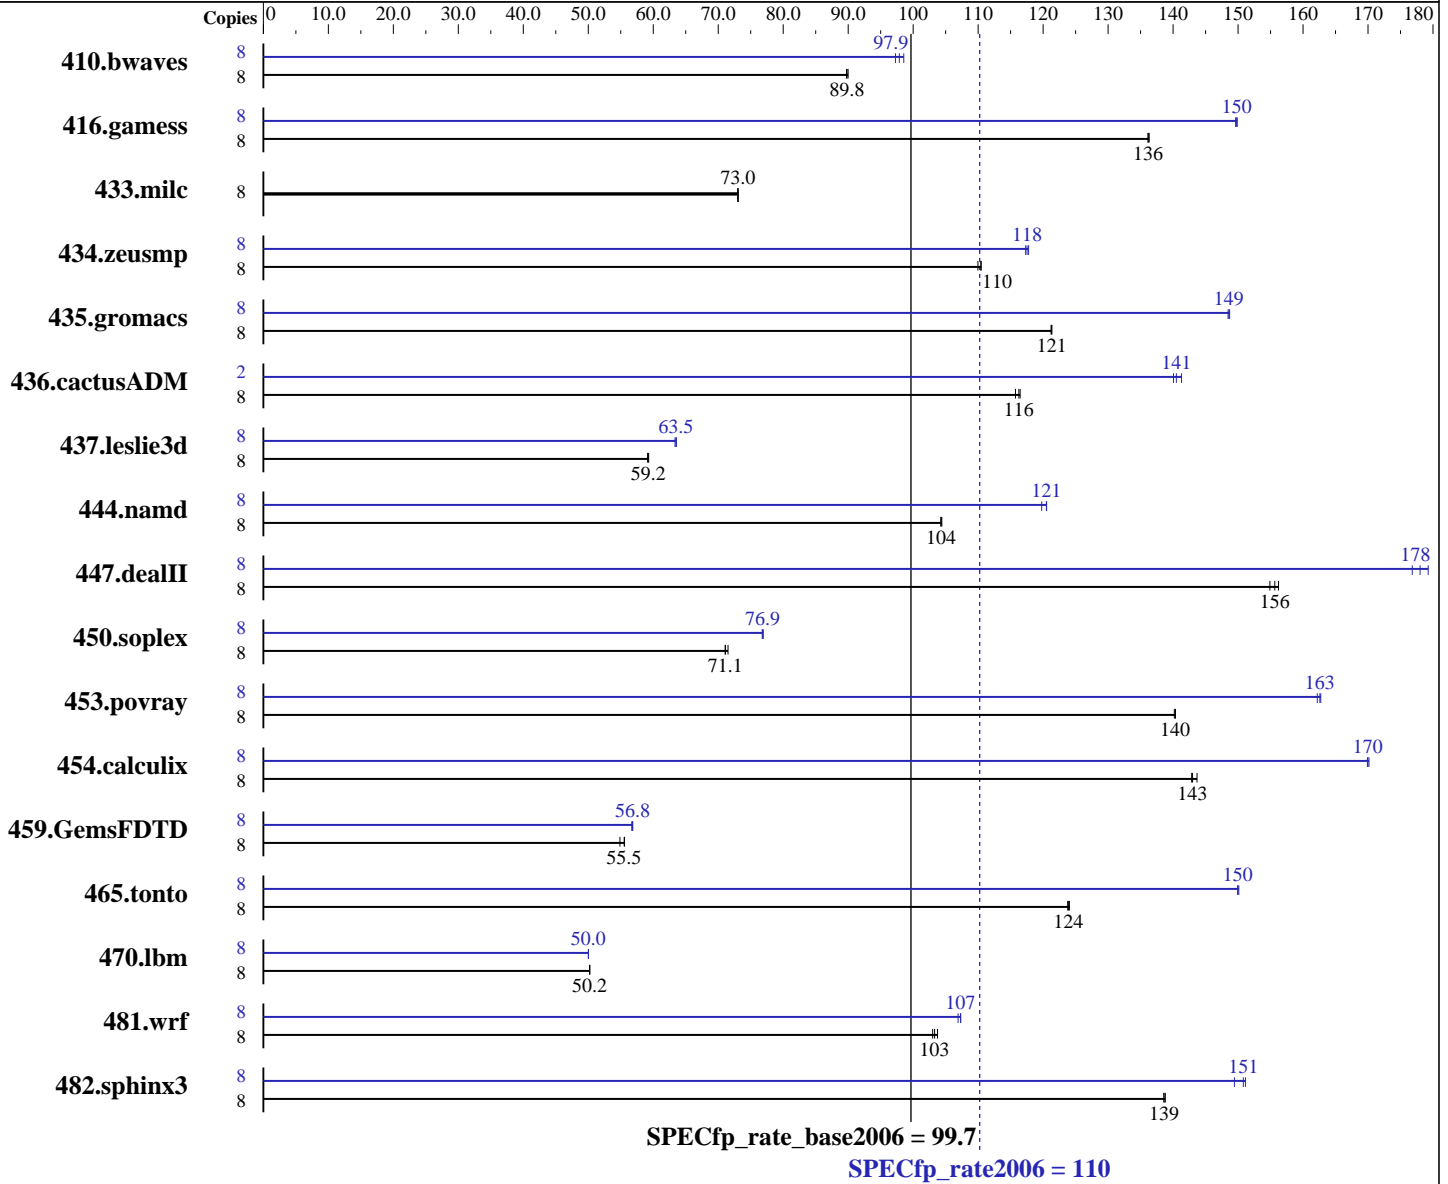

### Hardware

CPU Name: AMD Opteron 8384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.2  
 Advanced Platform, Kernel 2.6.18-92.el5  
 Compiler: PGI Server Complete Version 7.2  
 PathScale Compiler Suite Version 3.2  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 110

ProLiant DL585 G5  
(2.7 GHz AMD Opteron 8384)

SPECfp\_rate\_base2006 = 99.7

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

L3 Cache: 6 MB I+D on chip per chip  
Other Cache: None  
Memory: 32 GB (8x4 GB, PC2-6400P CL5)  
Disk Subsystem: 1x146 GB 15 K SAS  
Other Hardware: None

Other Software: binutils 2.18  
32-bit and 64-bit libhugetlbfs libraries

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1208	90.0	<u>1211</u>	<u>89.8</u>	1211	89.7	8	1103	98.6	<u>1111</u>	<u>97.9</u>	1118	97.3
416.gamess	8	<u>1150</u>	<u>136</u>	1149	136	1151	136	8	<u>1046</u>	<u>150</u>	1047	150	1045	150
433.milc	8	1006	73.0	<u>1006</u>	<u>73.0</u>	1005	73.1	8	1006	73.0	<u>1006</u>	<u>73.0</u>	1005	73.1
434.zeusmp	8	662	110	<u>659</u>	<u>110</u>	659	110	8	621	117	<u>619</u>	<u>118</u>	618	118
435.gromacs	8	471	121	471	121	<u>471</u>	<u>121</u>	8	384	149	<u>384</u>	<u>149</u>	385	148
436.cactusADM	8	826	116	<u>822</u>	<u>116</u>	821	116	2	<u>170</u>	<u>141</u>	171	140	169	141
437.leslie3d	8	1272	59.1	1268	59.3	<u>1270</u>	<u>59.2</u>	8	1187	63.3	<u>1184</u>	<u>63.5</u>	1183	63.6
444.namd	8	<u>615</u>	<u>104</u>	615	104	615	104	8	536	120	<u>532</u>	<u>121</u>	532	121
447.dealII	8	586	156	591	155	<u>588</u>	<u>156</u>	8	511	179	<u>514</u>	<u>178</u>	518	177
450.soplex	8	<u>938</u>	<u>71.1</u>	933	71.5	939	71.1	8	<u>868</u>	<u>76.9</u>	869	76.8	867	76.9
453.povray	8	303	140	304	140	<u>303</u>	<u>140</u>	8	262	162	262	163	<u>262</u>	<u>163</u>
454.calculix	8	459	144	<u>462</u>	<u>143</u>	462	143	8	388	170	388	170	<u>388</u>	<u>170</u>
459.GemsFDTD	8	<u>1529</u>	<u>55.5</u>	1527	55.6	1547	54.9	8	1497	56.7	<u>1494</u>	<u>56.8</u>	1493	56.8
465.tonto	8	<u>635</u>	<u>124</u>	636	124	635	124	8	525	150	<u>525</u>	<u>150</u>	524	150
470.lbm	8	2188	50.2	2190	50.2	<u>2189</u>	<u>50.2</u>	8	2198	50.0	2197	50.0	<u>2197</u>	<u>50.0</u>
481.wrf	8	<u>865</u>	<u>103</u>	861	104	868	103	8	833	107	<u>833</u>	<u>107</u>	836	107
482.sphinx3	8	1123	139	<u>1125</u>	<u>139</u>	1125	139	8	1032	151	<u>1034</u>	<u>151</u>	1043	149

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 7168.  
NCPUS set to number of cores



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 110**

ProLiant DL585 G5  
(2.7 GHz AMD Opteron 8384)

**SPECfp\_rate\_base2006 = 99.7**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2008  
**Hardware Availability:** Nov-2008  
**Software Availability:** Jun-2008

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"  
NCPUS = "4"

## Base Compiler Invocation

C benchmarks:  
pgcc  
  
C++ benchmarks:  
pgcpp  
  
Fortran benchmarks:  
pgf95  
  
Benchmarks using both Fortran and C:  
pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 110**

ProLiant DL585 G5  
(2.7 GHz AMD Opteron 8384)

**SPECfp\_rate\_base2006 = 99.7**

**CPU2006 license:** 3

**Test date:** Oct-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 110**

ProLiant DL585 G5  
(2.7 GHz AMD Opteron 8384)

**SPECfp\_rate\_base2006 = 99.7**

**CPU2006 license:** 3

**Test date:** Oct-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64

436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -Mnomain

459.GemsFDTD: -DSPEC\_CPU\_LP64

465.tonto: -DSPEC\_CPU\_LP64

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge

-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2)

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc  
-tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 110

ProLiant DL585 G5  
(2.7 GHz AMD Opteron 8384)

SPECfp\_rate\_base2006 = 99.7

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

## Peak Optimization Flags (Continued)

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse  
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch  
-Mfprelaxed --zc\_eh -tp barcelona-64 -Bstatic\_pgi

447.deallI: -march=barcelona -Ofast -INLINE:aggressive=on -LNO:opt=0  
-OPT:alias=disjoint -fno-exceptions -m32

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3  
-INLINE:aggressive=on -OPT:IEEE\_arith=3  
-OPT:IEEE\_NaN\_Inf=off -OPT:fold\_unsigned\_relops=on  
-OPT:malloc\_alg=1 -CG:load\_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc  
-Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
-OPT:unroll\_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed  
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge  
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse  
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0  
-Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:prefer\_lru\_reg=off  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
-LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525  
-OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 110**

ProLiant DL585 G5  
(2.7 GHz AMD Opteron 8384)

**SPECfp\_rate\_base2006 = 99.7**

**CPU2006 license:** 3

**Test date:** Oct-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Nov-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jun-2008

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc\_alg=1  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur  
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2)  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge  
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64  
-Bstatic\_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on  
-OPT:malloc\_alg=1 -m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 110**

ProLiant DL585 G5  
(2.7 GHz AMD Opteron 8384)

**SPECfp\_rate\_base2006 = 99.7**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2008  
**Hardware Availability:** Nov-2008  
**Software Availability:** Jun-2008

## Peak Other Flags (Continued)

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)  
[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)  
[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml)  
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:54:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 November 2008.