



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 59.7

ProLiant DL185 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate_base2006 = 53.3

CPU2006 license: 3


Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

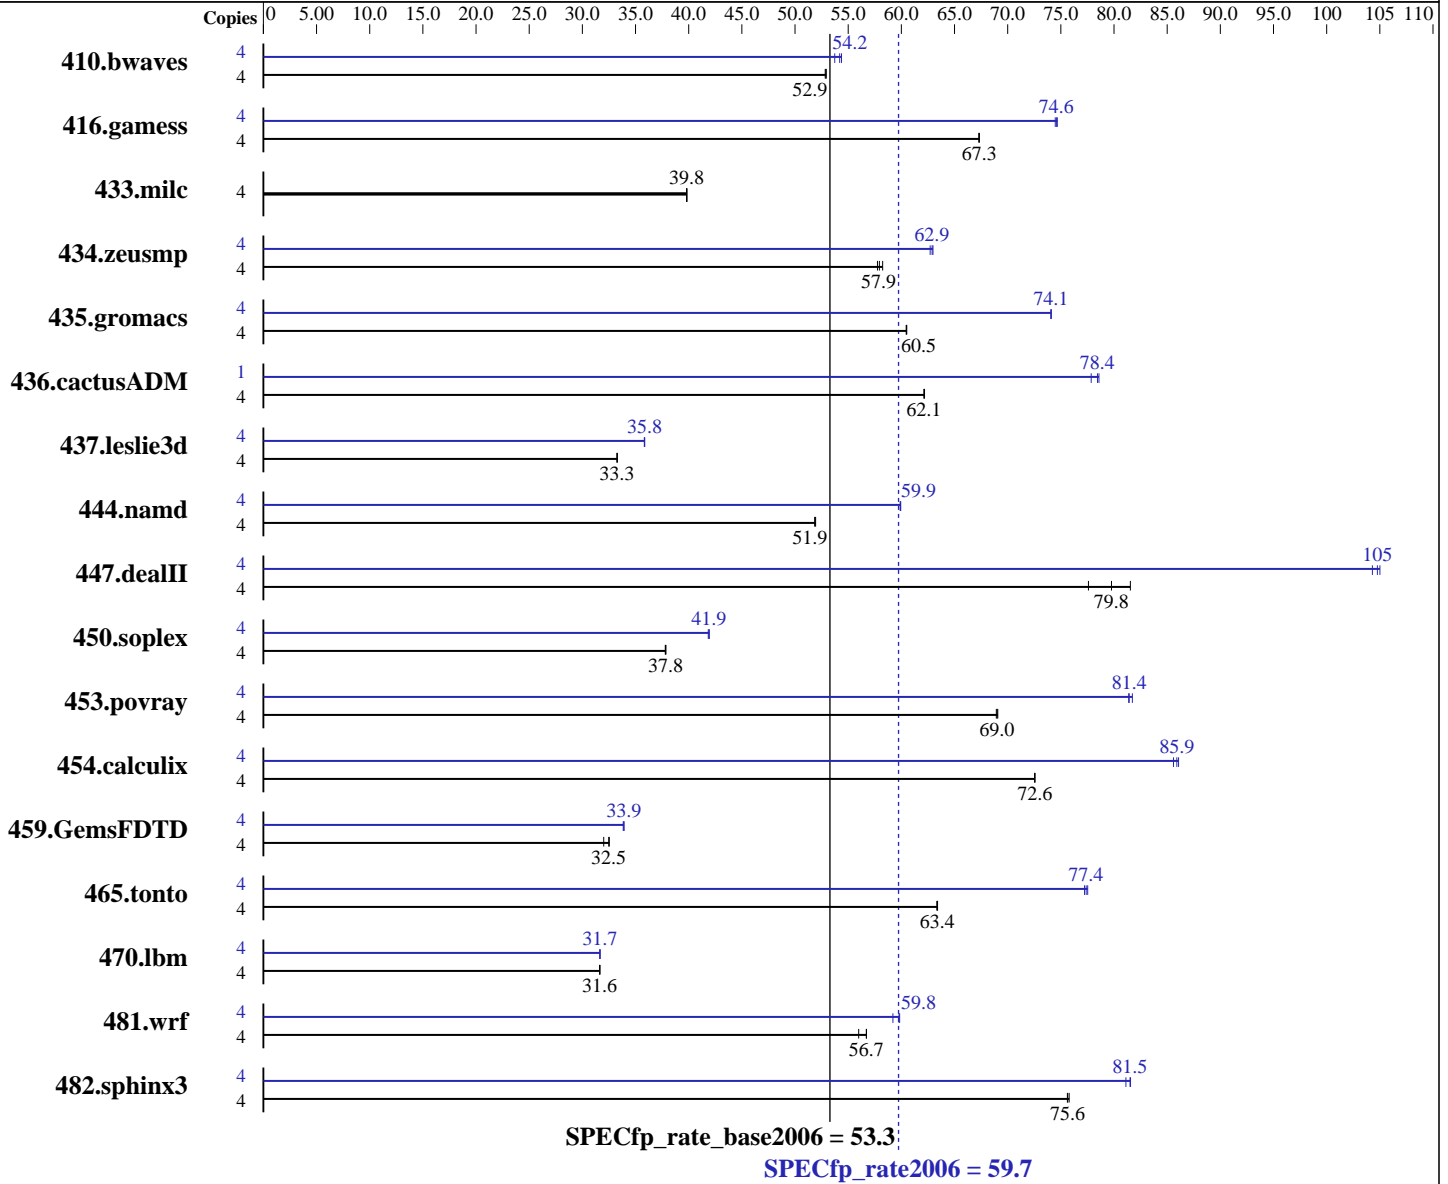

Hardware

CPU Name: AMD Opteron 2384
 CPU Characteristics: 2700
 CPU MHz: Integrated
 FPU: 4 cores, 1 chip, 4 cores/chip
 CPU(s) enabled: 1,2 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache:

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 59.7

ProLiant DL185 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate_base2006 = 53.3

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4x4 GB, PC2-6400P CL5)
Disk Subsystem: 1x146 GB 15 K SAS
Other Hardware: None

Other Software: binutils 2.17.50
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	1029	52.8	1027	52.9	1027	52.9	4	1003	54.2	1000	54.4	1012	53.7
416.gamess	4	1163	67.3	1163	67.3	1164	67.3	4	1050	74.6	1052	74.5	1049	74.7
433.milc	4	923	39.8	922	39.8	922	39.8	4	923	39.8	922	39.8	922	39.8
434.zeusmp	4	630	57.8	628	57.9	625	58.2	4	578	63.0	580	62.7	579	62.9
435.gromacs	4	472	60.5	472	60.5	472	60.5	4	386	74.1	386	74.1	385	74.1
436.cactusADM	4	769	62.2	769	62.1	769	62.1	1	153	77.9	152	78.4	152	78.6
437.leslie3d	4	1130	33.3	1130	33.3	1131	33.3	4	1048	35.9	1050	35.8	1049	35.8
444.namd	4	618	51.9	619	51.9	618	51.9	4	535	59.9	535	59.9	536	59.9
447.dealII	4	574	79.8	561	81.5	590	77.6	4	437	105	439	104	436	105
450.soplex	4	883	37.8	882	37.8	881	37.8	4	797	41.8	796	41.9	796	41.9
453.povray	4	308	69.1	309	68.9	308	69.0	4	260	81.7	261	81.4	261	81.4
454.calculix	4	455	72.5	455	72.6	455	72.6	4	384	85.9	386	85.6	383	86.1
459.GemsFDTD	4	1305	32.5	1326	32.0	1307	32.5	4	1252	33.9	1254	33.8	1252	33.9
465.tonto	4	621	63.3	621	63.4	621	63.4	4	509	77.4	510	77.2	508	77.5
470.lbm	4	1737	31.6	1737	31.6	1738	31.6	4	1736	31.7	1736	31.7	1736	31.7
481.wrf	4	788	56.7	798	56.0	788	56.7	4	747	59.8	755	59.2	747	59.8
482.sphinx3	4	1029	75.8	1031	75.6	1031	75.6	4	956	81.6	961	81.1	956	81.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 3584.
NCPUS set to number of cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 59.7

ProLiant DL185 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate_base2006 = 53.3

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
NCPUS = "4"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 59.7

ProLiant DL185 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate_base2006 = 53.3

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 59.7

ProLiant DL185 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate_base2006 = 53.3

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepch
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 59.7

ProLiant DL185 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate_base2006 = 53.3

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc
-Mprefetch=nta -Mfpelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfpelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfpelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 59.7

ProLiant DL185 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate_base2006 = 53.3

CPU2006 license: 3

Test date: Oct-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL185 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_rate2006 = 59.7

SPECfp_rate_base2006 = 53.3

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html
http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>
http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml
http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:50:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 November 2008.