



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp®\_rate2006 = 25.6

Fujitsu SPARC Enterprise M3000

SPECfp\_rate\_base2006 = 24.4

CPU2006 license: 19


Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Oct-2008

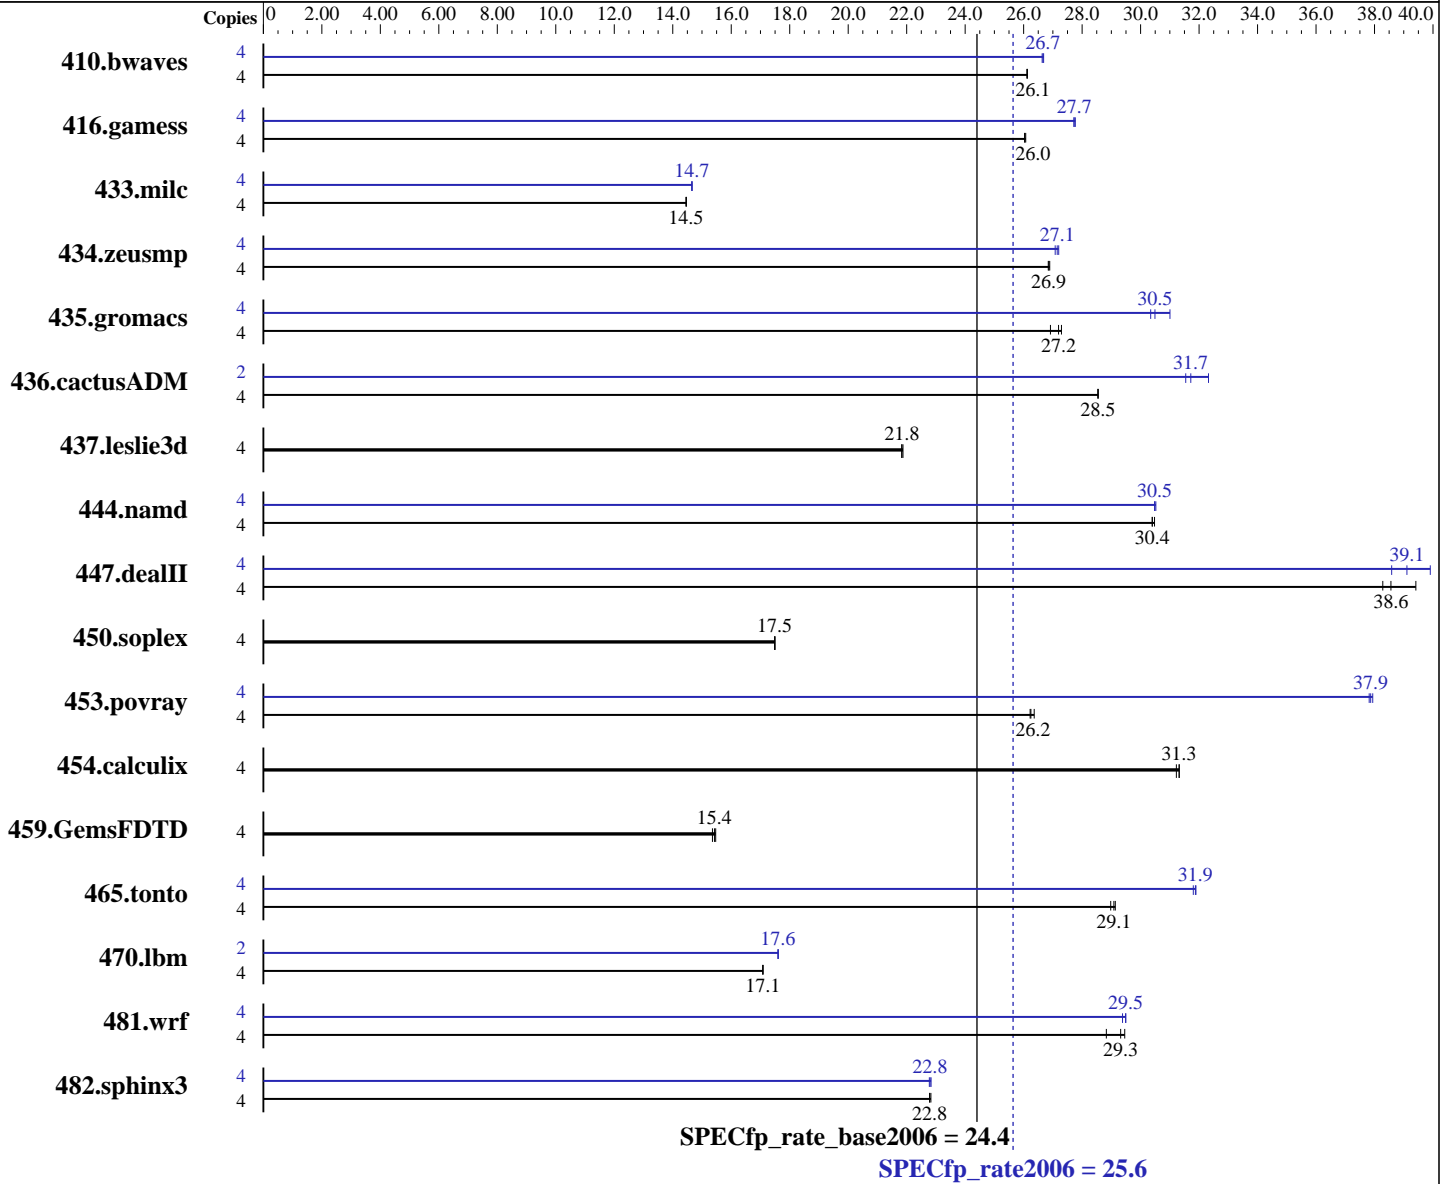

### Hardware

CPU Name: SPARC64 VII  
 CPU Characteristics: 2 Cores  
 CPU MHz: 2520  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 5 MB I+D on chip per chip

Continued on next page

### Software

Operating System: Solaris 10 10/08  
 Compiler: Sun Studio 12 with patches  
 124861-08, 124863-06, 124867-07, 127143-03,  
 127000-05, 127001-01  
 (see patch information below)  
 Auto Parallel: No  
 File System: ufs  
 System State: Default  
 Base Pointers: 32-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 25.6

Fujitsu SPARC Enterprise M3000

SPECfp\_rate\_base2006 = 24.4

CPU2006 license: 19

Test date: Sep-2008

Test sponsor: Fujitsu Limited

Hardware Availability: Nov-2008

Tested by: Fujitsu Limited

Software Availability: Oct-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (2 GB x 8), 2-way interleaved  
Disk Subsystem: 73 GB 10,000 RPM Fujitsu MAY2073RC SAS  
Other Hardware: None

Peak Pointers: 32-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<b>2081</b>	<b>26.1</b>	2081	26.1	2081	26.1	4	2041	26.6	2037	26.7	<b>2039</b>	<b>26.7</b>
416.gamess	4	<b>3008</b>	<b>26.0</b>	3008	26.0	3004	26.1	4	<b>2824</b>	<b>27.7</b>	2821	27.8	2826	27.7
433.milc	4	2540	14.5	2539	14.5	<b>2540</b>	<b>14.5</b>	4	<b>2506</b>	<b>14.7</b>	2504	14.7	2506	14.7
434.zeusmp	4	1354	26.9	<b>1355</b>	<b>26.9</b>	1356	26.8	4	1338	27.2	<b>1341</b>	<b>27.1</b>	1344	27.1
435.gromacs	4	1061	26.9	<b>1050</b>	<b>27.2</b>	1046	27.3	4	921	31.0	941	30.3	<b>937</b>	<b>30.5</b>
436.cactusADM	4	1674	28.5	<b>1675</b>	<b>28.5</b>	1675	28.5	2	758	31.5	<b>754</b>	<b>31.7</b>	739	32.3
437.leslie3d	4	<b>1722</b>	<b>21.8</b>	1719	21.9	1722	21.8	4	<b>1722</b>	<b>21.8</b>	1719	21.9	1722	21.8
444.namd	4	1053	30.5	<b>1055</b>	<b>30.4</b>	1055	30.4	4	1051	30.5	1052	30.5	<b>1052</b>	<b>30.5</b>
447.dealII	4	1195	38.3	1161	39.4	<b>1187</b>	<b>38.6</b>	4	1147	39.9	1186	38.6	<b>1170</b>	<b>39.1</b>
450.soplex	4	<b>1908</b>	<b>17.5</b>	1908	17.5	1907	17.5	4	<b>1908</b>	<b>17.5</b>	1908	17.5	1907	17.5
453.povray	4	812	26.2	807	26.4	<b>811</b>	<b>26.2</b>	4	563	37.8	<b>562</b>	<b>37.9</b>	561	37.9
454.calculix	4	1054	31.3	<b>1054</b>	<b>31.3</b>	1057	31.2	4	1054	31.3	<b>1054</b>	<b>31.3</b>	1057	31.2
459.GemsFDTD	4	2763	15.4	2744	15.5	<b>2751</b>	<b>15.4</b>	4	2763	15.4	2744	15.5	<b>2751</b>	<b>15.4</b>
465.tonto	4	<b>1353</b>	<b>29.1</b>	1351	29.1	1358	29.0	4	<b>1235</b>	<b>31.9</b>	1238	31.8	1234	31.9
470.lbm	4	3218	17.1	3216	17.1	<b>3217</b>	<b>17.1</b>	2	1561	17.6	1561	17.6	<b>1561</b>	<b>17.6</b>
481.wrf	4	1550	28.8	1517	29.5	<b>1524</b>	<b>29.3</b>	4	1521	29.4	<b>1515</b>	<b>29.5</b>	1515	29.5
482.sphinx3	4	<b>3421</b>	<b>22.8</b>	3415	22.8	3421	22.8	4	3423	22.8	<b>3419</b>	<b>22.8</b>	3414	22.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

Sun Studio compiler patches are available at  
[http://developers.sun.com/sunstudio/downloads/patches/ss12\\_patches.jsp](http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp)

## Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 25.6

Fujitsu SPARC Enterprise M3000

SPECfp\_rate\_base2006 = 24.4

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Oct-2008

## Operating System Notes

Shell Environments:  
Default setting.

System Tunables:  
(/etc/system parameters)

```
tune_t_fsflushr=10
Controls how many seconds elapse between runs of the
page flush daemon, fsflush.
autoup=600
Causes pages older than the listed number of seconds to
be written by fsflush.
bufhwm=3000
Memory byte limit for caching I/O buffers.
segmap_percent=1
Set maximum percent memory for file system cache.
```

Other System Settings:

The webconsole service was turned off using svcadm disable webconsole.

## Platform Notes

Memory is 2-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M3000 Server. Note that the Fujitsu SPARC Enterprise M3000 and Sun SPARC Enterprise M3000 are electrically equivalent.

## Base Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

Fortran benchmarks:  
f90

Benchmarks using both Fortran and C:  
cc f90



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 25.6

Fujitsu SPARC Enterprise M3000

SPECfp\_rate\_base2006 = 24.4

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Oct-2008

## Base Optimization Flags

C benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=1  
-xalias\_level=std -xprefetch\_auto\_type=indirect\_array\_access

C++ benchmarks:

-library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch\_level=1 -xalias\_level=compatible

Fortran benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=1

Benchmarks using both Fortran and C:

-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch\_level=1 -xalias\_level=std  
-xprefetch\_auto\_type=indirect\_array\_access

## Base Other Flags

C benchmarks:

-xjobs=4

C++ benchmarks:

-xjobs=4

Fortran benchmarks:

-xjobs=4

Benchmarks using both Fortran and C:

-xjobs=4

## Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 25.6

Fujitsu SPARC Enterprise M3000

SPECfp\_rate\_base2006 = 24.4

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Oct-2008

## Peak Optimization Flags

C benchmarks:

433.milc: -fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=2  
-fsimple=1 -xprefetch\_auto\_type=indirect\_array\_access  
-W2,-Ainline:rs=400 -xalias\_level=std

470.lbm: -fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=3  
-xvector -xarch=generic

482.sphinx3: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
-xpagesize=4M -xinline= -xprefetch=no -xalias\_level=strong  
-lfast -ll2amm

C++ benchmarks:

444.namd: -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M  
-xdepend -xalias\_level=compatible

447.dealIII: -library=stlport4 -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
-xpagesize=4M -xdepend -xalias\_level=compatible -xrestrict  
-xprefetch\_level=2 -xprefetch\_auto\_type=indirect\_array\_access

450.soplex: basepeak = yes

453.povray: -library=stlport4 -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
-xpagesize=4M -xdepend -xalias\_level=compatible

Fortran benchmarks:

410.bwaves: -fast -xipo=2 -xprefetch\_level=2  
-xprefetch\_auto\_type=indirect\_array\_access

416.gamess: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
-xpagesize=4M

434.zeusmp: -fast -fma=fused -xipo=2 -xpagesize=4M -lmopt

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -lfast

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

SPECfp\_rate2006 = 25.6

Fujitsu SPARC Enterprise M3000

SPECfp\_rate\_base2006 = 24.4

CPU2006 license: 19

Test sponsor: Fujitsu Limited

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

435.gromacs: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)  
-fma=fused -xipo=2 -xpagesize=4M -xinline= -xchip=generic  
-fsimple=0

436.cactusADM: -fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch\_level=3 -xalias\_level=std  
-xprefetch\_auto\_type=indirect\_array\_access

454.calculix: basepeak = yes

481.wrf: -fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch\_level=2 -xalias\_level=std -xprefetch\_level=3  
-xprefetch\_auto\_type=indirect\_array\_access

## Peak Other Flags

C benchmarks:

-xjobs=4

C++ benchmarks:

-xjobs=4

Fortran benchmarks:

-xjobs=4

Benchmarks using both Fortran and C:

-xjobs=4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:28:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 December 2008.