



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp®_rate2006 = 74.1

NTT Tytan S6 Series (Intel Xeon E5420)

SPECfp_rate_base2006 = 67.9

CPU2006 license: 9013


Test date: Mar-2009

Test sponsor: NTT System S. A.

Hardware Availability: Jan-2009

Tested by: NTT System S. A.

Software Availability: Nov-2008

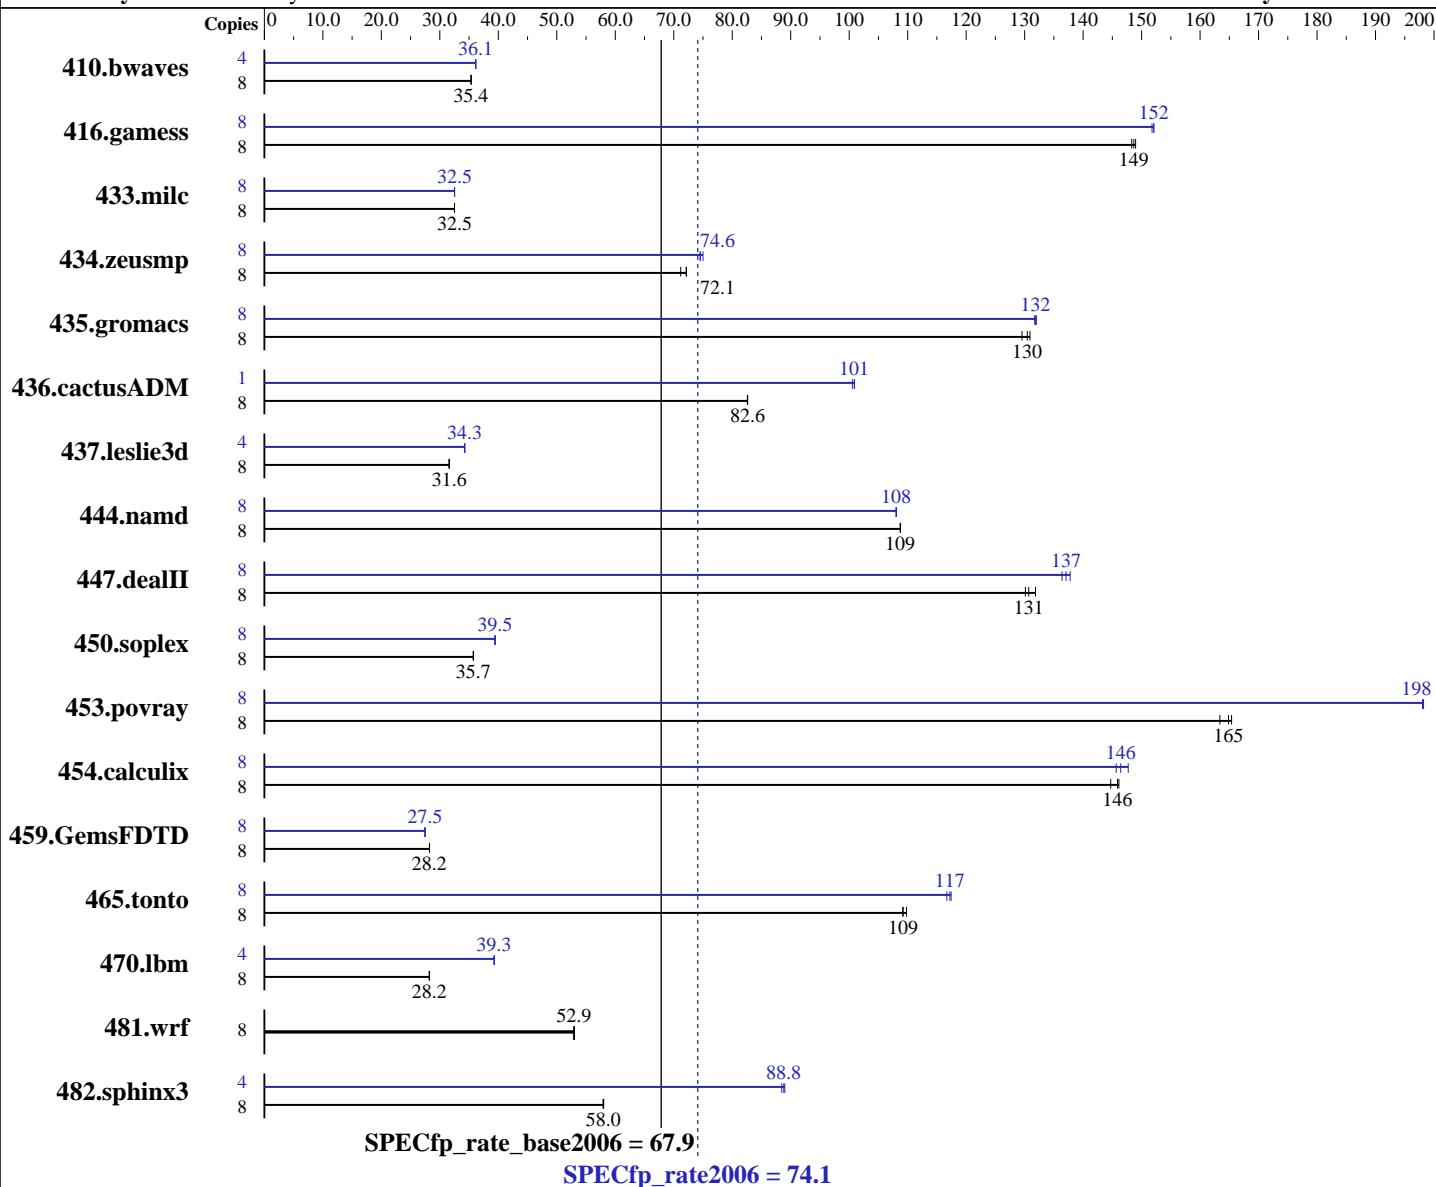

Hardware

CPU Name: Intel Xeon E5420
CPU Characteristics: 2.5 GHz, 2x6 MB p2 shared, 1333 MHz System Bus
CPU MHz: 2500
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SUSE LINUX Enterprise Server 10 SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 74.1

NTT Tytan S6 Series (Intel Xeon E5420)

SPECfp_rate_base2006 = 67.9

CPU2006 license: 9013

Test date: Mar-2009

Test sponsor: NTT System S. A.

Hardware Availability: Jan-2009

Tested by: NTT System S. A.

Software Availability: Nov-2008

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (4 x 4GB DDR2-667 FBDIMM)
 Disk Subsystem: 250 GB SATA, 7200RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3074	35.4	3077	35.3	3075	35.4	4	1505	36.1	1504	36.1	1504	36.1
416.gamess	8	1056	148	1054	149	1051	149	8	1032	152	1030	152	1030	152
433.milc	8	2259	32.5	2259	32.5	2259	32.5	8	2258	32.5	2258	32.5	2259	32.5
434.zeusmp	8	1009	72.2	1009	72.1	1023	71.2	8	976	74.6	977	74.5	971	75.0
435.gromacs	8	438	130	436	131	441	130	8	433	132	433	132	434	132
436.cactusADM	8	1157	82.6	1157	82.6	1158	82.6	1	118	101	119	101	118	101
437.leslie3d	8	2380	31.6	2379	31.6	2378	31.6	4	1099	34.2	1096	34.3	1098	34.3
444.namd	8	590	109	590	109	590	109	8	594	108	594	108	594	108
447.dealII	8	703	130	700	131	694	132	8	664	138	671	136	668	137
450.soplex	8	1868	35.7	1866	35.8	1867	35.7	8	1693	39.4	1690	39.5	1691	39.5
453.povray	8	258	165	257	165	260	163	8	215	198	215	198	215	198
454.calculix	8	456	145	452	146	452	146	8	447	148	453	146	451	146
459.GemsFDTD	8	3007	28.2	3006	28.2	3007	28.2	8	3088	27.5	3092	27.4	3088	27.5
465.tonto	8	717	110	721	109	721	109	8	670	117	675	117	672	117
470.lbm	8	3897	28.2	3896	28.2	3896	28.2	4	1398	39.3	1399	39.3	1399	39.3
481.wrf	8	1685	53.0	1688	52.9	1689	52.9	8	1685	53.0	1688	52.9	1689	52.9
482.sphinx3	8	2689	58.0	2692	57.9	2687	58.0	4	876	89.0	881	88.5	878	88.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 taskset was used to bind processes to cores except for 436.cactusADM peak
 OMP_NUM_THREADS set to number of processors
 KMP_AFFINITY set to "physical,0"
 KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:
 icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 74.1

NTT Tytan S6 Series (Intel Xeon E5420)

SPECfp_rate_base2006 = 67.9

CPU2006 license: 9013

Test date: Mar-2009

Test sponsor: NTT System S. A.

Hardware Availability: Jan-2009

Tested by: NTT System S. A.

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 74.1

NTT Tytan S6 Series (Intel Xeon E5420)

SPECfp_rate_base2006 = 67.9

CPU2006 license: 9013

Test date: Mar-2009

Test sponsor: NTT System S. A.

Hardware Availability: Jan-2009

Tested by: NTT System S. A.

Software Availability: Nov-2008

Peak Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -fno-alias

  470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
           -auto-ilp32

  482.sphinx3: -m32 -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
           -no-prec-div -static -fno-alias -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 74.1

NTT Tytan S6 Series (Intel Xeon E5420)

SPECfp_rate_base2006 = 67.9

CPU2006 license: 9013

Test date: Mar-2009

Test sponsor: NTT System S. A.

Hardware Availability: Jan-2009

Tested by: NTT System S. A.

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep

450.soplex: -m32 -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo
 -O3 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll2 -Ob0 -ansi-alias
 -scalar-rep

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static

437.leslie3d: -m32 -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo
 -O3 -no-prec-div -static -opt-malloc-options=3
 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll2 -opt-prefetch -parallel
 -auto-ilp32

454.calculix: -xsse4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.03.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.03.xml>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp_rate2006 = 74.1

NTT Tytan S6 Series (Intel Xeon E5420)

SPECfp_rate_base2006 = 67.9

CPU2006 license: 9013

Test date: Mar-2009

Test sponsor: NTT System S. A.

Hardware Availability: Jan-2009

Tested by: NTT System S. A.

Software Availability: Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:09:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 10 April 2009.