



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B140a-T  
(Intel Xeon E7310)

SPECfp<sup>®</sup>2006 = 16.0

SPECfp\_base2006 = 15.3

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

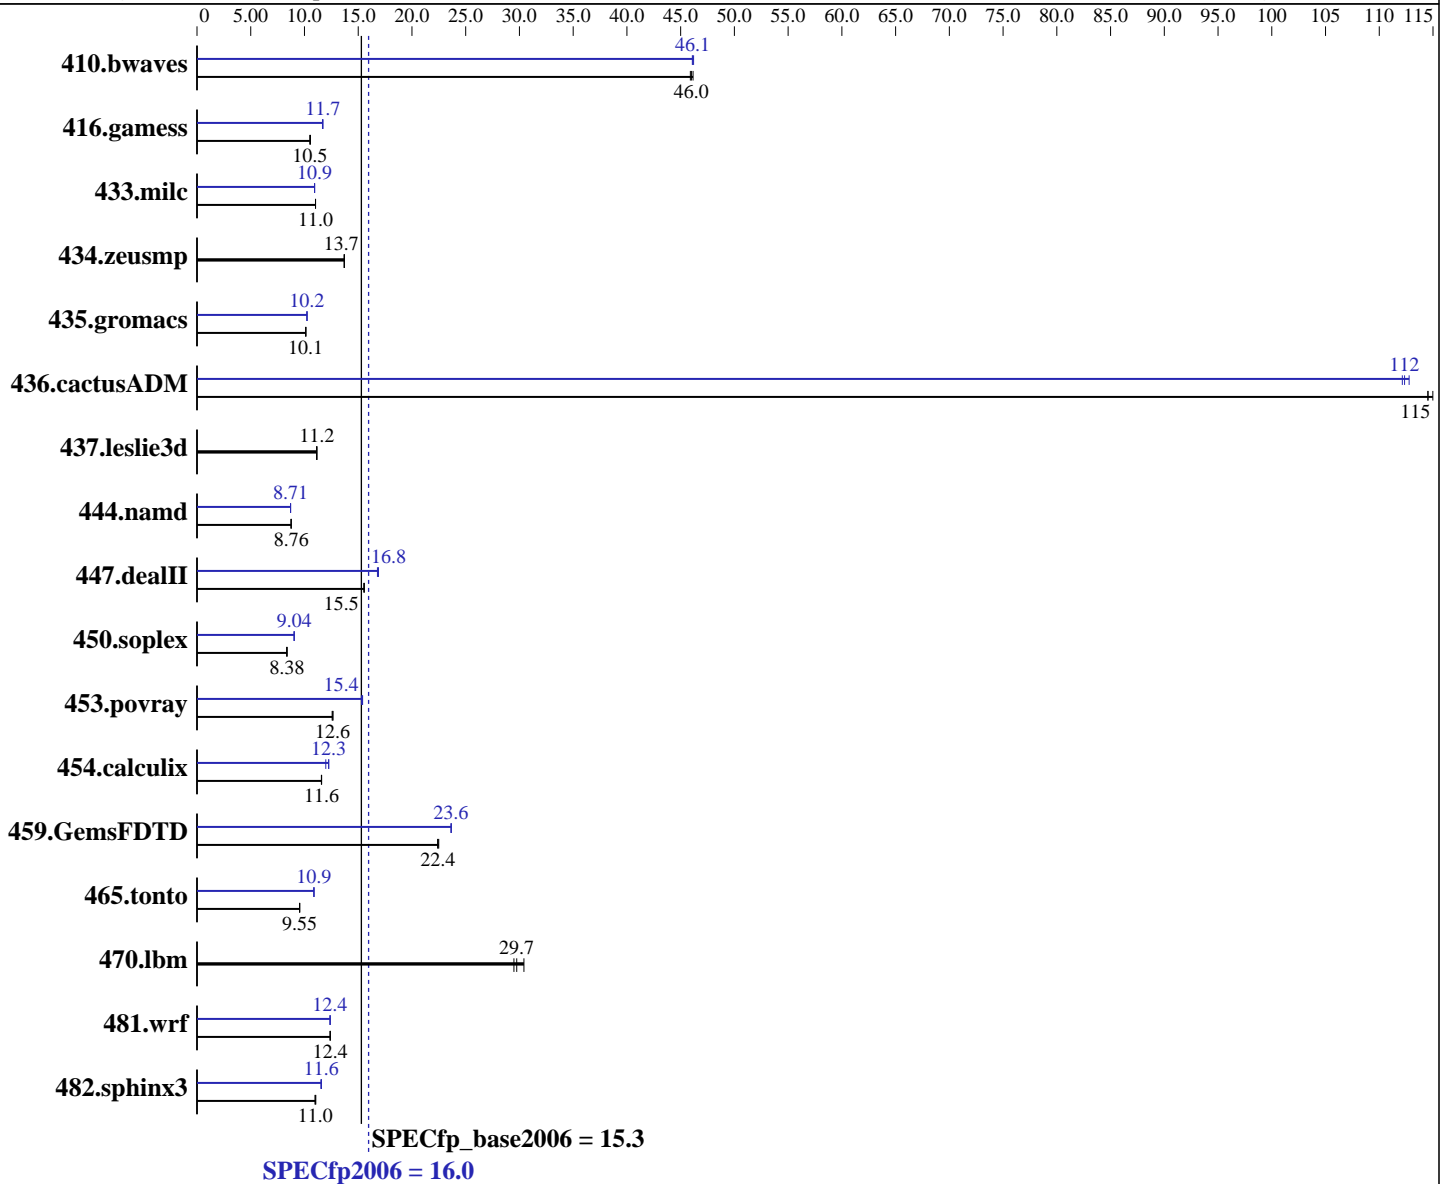

### Hardware

CPU Name: Intel Xeon E7310  
 CPU Characteristics: 1066 MHz system bus  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 1,2,3,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smpp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l\_cproc\_p\_11.0.074, l\_fproc\_p\_11.0.074  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/B140a-T  
(Intel Xeon E7310)

SPECfp2006 = **16.0**

SPECfp\_base2006 = **15.3**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x146.5 GB SAS, 10000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>295</b>	<b>46.0</b>	294	46.2	296	45.9	295	46.1	294	46.2	<b>295</b>	<b>46.1</b>
416.gamess	1854	10.6	<b>1862</b>	<b>10.5</b>	1864	10.5	1677	11.7	1672	11.7	<b>1672</b>	<b>11.7</b>
433.milc	833	11.0	832	11.0	<b>832</b>	<b>11.0</b>	839	10.9	<b>839</b>	<b>10.9</b>	839	10.9
434.zeusmp	664	13.7	665	13.7	<b>664</b>	<b>13.7</b>	664	13.7	665	13.7	<b>664</b>	<b>13.7</b>
435.gromacs	705	10.1	706	10.1	<b>705</b>	<b>10.1</b>	697	10.2	<b>698</b>	<b>10.2</b>	698	10.2
436.cactusADM	104	115	<b>104</b>	<b>115</b>	104	115	107	112	106	113	<b>106</b>	<b>112</b>
437.leslie3d	<b>843</b>	<b>11.2</b>	842	11.2	845	11.1	<b>843</b>	<b>11.2</b>	842	11.2	845	11.1
444.namd	915	8.76	<b>915</b>	<b>8.76</b>	916	8.75	<b>921</b>	<b>8.71</b>	921	8.71	921	8.71
447.dealII	<b>736</b>	<b>15.5</b>	737	15.5	735	15.6	<b>679</b>	<b>16.8</b>	681	16.8	678	16.9
450.soplex	995	8.38	<b>996</b>	<b>8.38</b>	1000	8.34	922	9.04	923	9.04	<b>922</b>	<b>9.04</b>
453.povray	<b>421</b>	<b>12.6</b>	423	12.6	421	12.6	348	15.3	345	15.4	<b>346</b>	<b>15.4</b>
454.calculix	<b>712</b>	<b>11.6</b>	712	11.6	713	11.6	689	12.0	673	12.3	<b>673</b>	<b>12.3</b>
459.GemsFDTD	<b>473</b>	<b>22.4</b>	474	22.4	472	22.5	449	23.7	<b>449</b>	<b>23.6</b>	449	23.6
465.tonto	1029	9.56	1031	9.54	<b>1031</b>	<b>9.55</b>	<b>904</b>	<b>10.9</b>	904	10.9	905	10.9
470.lbm	452	30.4	<b>462</b>	<b>29.7</b>	466	29.5	452	30.4	<b>462</b>	<b>29.7</b>	466	29.5
481.wrf	902	12.4	<b>901</b>	<b>12.4</b>	901	12.4	<b>902</b>	<b>12.4</b>	901	12.4	902	12.4
482.sphinx3	1773	11.0	1763	11.1	<b>1771</b>	<b>11.0</b>	1691	11.5	<b>1684</b>	<b>11.6</b>	1683	11.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 200M

## Platform Notes

Bios settings:  
Hardware Prefetcher: Enabled  
Adjacent Cache Line Prefetch: Enabled  
FSB High Bandwidth Optimization: Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B140a-T  
(Intel Xeon E7310)

**SPECfp2006 = 16.0**

**SPECfp\_base2006 = 15.3**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2009

**Hardware Availability:** Feb-2009

**Software Availability:** Nov-2008

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSSE3 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B140a-T  
(Intel Xeon E7310)

**SPECfp2006 = 16.0**

**SPECfp\_base2006 = 15.3**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2009

**Hardware Availability:** Feb-2009

**Software Availability:** Nov-2008

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/074/bin/ia32/icc  
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/074/bin/ia32/icpc  
-L/opt/intel/Compiler/11.0/074/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/074/ipp/ia32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -fno-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B140a-T  
(Intel Xeon E7310)

**SPECfp2006 = 16.0**

**SPECfp\_base2006 = 15.3**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2009

**Hardware Availability:** Feb-2009

**Software Availability:** Nov-2008

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-  
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -ansi-alias  
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch  
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

454.calculix: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/B140a-T  
(Intel Xeon E7310)

**SPECfp2006 = 16.0**

**SPECfp\_base2006 = 15.3**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Mar-2009

**Hardware Availability:** Feb-2009

**Software Availability:** Nov-2008

## Peak Optimization Flags (Continued)

481.wrf: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:36:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 April 2009.