



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECfp®_rate2006 = 86.4

SPECfp_rate_base2006 = 83.3

CPU2006 license: 9006


Test date: Mar-2009

Test sponsor: NEC Corporation

Hardware Availability: Feb-2009

Tested by: NEC Corporation

Software Availability: Nov-2008

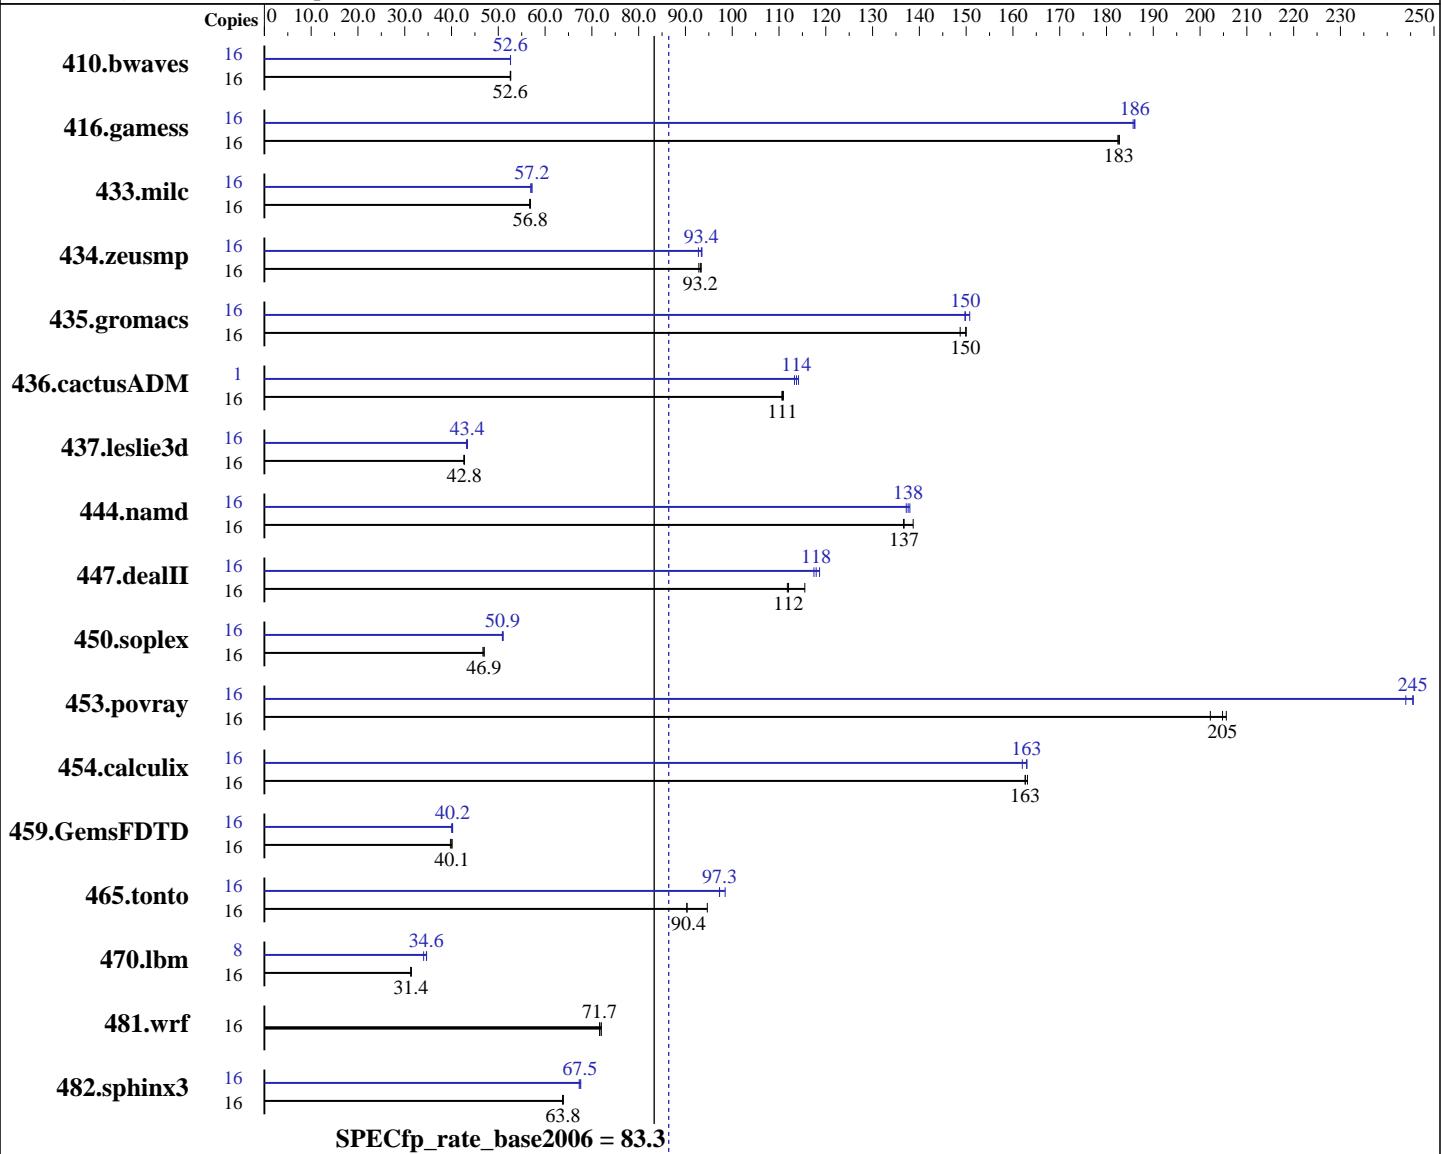

Hardware

CPU Name: Intel Xeon E7310
CPU Characteristics: 1066 MHz system bus
CPU MHz: 1600
FPU: Integrated
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
CPU(s) orderable: 1,2,3,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 4 MB I+D on chip per chip, 2 MB shared / 2 cores

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074, l_cprof_p_11.0.074
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECfp_rate2006 = 86.4

SPECfp_rate_base2006 = 83.3

CPU2006 license: 9006

Test date: Mar-2009

Test sponsor: NEC Corporation

Hardware Availability: Feb-2009

Tested by: NEC Corporation

Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x146.5 GB SAS, 10000 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	4136	52.6	4129	52.7	4135	52.6	16	4132	52.6	4134	52.6	4134	52.6
416.gamess	16	1715	183	1717	182	1714	183	16	1687	186	1684	186	1684	186
433.milc	16	2590	56.7	2584	56.8	2584	56.8	16	2580	56.9	2569	57.2	2569	57.2
434.zeusmp	16	1568	92.9	1562	93.2	1559	93.4	16	1557	93.5	1559	93.4	1569	92.8
435.gromacs	16	762	150	768	149	761	150	16	763	150	758	151	762	150
436.cactusADM	16	1728	111	1723	111	1727	111	1	105	113	105	114	105	114
437.leslie3d	16	3529	42.6	3517	42.8	3516	42.8	16	3480	43.2	3465	43.4	3466	43.4
444.namd	16	938	137	925	139	939	137	16	935	137	930	138	933	138
447.dealII	16	1637	112	1585	116	1634	112	16	1558	117	1552	118	1542	119
450.soplex	16	2857	46.7	2842	46.9	2841	47.0	16	2623	50.9	2614	51.0	2620	50.9
453.povray	16	416	205	421	202	414	206	16	347	246	347	245	349	244
454.calculix	16	812	163	812	163	809	163	16	810	163	810	163	815	162
459.GemsFDTD	16	4269	39.8	4235	40.1	4234	40.1	16	4242	40.0	4219	40.2	4221	40.2
465.tonto	16	1663	94.7	1744	90.3	1742	90.4	16	1599	98.5	1619	97.3	1618	97.3
470.lbm	16	7028	31.3	7010	31.4	7000	31.4	8	3229	34.0	3173	34.6	3171	34.7
481.wrf	16	2494	71.7	2481	72.0	2493	71.7	16	2494	71.7	2481	72.0	2493	71.7
482.sphinx3	16	4880	63.9	4893	63.7	4888	63.8	16	4634	67.3	4622	67.5	4612	67.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 436.cactusADM peak

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECfp_rate2006 = 86.4

SPECfp_rate_base2006 = 83.3

CPU2006 license: 9006

Test date: Mar-2009

Test sponsor: NEC Corporation

Hardware Availability: Feb-2009

Tested by: NEC Corporation

Software Availability: Nov-2008

Platform Notes

Bios settings:

Hardware Prefetcher: Disabled
Adjacent Cache Line Prefetch: Disabled
FSB High Bandwidth Optimization: Enabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECfp_rate2006 = 86.4

SPECfp_rate_base2006 = 83.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
```

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

```
482.sphinx3: /opt/intel/Compiler/11.0/074/bin/ia32/icc
    -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
    -I/opt/intel/Compiler/11.0/074/ipp/ia32/include
```

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/Compiler/11.0/074/bin/ia32/icpc
    -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
    -I/opt/intel/Compiler/11.0/074/ipp/ia32/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/Compiler/11.0/074/bin/ia32/ifort
    -L/opt/intel/Compiler/11.0/074/ipp/ia32/lib
    -I/opt/intel/Compiler/11.0/074/ipp/ia32/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECfp_rate2006 = 86.4

SPECfp_rate_base2006 = 83.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Peak Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll12 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll12 -O0 -ansi-alias
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll12 -O0 -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECfp_rate2006 = 86.4

SPECfp_rate_base2006 = 83.3

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Mar-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revE.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:35:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 April 2009.