



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 208

PowerEdge M610 (Intel Xeon E5530, 2.40 GHz)

SPECint_rate_base2006 = 192

CPU2006 license: 55


Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

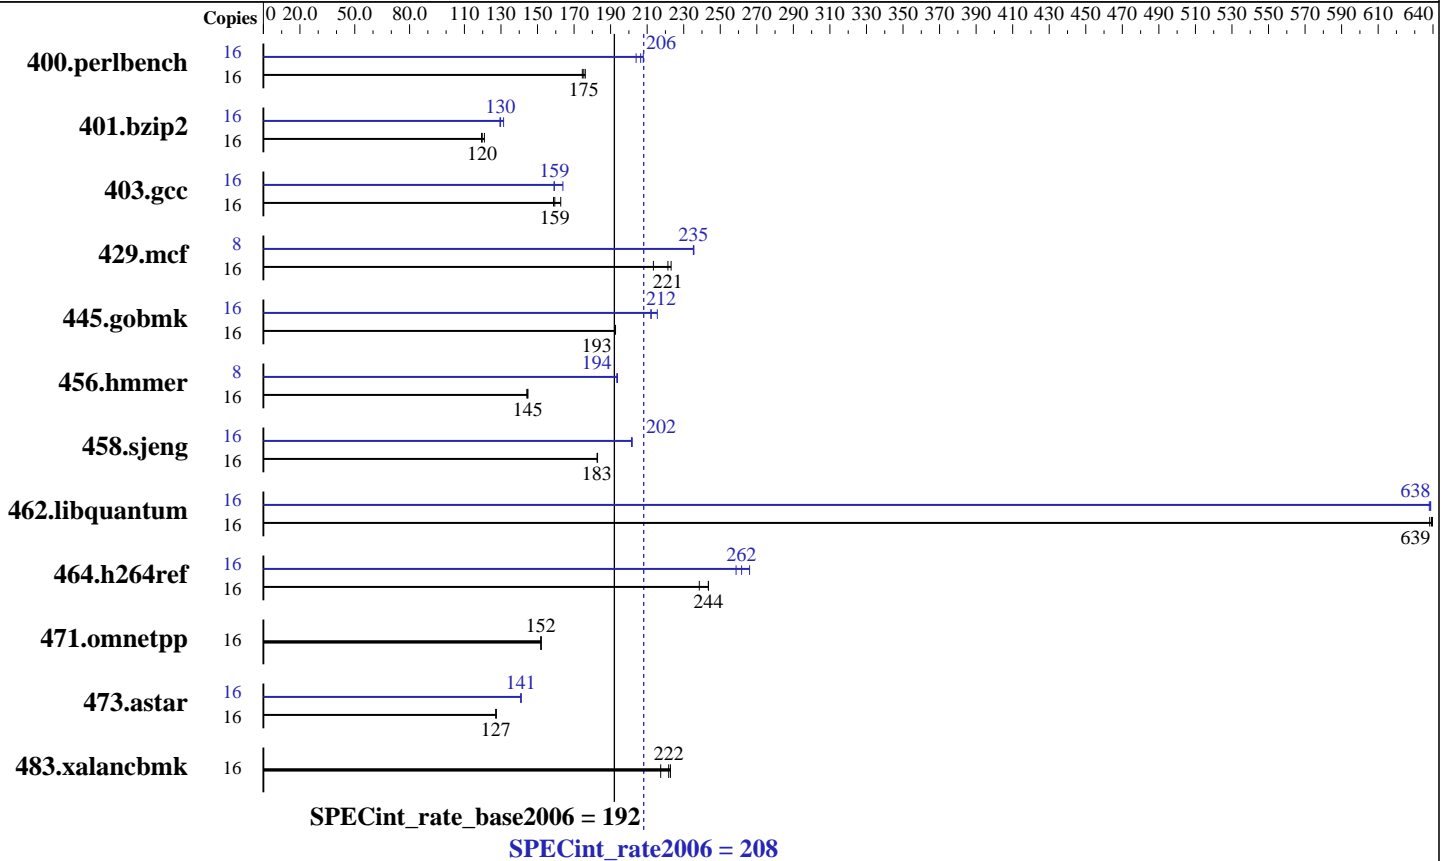

Hardware

CPU Name: Intel Xeon E5530
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB DDR3-1067 DR RDIMM)
 Disk Subsystem: 1 x 146 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 208

PowerEdge M610 (Intel Xeon E5530, 2.40 GHz)

SPECint_rate_base2006 = 192

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	892	175	896	175	887	176	16	766	204	757	206	752	208
401.bzip2	16	1293	119	1289	120	1277	121	16	1175	131	1190	130	1193	129
403.gcc	16	808	159	792	163	811	159	16	809	159	786	164	810	159
429.mcf	16	684	213	659	221	654	223	8	310	235	310	236	310	235
445.gobmk	16	871	193	873	192	872	193	16	791	212	779	216	792	212
456.hammer	16	1032	145	1032	145	1036	144	8	386	194	386	193	385	194
458.sjeng	16	1059	183	1059	183	1060	183	16	961	201	960	202	960	202
462.libquantum	16	519	639	519	638	518	640	16	519	639	519	638	520	638
464.h264ref	16	1454	244	1484	239	1454	244	16	1369	259	1331	266	1353	262
471.omnetpp	16	658	152	658	152	658	152	16	658	152	658	152	658	152
473.astar	16	883	127	883	127	881	127	16	797	141	797	141	797	141
483.xalanbmk	16	508	217	496	223	498	222	16	508	217	496	223	498	222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalanbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -opt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 208

PowerEdge M610 (Intel Xeon E5530, 2.40 GHz)

SPECint_rate_base2006 = 192

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 208

PowerEdge M610 (Intel Xeon E5530, 2.40 GHz)

SPECint_rate_base2006 = 192

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 208

PowerEdge M610 (Intel Xeon E5530, 2.40 GHz)

SPECint_rate_base2006 = 192

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:46:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2009.