



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECint<sup>®</sup>\_rate2006 = 141

ProLiant BL685c G6  
(2.9 GHz AMD Opteron 8389)

### SPECint\_rate\_base2006 = 120

CPU2006 license: 3


Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

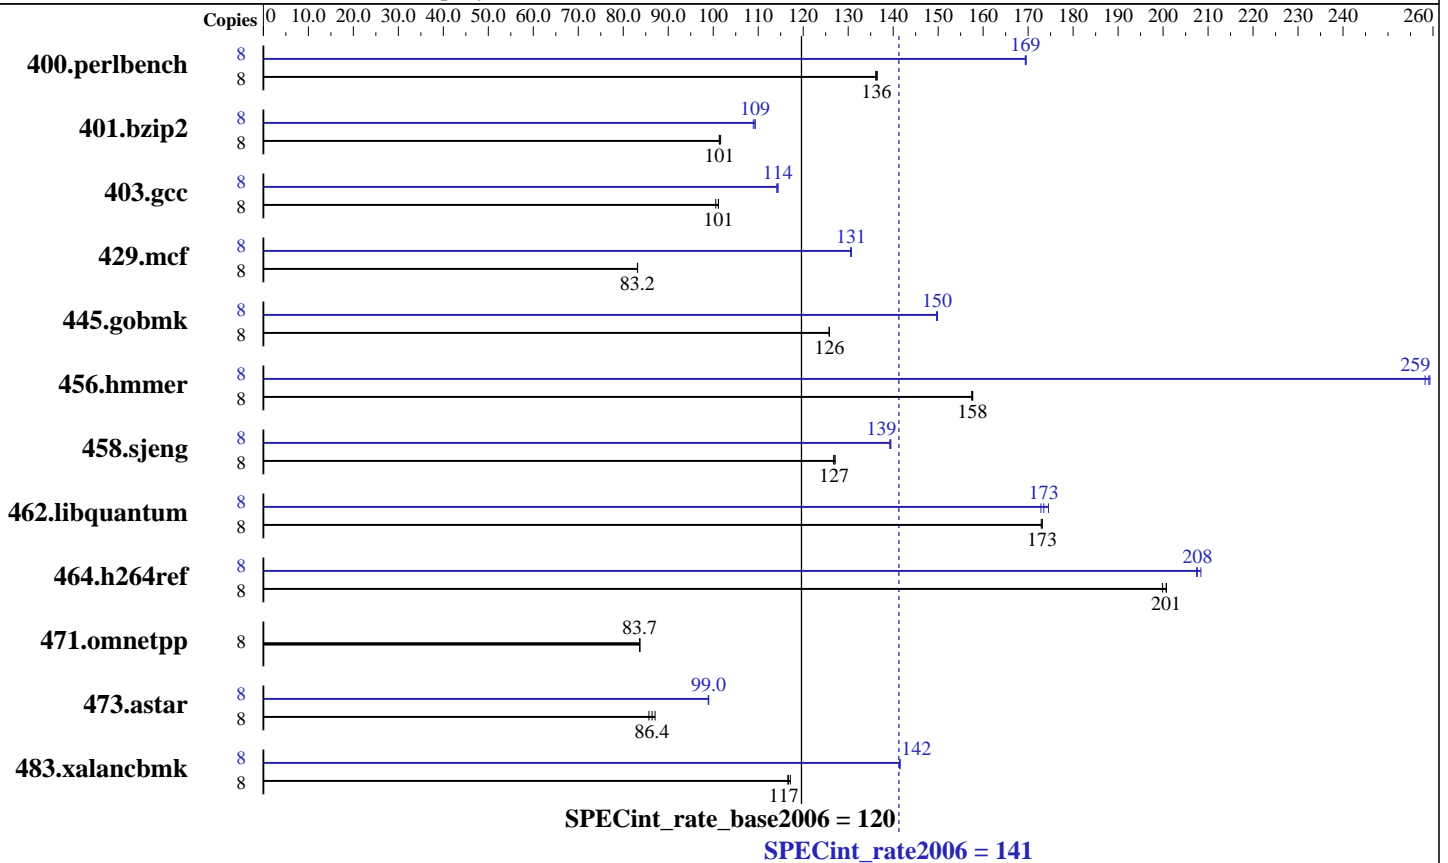

### Hardware

CPU Name: AMD Opteron 8389  
 CPU Characteristics:  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, PC2-6400P CL5)  
 Disk Subsystem: 1x72 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 32-bit and 64-bit libhugetlbfs libraries  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 141

ProLiant BL685c G6  
(2.9 GHz AMD Opteron 8389)

SPECint\_rate\_base2006 = 120

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	573	136	<u>573</u>	<u>136</u>	574	136	8	<u>461</u>	<u>169</u>	461	170	461	169
401.bzip2	8	759	102	762	101	<u>761</u>	<u>101</u>	8	<u>706</u>	<u>109</u>	706	109	709	109
403.gcc	8	640	101	<u>637</u>	<u>101</u>	637	101	8	563	114	<u>563</u>	<u>114</u>	564	114
429.mcf	8	877	83.1	<u>877</u>	<u>83.2</u>	877	83.2	8	<u>558</u>	<u>131</u>	558	131	559	131
445.gobmk	8	667	126	667	126	<u>667</u>	<u>126</u>	8	<u>560</u>	<u>150</u>	561	150	560	150
456.hammer	8	<u>473</u>	<u>158</u>	473	158	474	157	8	<u>288</u>	<u>259</u>	289	258	288	259
458.sjeng	8	<u>763</u>	<u>127</u>	764	127	762	127	8	695	139	<u>694</u>	<u>139</u>	694	139
462.libquantum	8	<u>957</u>	<u>173</u>	957	173	959	173	8	950	175	959	173	<u>956</u>	<u>173</u>
464.h264ref	8	882	201	886	200	<u>882</u>	<u>201</u>	8	853	207	<u>853</u>	<u>208</u>	849	208
471.omnetpp	8	<u>598</u>	<u>83.7</u>	597	83.7	598	83.6	8	<u>598</u>	<u>83.7</u>	597	83.7	598	83.6
473.astar	8	<u>650</u>	<u>86.4</u>	655	85.7	645	87.1	8	568	98.9	<u>567</u>	<u>99.0</u>	567	99.0
483.xalancbmk	8	<u>473</u>	<u>117</u>	473	117	471	117	8	<u>390</u>	<u>142</u>	390	142	390	141

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 7168.  
NCPUS set to number of cores

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 141**

ProLiant BL685c G6  
(2.9 GHz AMD Opteron 8389)

**SPECint\_rate\_base2006 = 120**

**CPU2006 license:** 3

**Test date:** Mar-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2009

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:6 -tp barcelona-32 -Bstatic_pgi

```

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 141

ProLiant BL685c G6  
(2.9 GHz AMD Opteron 8389)

SPECint\_rate\_base2006 = 120

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
-IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
-CG:local\_sched\_alg=1  
401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
-OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
-m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs  
403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
-LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
-CG:prefer\_lru\_reg=off -m32  
429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
-CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
-L/usr/lib -lhugetlbfs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 141

ProLiant BL685c G6  
(2.9 GHz AMD Opteron 8389)

SPECint\_rate\_base2006 = 120

CPU2006 license: 3

Test date: Mar-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
-LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial  
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
-LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
-LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8  
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed  
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
-Bstatic\_pgi

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse  
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed  
--zc\_eh -tp barcelona-32 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-L/cpu2006/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 141**

ProLiant BL685c G6  
(2.9 GHz AMD Opteron 8389)

**SPECint\_rate\_base2006 = 120**

**CPU2006 license:** 3

**Test date:** Mar-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2009

## Peak Other Flags (Continued)

456.hmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.00.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.html)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.00.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.xml)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:57:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 April 2009.