



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp[®]_rate2006 = 193

Servidor Itautec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 180

CPU2006 license: 9001


Test sponsor: Itautec

Tested by: Itautec

Test date: Apr-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

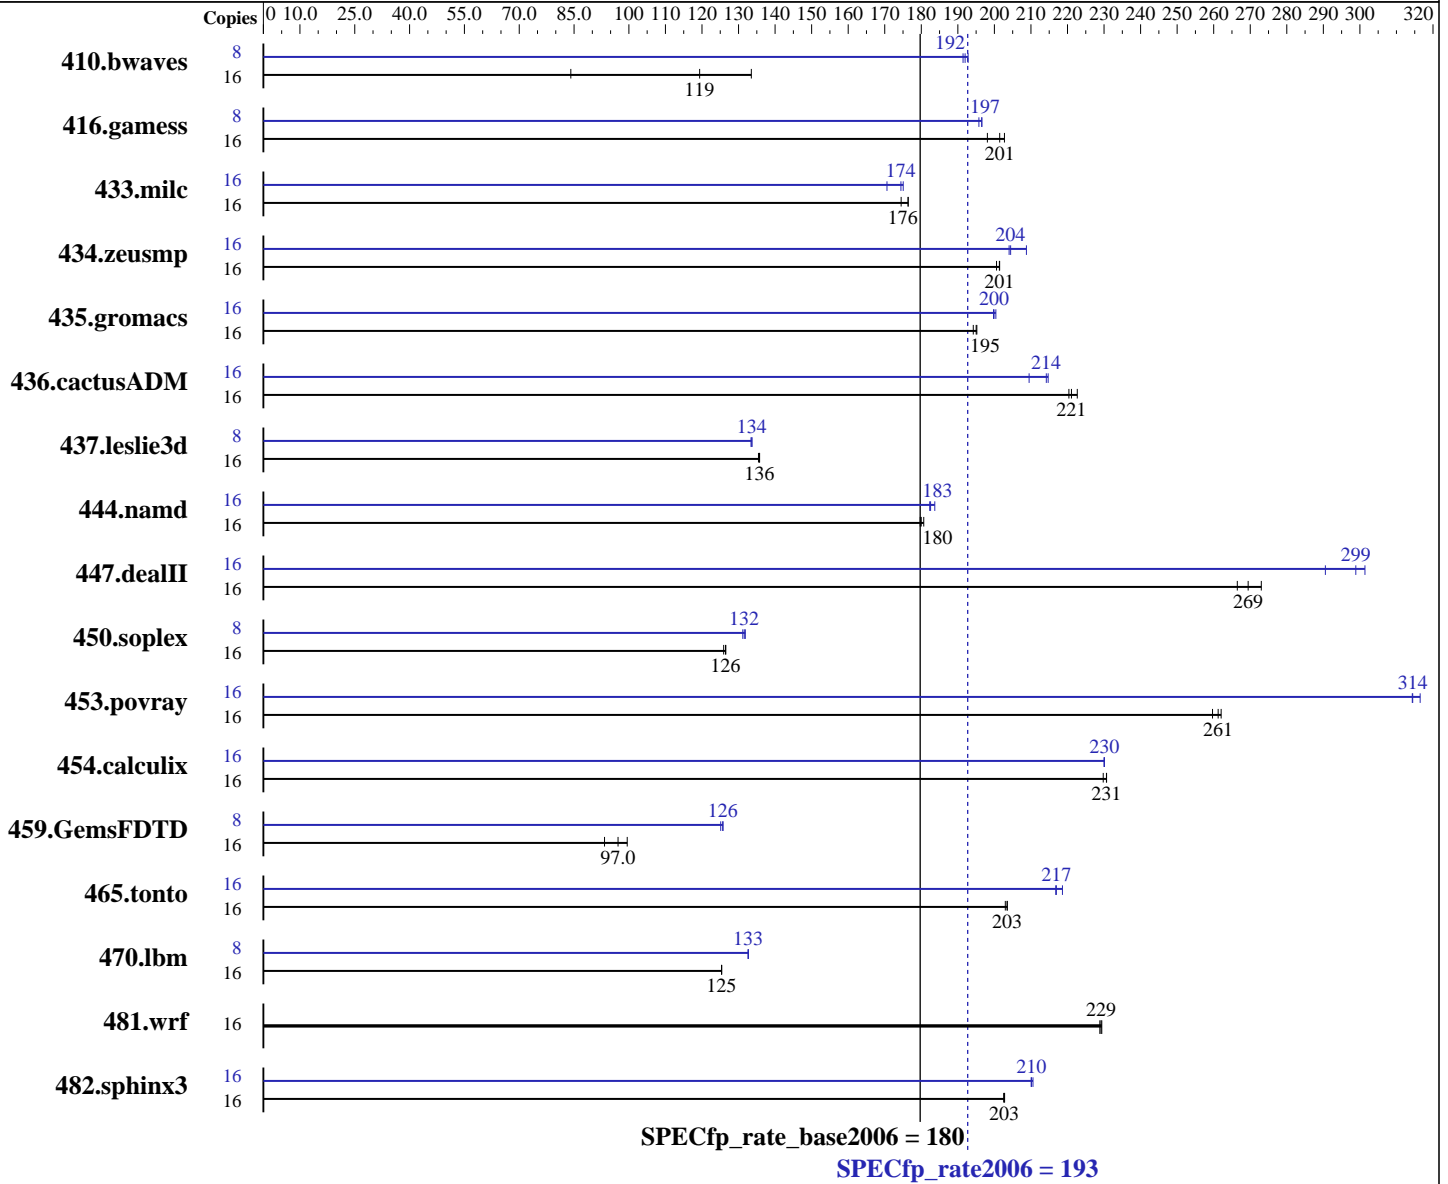

Hardware

CPU Name: Intel Xeon X5560
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz, 6.4 GT/s QPI
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSe Linux SLES10 SP2, Kernel 2.6.16.60-0.34-smp for x86_64
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.081, l_cprof_p_11.0.081
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 193

Servidor Itaotec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 180

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4GB DDR3-1333, CL 9, ECC)
Disk Subsystem: 1 x 160 GB SATA-2, 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	2585	84.1	<u>1822</u>	<u>119</u>	1629	133	8	564	193	<u>566</u>	<u>192</u>	568	191
416.gamess	16	<u>1555</u>	<u>201</u>	1582	198	1545	203	8	<u>797</u>	<u>197</u>	800	196	797	197
433.milc	16	842	174	<u>833</u>	<u>176</u>	833	176	16	861	171	839	175	<u>842</u>	<u>174</u>
434.zeusmp	16	723	201	<u>723</u>	<u>201</u>	726	201	16	714	204	<u>712</u>	<u>204</u>	697	209
435.gromacs	16	585	195	588	194	<u>586</u>	<u>195</u>	16	572	200	570	200	<u>571</u>	<u>200</u>
436.cactusADM	16	859	223	868	220	<u>865</u>	<u>221</u>	16	913	210	<u>893</u>	<u>214</u>	891	215
437.leslie3d	16	1108	136	1110	135	<u>1108</u>	<u>136</u>	8	563	134	564	133	<u>563</u>	<u>134</u>
444.namd	16	<u>713</u>	<u>180</u>	710	181	714	180	16	704	182	<u>703</u>	<u>183</u>	699	184
447.dealII	16	670	273	687	266	<u>679</u>	<u>269</u>	16	607	301	630	291	<u>612</u>	<u>299</u>
450.soplex	16	<u>1055</u>	<u>126</u>	1060	126	1055	127	8	506	132	<u>507</u>	<u>132</u>	509	131
453.povray	16	328	260	325	262	<u>326</u>	<u>261</u>	16	269	316	271	314	<u>271</u>	<u>314</u>
454.calculix	16	574	230	572	231	<u>572</u>	<u>231</u>	16	<u>574</u>	<u>230</u>	574	230	574	230
459.GemsFDTD	16	<u>1749</u>	<u>97.0</u>	1705	99.5	1819	93.3	8	<u>675</u>	<u>126</u>	678	125	675	126
465.tonto	16	<u>774</u>	<u>203</u>	776	203	774	204	16	720	219	726	217	<u>726</u>	<u>217</u>
470.lbm	16	<u>1753</u>	<u>125</u>	1753	125	1754	125	8	829	133	<u>829</u>	<u>133</u>	829	133
481.wrf	16	781	229	<u>780</u>	<u>229</u>	779	229	16	781	229	<u>780</u>	<u>229</u>	779	229
482.sphinx3	16	1538	203	<u>1538</u>	<u>203</u>	1540	203	16	1481	211	1484	210	<u>1484</u>	<u>210</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

This result was measured on the Servidor Itaotec MX223.
The Servidor Itaotec MX223 and the Servidor Itaotec MX203 are electronically equivalent.

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 193

Servidor Itaotec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 180

CPU2006 license: 9001

Test date: Apr-2009

Test sponsor: Itaotec

Hardware Availability: Mar-2009

Tested by: Itaotec

Software Availability: Feb-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 193

Servidor Itautec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 180

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp_rate2006 = 193

Servidor Itaotec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 180

CPU2006 license: 9001
Test sponsor: Itaotec
Tested by: Itaotec

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 193

Servidor Itautec MX223 (Intel Xeon X5560)

SPECfp_rate_base2006 = 180

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:00:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 April 2009.