



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S6, Intel Core 2 Duo E7400, 2.80 GHz

SPECint®_rate2006 = 39.9

SPECint_rate_base2006 = 37.4

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

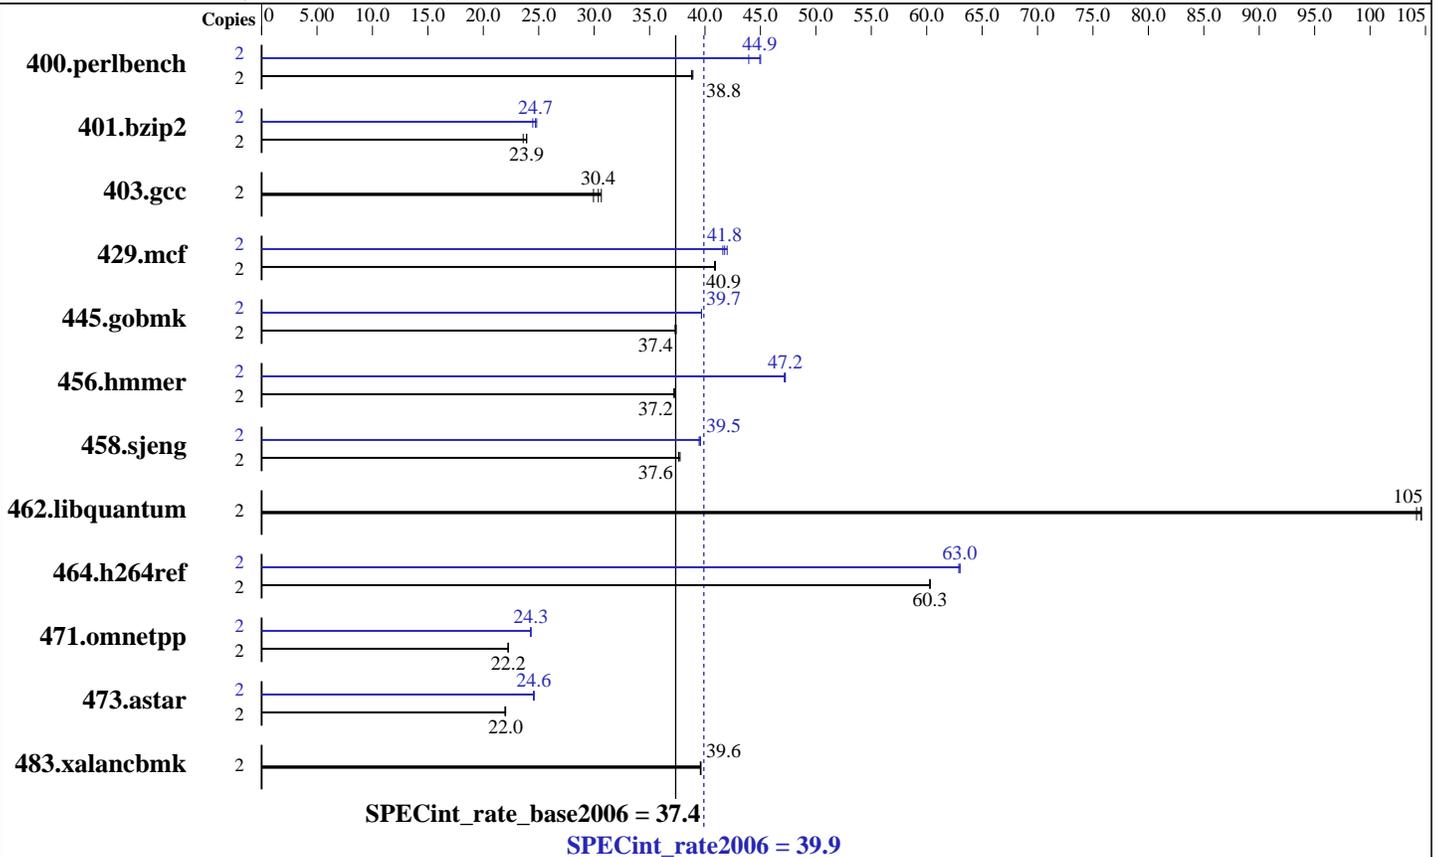

Hardware

CPU Name: Intel Core 2 Duo E7400
 CPU Characteristics: 1067 MHz system bus
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 3 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4x2 GB PC2-6400E, 2 rank, CL6-6-6, ECC)
 Disk Subsystem: 1x SATA, 250 GB, 7200 rpm
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: No
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S6, Intel Core 2 Duo E7400, 2.80 GHz

SPECint_rate2006 = 39.9

SPECint_rate_base2006 = 37.4

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	504	38.8	504	38.8	502	38.9	2	445	43.9	435	44.9	434	45.0
401.bzip2	2	818	23.6	807	23.9	807	23.9	2	778	24.8	781	24.7	789	24.5
403.gcc	2	525	30.6	530	30.4	538	29.9	2	525	30.6	530	30.4	538	29.9
429.mcf	2	446	40.9	446	40.9	446	40.9	2	438	41.6	434	42.0	437	41.8
445.gobmk	2	561	37.4	562	37.3	561	37.4	2	529	39.7	529	39.7	529	39.7
456.hammer	2	501	37.2	501	37.2	501	37.2	2	395	47.3	395	47.2	396	47.2
458.sjeng	2	643	37.6	641	37.8	643	37.6	2	612	39.5	611	39.6	613	39.5
462.libquantum	2	398	104	396	105	396	105	2	398	104	396	105	396	105
464.h264ref	2	734	60.3	734	60.3	734	60.3	2	704	62.9	703	63.0	703	63.0
471.omnetpp	2	562	22.2	562	22.2	562	22.2	2	514	24.3	515	24.3	515	24.3
473.astar	2	640	21.9	638	22.0	638	22.0	2	573	24.5	571	24.6	571	24.6
483.xalancbmk	2	348	39.6	348	39.6	349	39.6	2	348	39.6	348	39.6	349	39.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset has been used to bind processes to cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
Adjacent Sector Prefetch = Disable

General Notes

For information about Fujitsu please visit:
<http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S6, Intel Core 2 Duo E7400, 2.80 GHz

SPECint_rate2006 = 39.9

SPECint_rate_base2006 = 37.4

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc
456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S6, Intel Core 2 Duo E7400, 2.80 GHz

SPECint_rate2006 = 39.9

SPECint_rate_base2006 = 37.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: basepeak = yes

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S6, Intel Core 2 Duo E7400, 2.80 GHz

SPECint_rate2006 = 39.9

SPECint_rate_base2006 = 37.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.04.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.04.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:59:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 April 2009.