



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 224

PowerEdge M905 (AMD Opteron 8379 HE, 2.40 GHz)

SPECint\_rate\_base2006 = 186

CPU2006 license: 55


Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

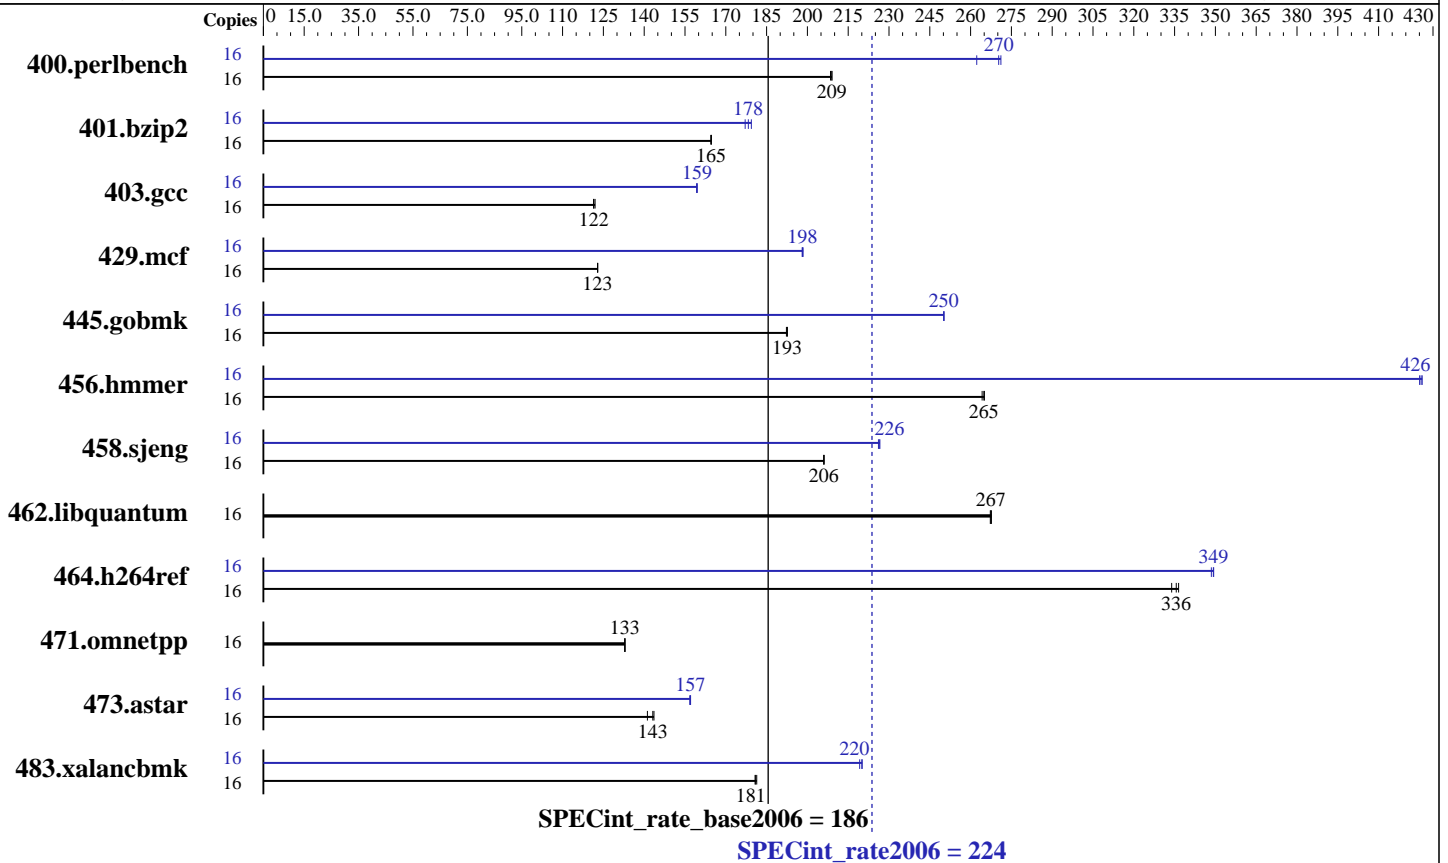

## Hardware

CPU Name: AMD Opteron 8379 HE  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8 x 4 GB DDR2-800)  
 Disk Subsystem: 1 x 73 GB 10000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 32-bit and 64-bit libhugetlbfs libraries  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 224

PowerEdge M905 (AMD Opteron 8379 HE, 2.40 GHz)

SPECint\_rate\_base2006 = 186

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	750	208	748	209	<b><u>748</u></b>	<b><u>209</u></b>	16	<b><u>578</u></b>	<b><u>270</u></b>	596	262	577	271
401.bzip2	16	939	164	937	165	<b><u>938</u></b>	<b><u>165</u></b>	16	861	179	<b><u>866</u></b>	<b><u>178</u></b>	872	177
403.gcc	16	<b><u>1060</u></b>	<b><u>122</u></b>	1061	121	1056	122	16	809	159	<b><u>808</u></b>	<b><u>159</u></b>	808	159
429.mcf	16	<b><u>1187</u></b>	<b><u>123</u></b>	1187	123	1188	123	16	735	198	<b><u>736</u></b>	<b><u>198</u></b>	737	198
445.gobmk	16	873	192	<b><u>872</u></b>	<b><u>193</u></b>	871	193	16	671	250	<b><u>671</u></b>	<b><u>250</u></b>	671	250
456.hammer	16	<b><u>564</u></b>	<b><u>265</u></b>	563	265	565	264	16	351	425	<b><u>351</u></b>	<b><u>426</u></b>	350	426
458.sjeng	16	<b><u>940</u></b>	<b><u>206</u></b>	940	206	939	206	16	856	226	854	227	<b><u>855</u></b>	<b><u>226</u></b>
462.libquantum	16	1241	267	1239	268	<b><u>1240</u></b>	<b><u>267</u></b>	16	1241	267	1239	268	<b><u>1240</u></b>	<b><u>267</u></b>
464.h264ref	16	1060	334	<b><u>1055</u></b>	<b><u>336</u></b>	1052	336	16	<b><u>1014</u></b>	<b><u>349</u></b>	1013	349	1016	349
471.omnetpp	16	752	133	753	133	<b><u>752</u></b>	<b><u>133</u></b>	16	752	133	753	133	<b><u>752</u></b>	<b><u>133</u></b>
473.astar	16	782	144	<b><u>785</u></b>	<b><u>143</u></b>	796	141	16	715	157	<b><u>716</u></b>	<b><u>157</u></b>	717	157
483.xalancbmk	16	<b><u>610</u></b>	<b><u>181</u></b>	611	181	609	181	16	504	219	502	220	<b><u>502</u></b>	<b><u>220</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores

## Operating System Notes

The libhugetlbfs libraries were installed using the installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 224

PowerEdge M905 (AMD Opteron 8379 HE, 2.40 GHz)

SPECint\_rate\_base2006 = 186

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 224

PowerEdge M905 (AMD Opteron 8379 HE, 2.40 GHz)

SPECint\_rate\_base2006 = 186

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmcr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
 -IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
 -OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
 -m3dnow  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
 -LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
 -CG:prefer\_lru\_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -L/usr/lib -lhugetlbfs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 224

PowerEdge M905 (AMD Opteron 8379 HE, 2.40 GHz)

SPECint\_rate\_base2006 = 186

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
 -LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmer: -Mvect=cachesize:6291456 -fastsse -Mvect=partial  
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
 -tp barcelona-64 -Bstatic\_pgi

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
 -LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
 -LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: basepeak = yes

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse  
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed  
 --zc\_eh -tp barcelona-32 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
 -L/root/work/libraries/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 224

PowerEdge M905 (AMD Opteron 8379 HE, 2.40 GHz)

SPECint\_rate\_base2006 = 186

CPU2006 license: 55

Test date: Mar-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Other Flags (Continued)

C++ benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/pathscale32-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml)

<http://www.spec.org/cpu2006/flags/pathscale32-flags.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:03:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 May 2009.