



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix XE 270 (Intel Xeon X5570, 2.93 GHz)

SPECfp®_rate2006 = 198

SPECfp_rate_base2006 = 193

CPU2006 license: 4


Test sponsor: SGI

Tested by: SGI

Test date: Apr-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

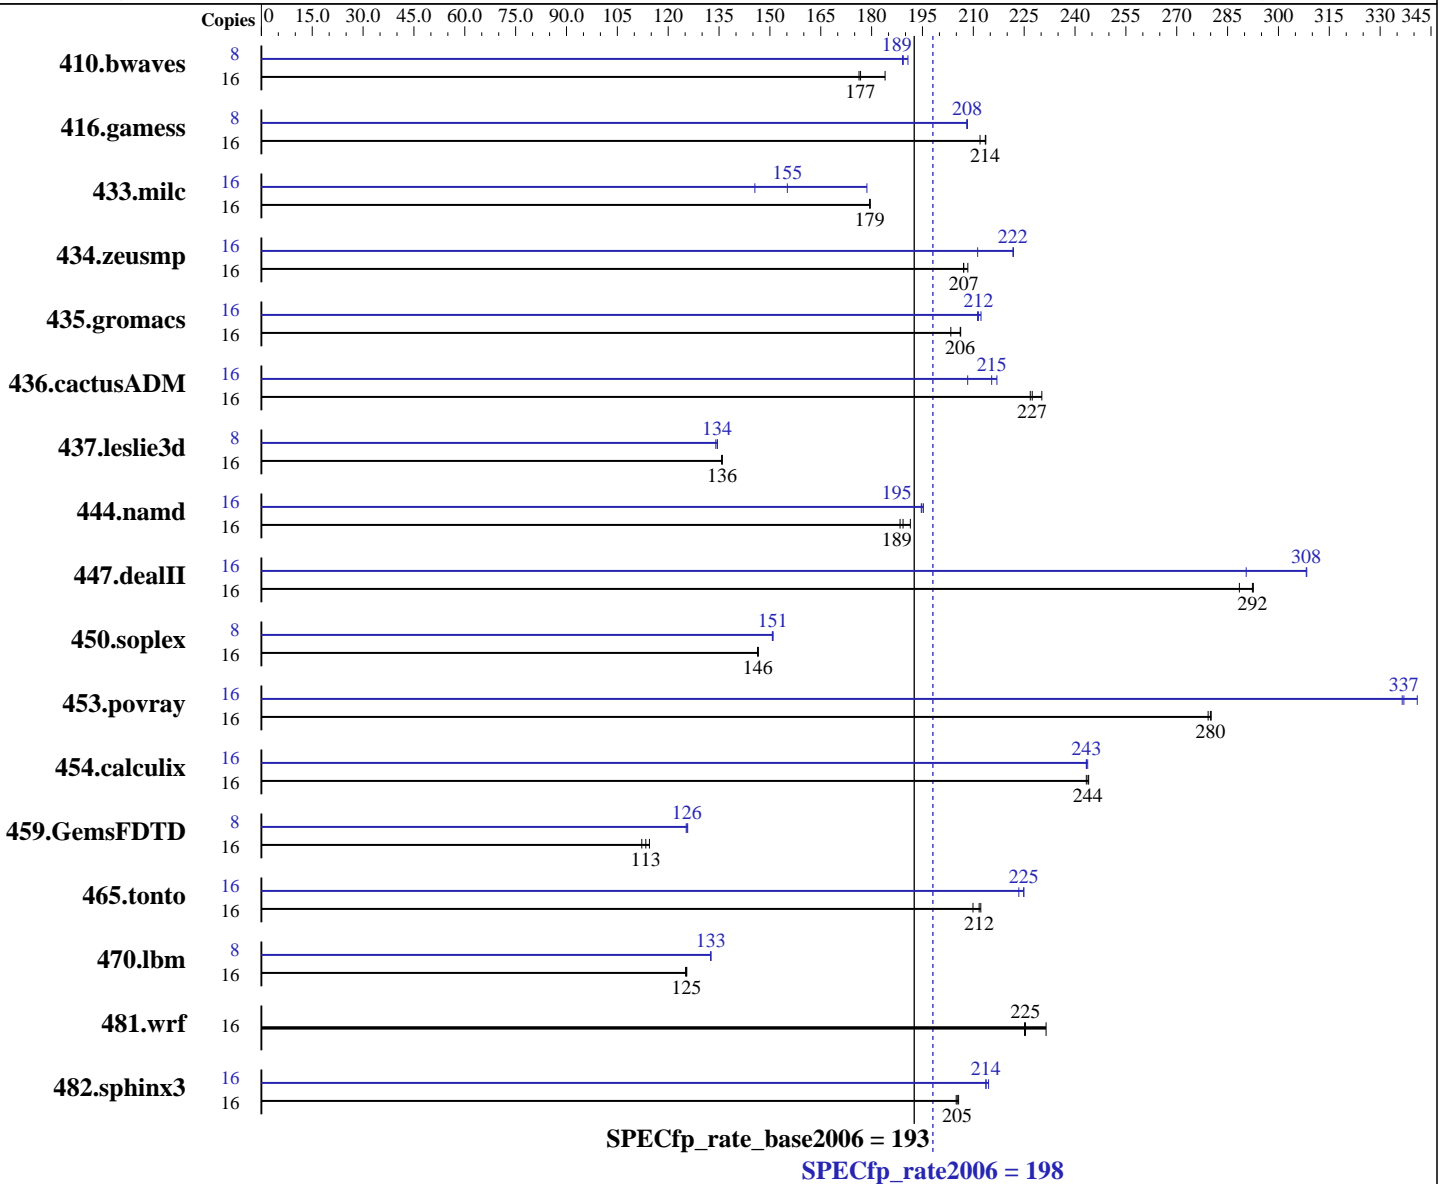

Hardware

CPU Name: Intel Xeon X5570
 CPU Characteristics: Quad Core, 2.93 GHz
 Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2934
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2,
 Kernel 2.6.16.60-0.30-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080,
 l_cprof_p_11.0.080
 Auto Parallel: No
 File System: xfs
 System State: Multi-user, run level 3
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix XE 270 (Intel Xeon X5570, 2.93 GHz)

SPECfp_rate2006 = 198

SPECfp_rate_base2006 = 193

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6*4GB DDR3-1333 CL9 RDIMMs)
Disk Subsystem: 3 TB RAID 0
6 x 500 GB SATA (Seagate Barracuda 7200 rpm)
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1182	184	1230	177	1233	176	8	575	189	570	191	574	189
416.gamess	16	1467	214	1466	214	1478	212	8	752	208	752	208	753	208
433.milc	16	818	180	819	179	818	179	16	822	179	947	155	1009	146
434.zeusmp	16	699	208	703	207	703	207	16	689	211	657	222	656	222
435.gromacs	16	554	206	562	203	554	206	16	538	212	540	212	541	211
436.cactusADM	16	841	227	831	230	843	227	16	881	217	918	208	888	215
437.leslie3d	16	1106	136	1107	136	1108	136	8	559	134	561	134	559	135
444.namd	16	670	191	678	189	681	188	16	659	195	657	195	659	195
447.dealII	16	635	288	626	292	626	293	16	594	308	630	290	594	308
450.soplex	16	910	147	912	146	911	146	8	443	151	442	151	442	151
453.povray	16	305	279	304	280	304	280	16	253	337	250	341	253	337
454.calculix	16	541	244	542	243	541	244	16	542	243	542	244	542	243
459.GemsFDTD	16	1483	114	1497	113	1513	112	8	676	126	677	125	675	126
465.tonto	16	742	212	744	212	750	210	16	700	225	705	223	700	225
470.lbm	16	1752	125	1753	125	1757	125	8	829	133	829	133	829	133
481.wrf	16	794	225	772	231	793	225	16	794	225	772	231	793	225
482.sphinx3	16	1516	206	1519	205	1522	205	16	1454	215	1459	214	1459	214

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

General Notes

SGI ProPack 6 for Linux Service Pack 2 installed
Adjacent cacheline prefetch enabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix XE 270 (Intel Xeon X5570,
2.93 GHz)

SPECfp_rate2006 = 198

SPECfp_rate_base2006 = 193

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Apr-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.lelie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix XE 270 (Intel Xeon X5570,
2.93 GHz)

SPECfp_rate2006 = 198

SPECfp_rate_base2006 = 193

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Apr-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix XE 270 (Intel Xeon X5570,
2.93 GHz)

SPECfp_rate2006 = 198

SPECfp_rate_base2006 = 193

CPU2006 license: 4
Test sponsor: SGI
Tested by: SGI

Test date: Apr-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

SGI

SGI Altix XE 270 (Intel Xeon X5570, 2.93 GHz)

SPECfp_rate2006 = 198

SPECfp_rate_base2006 = 193

CPU2006 license: 4

Test sponsor: SGI

Tested by: SGI

Test date: Apr-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.04.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:38:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 May 2009.