



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 26.0

IBM System x3200 M2 (Intel Xeon X3380)

SPECfp_base2006 = 25.2

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2009

Hardware Availability: Jun-2009

Software Availability: Nov-2008

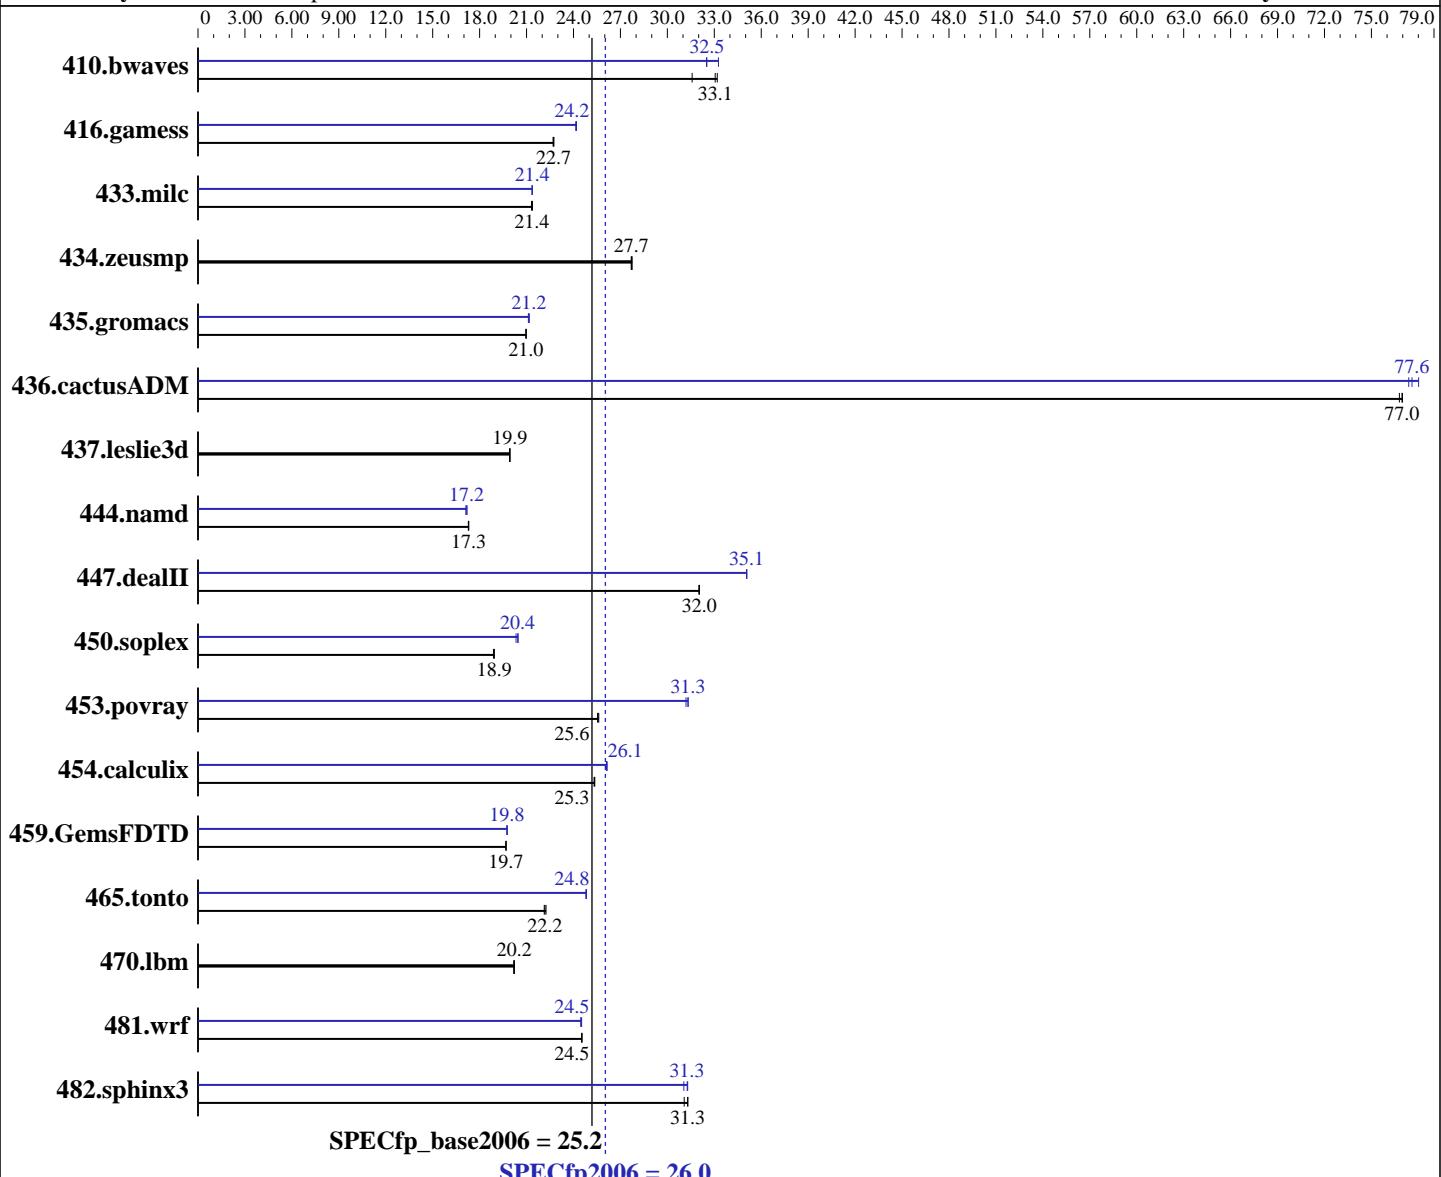

Hardware

CPU Name: Intel Xeon X3380
CPU Characteristics: 1333 MHz system bus
CPU MHz: 3167
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
Auto Parallel: Yes
File System: ReiserFS
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation		SPECfp2006 = 26.0	
IBM System x3200 M2 (Intel Xeon X3380)		SPECfp_base2006 = 25.2	
CPU2006 license:	11	Test date:	Apr-2009
Test sponsor:	IBM Corporation	Hardware Availability:	Jun-2009
Tested by:	IBM Corporation	Software Availability:	Nov-2008
L3 Cache:	None	Peak Pointers:	32/64-bit
Other Cache:	None	Other Software:	Binutils 2.18.50.0.7.20080502
Memory:	8 GB (4 x 2 GB PC2-6400E ECC)		
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM		
Other Hardware:	None		

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	430	31.6	411	33.1	409	33.2	409	33.3	418	32.5	418	32.5
416.gamess	861	22.7	863	22.7	861	22.7	809	24.2	811	24.1	809	24.2
433.milc	431	21.3	430	21.4	429	21.4	430	21.4	430	21.4	430	21.4
434.zeusmp	328	27.7	329	27.7	328	27.7	328	27.7	329	27.7	328	27.7
435.gromacs	341	21.0	340	21.0	340	21.0	338	21.1	337	21.2	338	21.2
436.cactusADM	156	76.8	155	77.0	155	77.0	154	77.6	153	78.0	154	77.4
437.leslie3d	472	19.9	472	19.9	471	19.9	472	19.9	472	19.9	471	19.9
444.namd	463	17.3	464	17.3	464	17.3	469	17.1	467	17.2	467	17.2
447.dealII	357	32.0	357	32.1	357	32.0	326	35.1	326	35.1	326	35.1
450.soplex	440	18.9	441	18.9	442	18.9	408	20.5	408	20.4	410	20.3
453.povray	208	25.6	208	25.5	208	25.6	170	31.3	171	31.2	170	31.3
454.calculix	326	25.3	326	25.3	325	25.4	316	26.1	315	26.2	316	26.1
459.GemsFDTD	539	19.7	539	19.7	539	19.7	537	19.8	537	19.7	537	19.8
465.tonto	442	22.2	444	22.2	445	22.1	396	24.8	396	24.8	397	24.8
470.lbm	681	20.2	679	20.2	680	20.2	681	20.2	679	20.2	680	20.2
481.wrf	455	24.5	455	24.5	455	24.5	456	24.5	456	24.5	456	24.5
482.sphinx3	622	31.3	623	31.3	627	31.1	623	31.3	623	31.3	628	31.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 OMP_NUM_THREADS set to number of processors
 KMP_AFFINITY set to "physical,0"
 KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	26.0
IBM System x3200 M2 (Intel Xeon X3380)	SPECfp_base2006 =	25.2
CPU2006 license: 11	Test date:	Apr-2009
Test sponsor: IBM Corporation	Hardware Availability:	Jun-2009
Tested by: IBM Corporation	Software Availability:	Nov-2008

Base Compiler Invocation (Continued)

Fortran benchmarks:
 `ifort`

Benchmarks using both Fortran and C:
 `icc ifort`

Base Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
 437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 450.soplex: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`
482.sphinx3: `-DSPEC_CPU_LP64`

Base Optimization Flags

C benchmarks:
 `-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

C++ benchmarks:
 `-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Fortran benchmarks:
 `-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:
 `-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks (except as noted below):
 `icc`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	26.0
IBM System x3200 M2 (Intel Xeon X3380)	SPECfp_base2006 =	25.2
CPU2006 license: 11	Test date:	Apr-2009
Test sponsor: IBM Corporation	Hardware Availability:	Jun-2009
Tested by: IBM Corporation	Software Availability:	Nov-2008

Peak Compiler Invocation (Continued)

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):

`icpc`

450.soplex: `icpc -m32`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`icc ifort`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
 433.milc: `-DSPEC_CPU_LP64`
 434.zeusmp: `-DSPEC_CPU_LP64`
 435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
 444.namd: `-DSPEC_CPU_LP64`
 447.dealII: `-DSPEC_CPU_LP64`
 453.povray: `-DSPEC_CPU_LP64`
 454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
 465.tonto: `-DSPEC_CPU_LP64`
 470.lbm: `-DSPEC_CPU_LP64`
 481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: `-prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2`

C++ benchmarks:

444.namd: `-prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3 -no-prec-div -static -fno-alias -auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp2006 =	26.0
IBM System x3200 M2 (Intel Xeon X3380)	SPECfp_base2006 =	25.2
CPU2006 license: 11	Test date:	Apr-2009
Test sponsor: IBM Corporation	Hardware Availability:	Jun-2009
Tested by: IBM Corporation	Software Availability:	Nov-2008

Peak Optimization Flags (Continued)

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
 -opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
 -parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll2 -Ob0 -ansi-alias
 -scatter-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll2 -Ob0 -opt-prefetch
 -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xsse4.1 -ipo -O3
 -no-prec-div -static -unroll2 -opt-prefetch -parallel
 -auto-ilp32

454.calculix: -xsse4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xsse4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
 -parallel -auto-ilp32

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 26.0

IBM System x3200 M2 (Intel Xeon X3380)

SPECfp_base2006 = 25.2

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Jun-2009

Tested by: IBM Corporation

Software Availability: Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:40:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 June 2009.