



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 125

PowerEdge T605 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55


Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

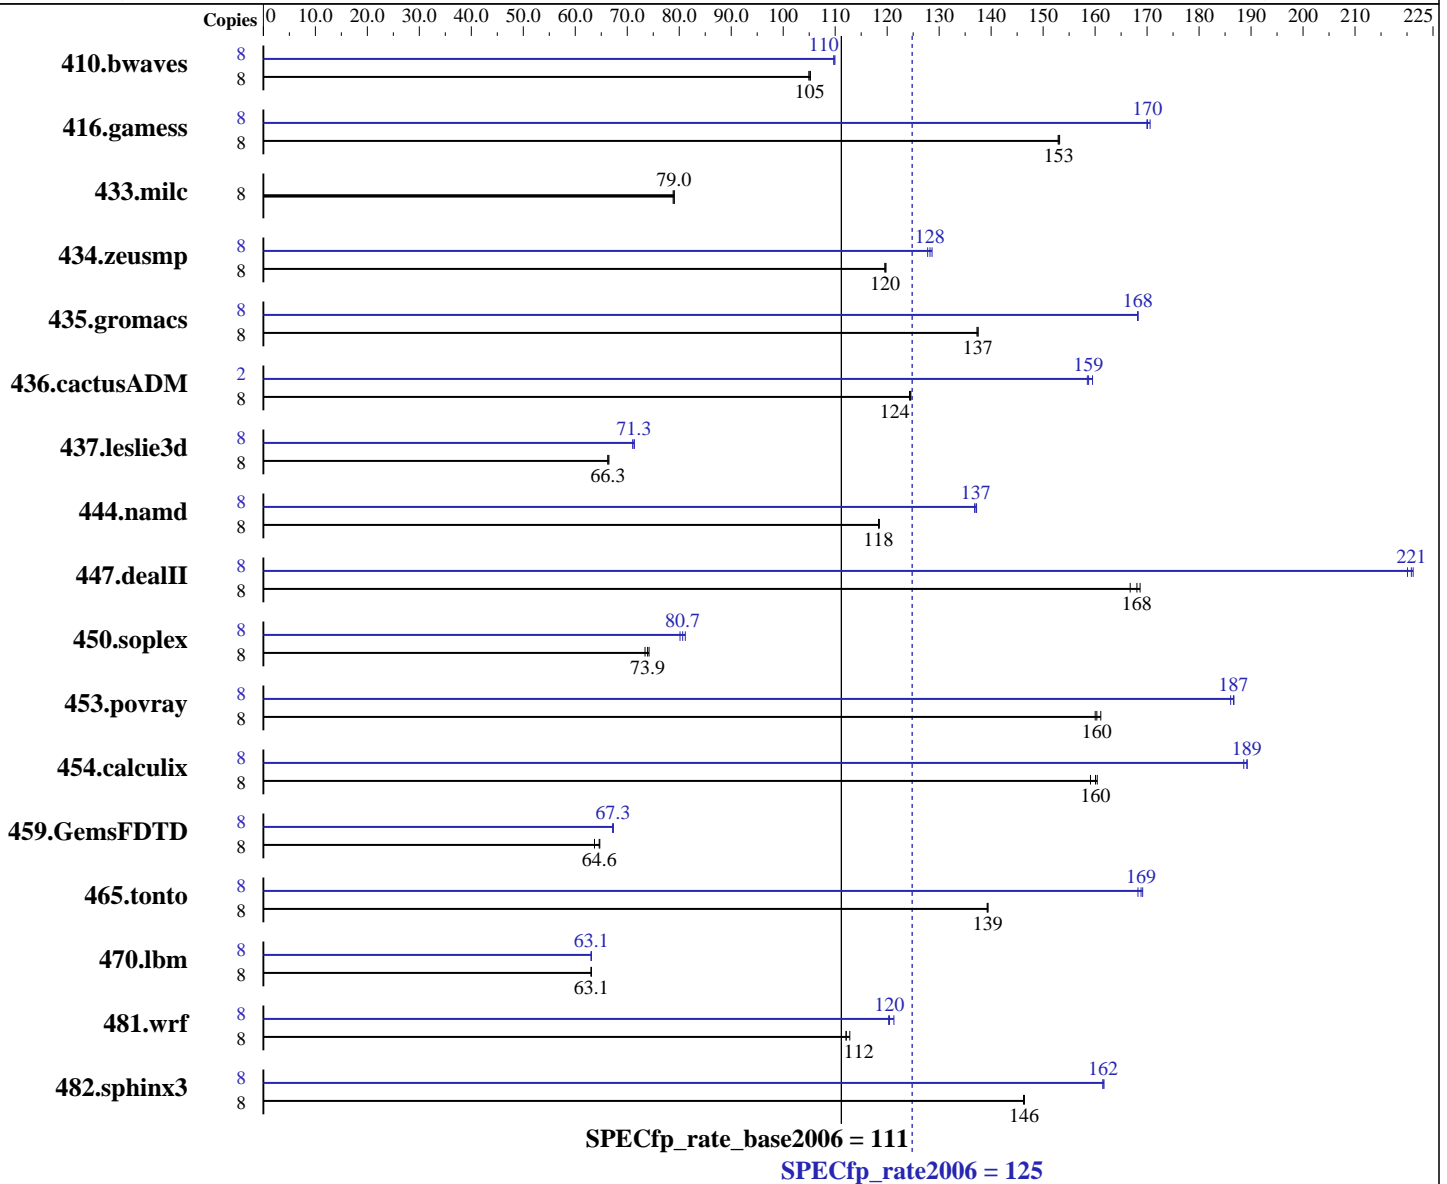

Hardware

CPU Name: AMD Opteron 2393 SE
 CPU Characteristics: 3100
 CPU MHz: Integrated
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 125

PowerEdge T605 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-800)
Disk Subsystem: 1 x 250 GB 7200 RPM SATA
Other Hardware: None

Other Software: binutils 2.18
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1036	105	<u>1034</u>	<u>105</u>	1033	105	8	989	110	<u>990</u>	<u>110</u>	991	110
416.gamess	8	<u>1024</u>	<u>153</u>	1025	153	1023	153	8	<u>921</u>	<u>170</u>	918	171	922	170
433.milc	8	932	78.8	929	79.0	<u>929</u>	<u>79.0</u>	8	932	78.8	929	79.0	<u>929</u>	<u>79.0</u>
434.zeusmp	8	<u>609</u>	<u>120</u>	608	120	609	120	8	566	129	570	128	<u>568</u>	<u>128</u>
435.gromacs	8	<u>416</u>	<u>137</u>	416	137	415	137	8	<u>340</u>	<u>168</u>	340	168	340	168
436.cactusADM	8	769	124	<u>768</u>	<u>124</u>	767	125	2	151	159	150	160	<u>151</u>	<u>159</u>
437.leslie3d	8	1131	66.5	<u>1134</u>	<u>66.3</u>	1135	66.3	8	1054	71.3	<u>1054</u>	<u>71.3</u>	1059	71.0
444.namd	8	<u>542</u>	<u>118</u>	542	118	541	118	8	469	137	<u>468</u>	<u>137</u>	468	137
447.dealII	8	543	169	<u>545</u>	<u>168</u>	549	167	8	414	221	<u>414</u>	<u>221</u>	416	220
450.soplex	8	<u>903</u>	<u>73.9</u>	909	73.4	899	74.2	8	<u>827</u>	<u>80.7</u>	832	80.1	822	81.2
453.povray	8	266	160	<u>265</u>	<u>160</u>	264	161	8	229	186	<u>228</u>	<u>187</u>	228	187
454.calculix	8	415	159	411	160	<u>412</u>	<u>160</u>	8	<u>349</u>	<u>189</u>	349	189	350	189
459.GemsFDTD	8	1311	64.7	<u>1314</u>	<u>64.6</u>	1333	63.7	8	1263	67.2	<u>1262</u>	<u>67.3</u>	1261	67.3
465.tonto	8	<u>565</u>	<u>139</u>	565	139	565	139	8	465	169	<u>466</u>	<u>169</u>	468	168
470.lbm	8	1743	63.1	1742	63.1	<u>1743</u>	<u>63.1</u>	8	1743	63.1	<u>1743</u>	<u>63.1</u>	1742	63.1
481.wrf	8	<u>797</u>	<u>112</u>	797	112	792	113	8	737	121	<u>742</u>	<u>120</u>	743	120
482.sphinx3	8	<u>1066</u>	<u>146</u>	1066	146	1065	146	8	964	162	965	162	<u>965</u>	<u>162</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7168 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 125

PowerEdge T605 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_MORECORE = "yes"

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"

NCPUS = "4"

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 125

PowerEdge T605 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Optimization Flags (Continued)

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pgf95

416.gamess: pathf95

459.GemsFDTD: pathf95

465.tonto: pathf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 125

PowerEdge T605 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C (except as noted below):

pathcc pathf95

436.cactusADM: pgcc pgf95

454.calculix: pgcc pgf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mloop32 -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc
-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk
-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 125

PowerEdge T605 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

447.dealIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -Mvect=cachesize:6291456 -fastsse -Msmartalloc
-Mprefetch=nta -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 125

PowerEdge T605 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

436.cactusADM: -Mvect=cachesize:6291456 -fastsse -Mconcur
-Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 125

PowerEdge T605 (AMD Opteron 2393 SE, 3.10 GHz)

SPECfp_rate_base2006 = 111

CPU2006 license: 55

Test date: May-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html
<http://www.spec.org/cpu2006/flags/pathscale32-flags.html>
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml
<http://www.spec.org/cpu2006/flags/pathscale32-flags.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:24:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.