



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity BL860c (1.66GHz/18MB Dual-Core  
Intel Itanium 2)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 61.0**

CPU2006 license: 03


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

**Test date:** May-2009

**Hardware Availability:** Nov-2007

**Software Availability:** Mar-2009

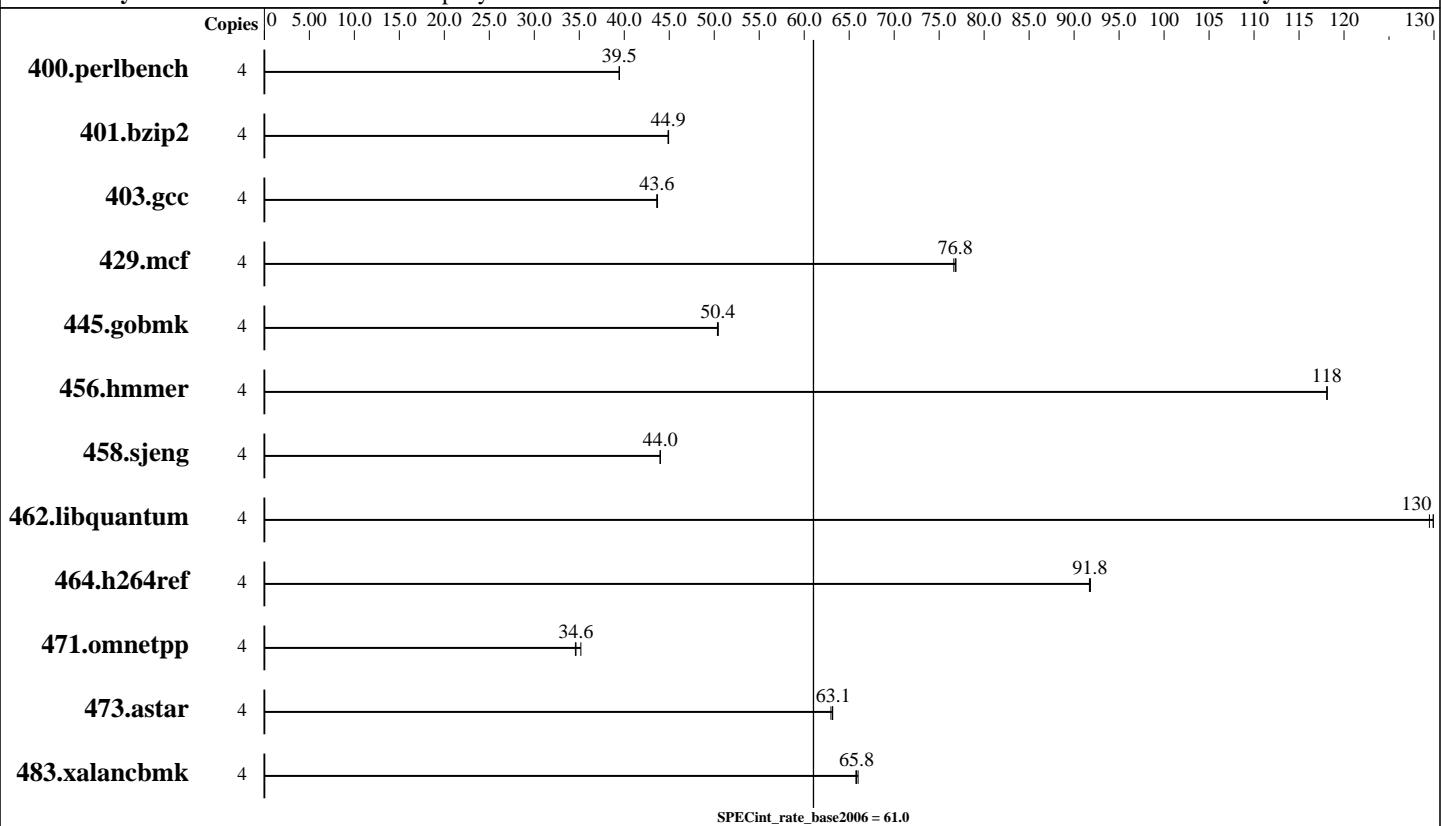

### Hardware

CPU Name: Dual-Core Intel Itanium 9140M  
CPU Characteristics: 1.66GHz/18MB, 667MHz FSB  
CPU MHz: 1666  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core  
CPU(s) orderable: 1-2 chips  
Primary Cache: 16 KB I + 16 KB D on chip per core  
Secondary Cache: 1 MB I + 256 KB D on chip per core  
L3 Cache: 9 MB I+D on chip per core  
Other Cache: None  
Memory: 48 GB (12x4GB PC-4200 DIMMs)  
Disk Subsystem: 2x73 GB 15K RPM SAS  
Other Hardware: None

### Software

Operating System: HPUX11i-DC-OE B.11.31.0903  
Compiler: HP C/aC++ Developer's Bundle C.11.31.04.2  
Auto Parallel: No  
File System: vxfs  
System State: Multi-user  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: MallocNextGen B.11.31.0903.02



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity BL860c (1.66GHz/18MB Dual-Core  
Intel Itanium 2)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 61.0**

CPU2006 license: 03

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>990</b>	<b>39.5</b>	991	39.4	990	39.5							
401.bzip2	4	860	44.9	859	44.9	<b>860</b>	<b>44.9</b>							
403.gcc	4	737	43.7	<b>738</b>	<b>43.6</b>	738	43.6							
429.mcf	4	475	76.9	<b>475</b>	<b>76.8</b>	476	76.6							
445.gobmk	4	832	50.4	<b>832</b>	<b>50.4</b>	833	50.4							
456.hmmer	4	316	118	316	118	<b>316</b>	<b>118</b>							
458.sjeng	4	<b>1100</b>	<b>44.0</b>	1100	44.0	1100	44.0							
462.libquantum	4	<b>638</b>	<b>130</b>	638	130	640	129							
464.h264ref	4	964	91.8	<b>965</b>	<b>91.8</b>	965	91.7							
471.omnetpp	4	723	34.6	711	35.2	<b>722</b>	<b>34.6</b>							
473.astar	4	445	63.2	446	63.0	<b>445</b>	<b>63.1</b>							
483.xalancbmk	4	418	66.0	420	65.7	<b>419</b>	<b>65.8</b>							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

The system had the March 2009 HP-UX 11i v3 Data Center Operating Environment and March 2009 compilers installed.

The following kernel tunables were set, in addition to the defaults set by the Base Operating Environment:

```
filecache_max=25%
filecache_min=25%
maxdsiz=3221225472
fcache_fb_policy=1
base_pagesize=64
pagezero_daemon_enabled=0
vxfs_ifree_timelag=-1
```

## Platform Notes

Hardware Threading was disabled

The following config file entry was used to bind processes to cores using the HP-UX "mpsched" utility:

```
submit = let "MYCPU=\$SPECCOPYNUM*2" ;mpsched -c \$MYCPU $command
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

HP Integrity BL860c (1.66GHz/18MB Dual-Core  
Intel Itanium 2)

**SPECint\_rate2006 = Not Run**

**SPECint\_rate\_base2006 = 61.0**

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: May-2009

Hardware Availability: Nov-2007

Software Availability: Mar-2009

## Base Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -AC99

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_HPUX\_IA64

403.gcc: -DSPEC\_CPU\_HPUX

462.libquantum: -DSPEC\_CPU\_HPUX

483.xalancbmk: -DSPEC\_CPU\_HPUX\_IA64

## Base Optimization Flags

C benchmarks:

+Ofaster +Otype\_safety=ansi -Wl,-aarchive\_shared -Wl,+pd,64M  
-Wl,+pi,64K -Wl,-N

C++ benchmarks:

+Ofaster +Otype\_safety=ansi -Wl,-aarchive\_shared -Wl,+pd,64M  
-Wl,+pi,64K -Wl,-N -lmallocng

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itanium-HPUX-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itanium-HPUX-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:13:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 June 2009.