



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = Not Run

HP Integrity BL870c (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 114

CPU2006 license: 03


Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

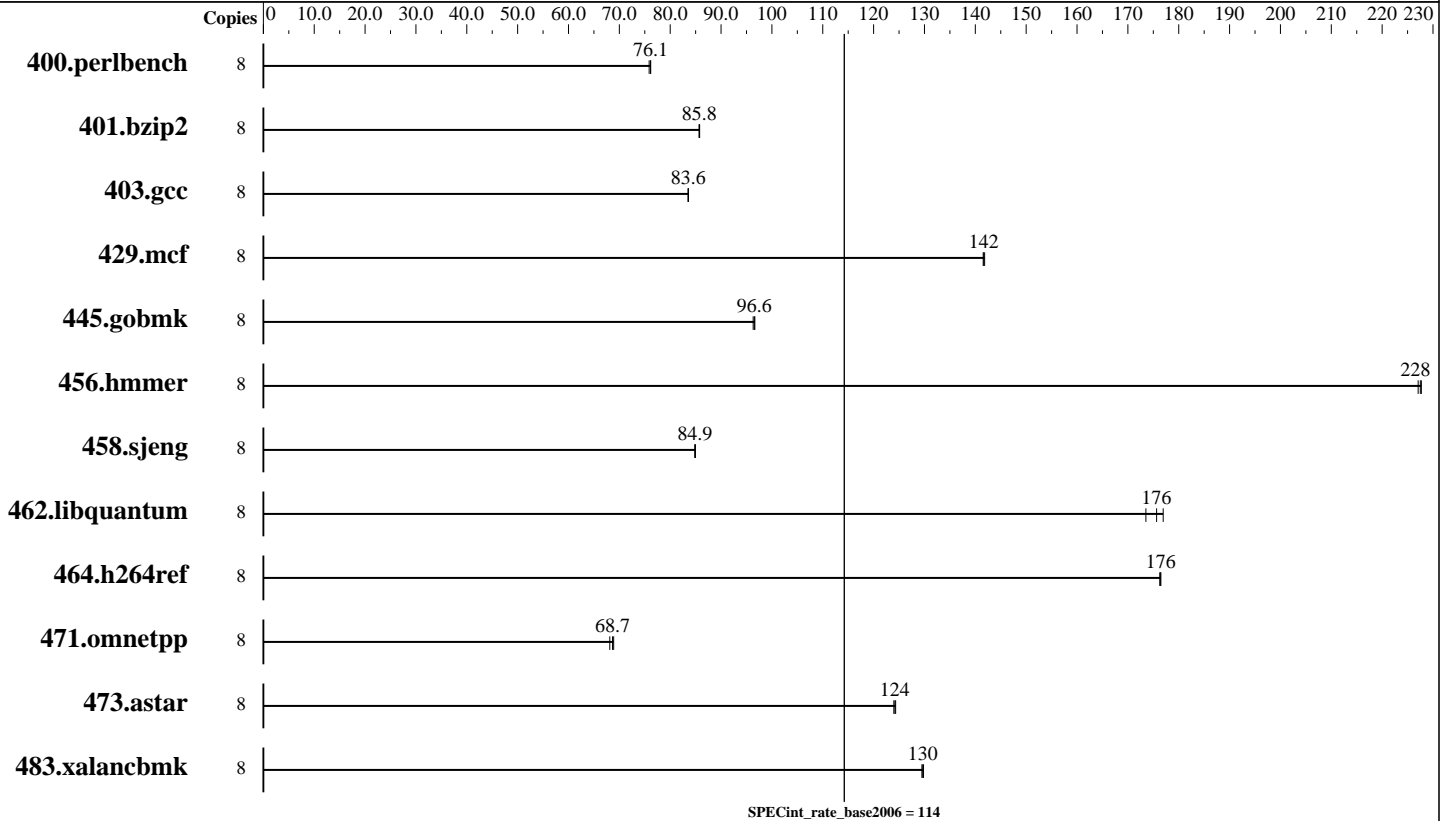

Hardware

CPU Name: Dual-Core Intel Itanium 9150N
 CPU Characteristics: 1.6GHz/24MB, 533MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip
 CPU(s) orderable: 1-4 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core
 L3 Cache: 12 MB I+D on chip per core
 Other Cache: None
 Memory: 96 GB (24x4GB PC-4200 DIMMs)
 Disk Subsystem: 2x73 GB 15K RPM SAS
 Other Hardware: None

Software

Operating System: HPUX11i-DC-OE B.11.31.0903
 Compiler: HP C/aC++ Developer's Bundle C.11.31.04.2
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MallocNextGen B.11.31.0903.02



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = Not Run

HP Integrity BL870c (1.6GHz/24MB Dual-Core Intel Itanium 2)

SPECint_rate_base2006 = 114

CPU2006 license: 03

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1026	76.2	<u>1027</u>	<u>76.1</u>	1030	75.9							
401.bzip2	8	900	85.8	<u>900</u>	<u>85.8</u>	901	85.7							
403.gcc	8	771	83.5	771	83.6	<u>771</u>	<u>83.6</u>							
429.mcf	8	515	142	<u>515</u>	<u>142</u>	514	142							
445.gobmk	8	<u>869</u>	<u>96.6</u>	868	96.6	871	96.3							
456.hammer	8	329	227	<u>328</u>	<u>228</u>	328	228							
458.sjeng	8	<u>1140</u>	<u>84.9</u>	1141	84.8	1139	85.0							
462.libquantum	8	<u>944</u>	<u>176</u>	955	174	937	177							
464.h264ref	8	<u>1003</u>	<u>176</u>	1004	176	1003	176							
471.omnetpp	8	<u>728</u>	<u>68.7</u>	726	68.9	734	68.1							
473.astar	8	<u>452</u>	<u>124</u>	453	124	452	124							
483.xalancbmk	8	<u>426</u>	<u>130</u>	425	130	426	129							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

The system had the March 2009 HP-UX 11i v3 Data Center Operating Environment and March 2009 compilers installed.

The following kernel tunables were set, in addition to the defaults set by the Base Operating Environment:

```

filecache_max=25%
filecache_min=25%
maxdsiz=3221225472
fcache_fb_policy=1
base_pagesize=64
pagezero_daemon_enabled=0
vxfs_ifree_timelag=-1

```

Platform Notes

Hardware Threading was disabled

The following config file entry was used to bind processes to cores using the HP-UX "mpsched" utility:

```
submit = let "MYCPU=\$SPEC COPYPNUM*2" ;mpsched -c \$MYCPU $command
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = Not Run

HP Integrity BL870c (1.6GHz/24MB Dual-Core
Intel Itanium 2)

SPECint_rate_base2006 = 114

CPU2006 license: 03

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2007

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

Base Compiler Invocation

C benchmarks:

`/opt/ansic/bin/cc -AC99`

C++ benchmarks:

`/opt/aCC/bin/aCC -Aa`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_HPUX_IA64`

403.gcc: `-DSPEC_CPU_HPUX`

462.libquantum: `-DSPEC_CPU_HPUX`

483.xalancbmk: `-DSPEC_CPU_HPUX_IA64`

Base Optimization Flags

C benchmarks:

`+Ofaster +Otype_safety=ansi -Wl,-aarchive_shared -Wl,+pd,64M`

`-Wl,+pi,64K -Wl,-N`

C++ benchmarks:

`+Ofaster +Otype_safety=ansi -Wl,-aarchive_shared -Wl,+pd,64M`

`-Wl,+pi,64K -Wl,-N -lmallocng`

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itanium-HPUX-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itanium-HPUX-flags.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:11:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 June 2009.