



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 22.2

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECfp_base2006 = 21.3

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2009

Hardware Availability: Nov-2008

Software Availability: Feb-2009

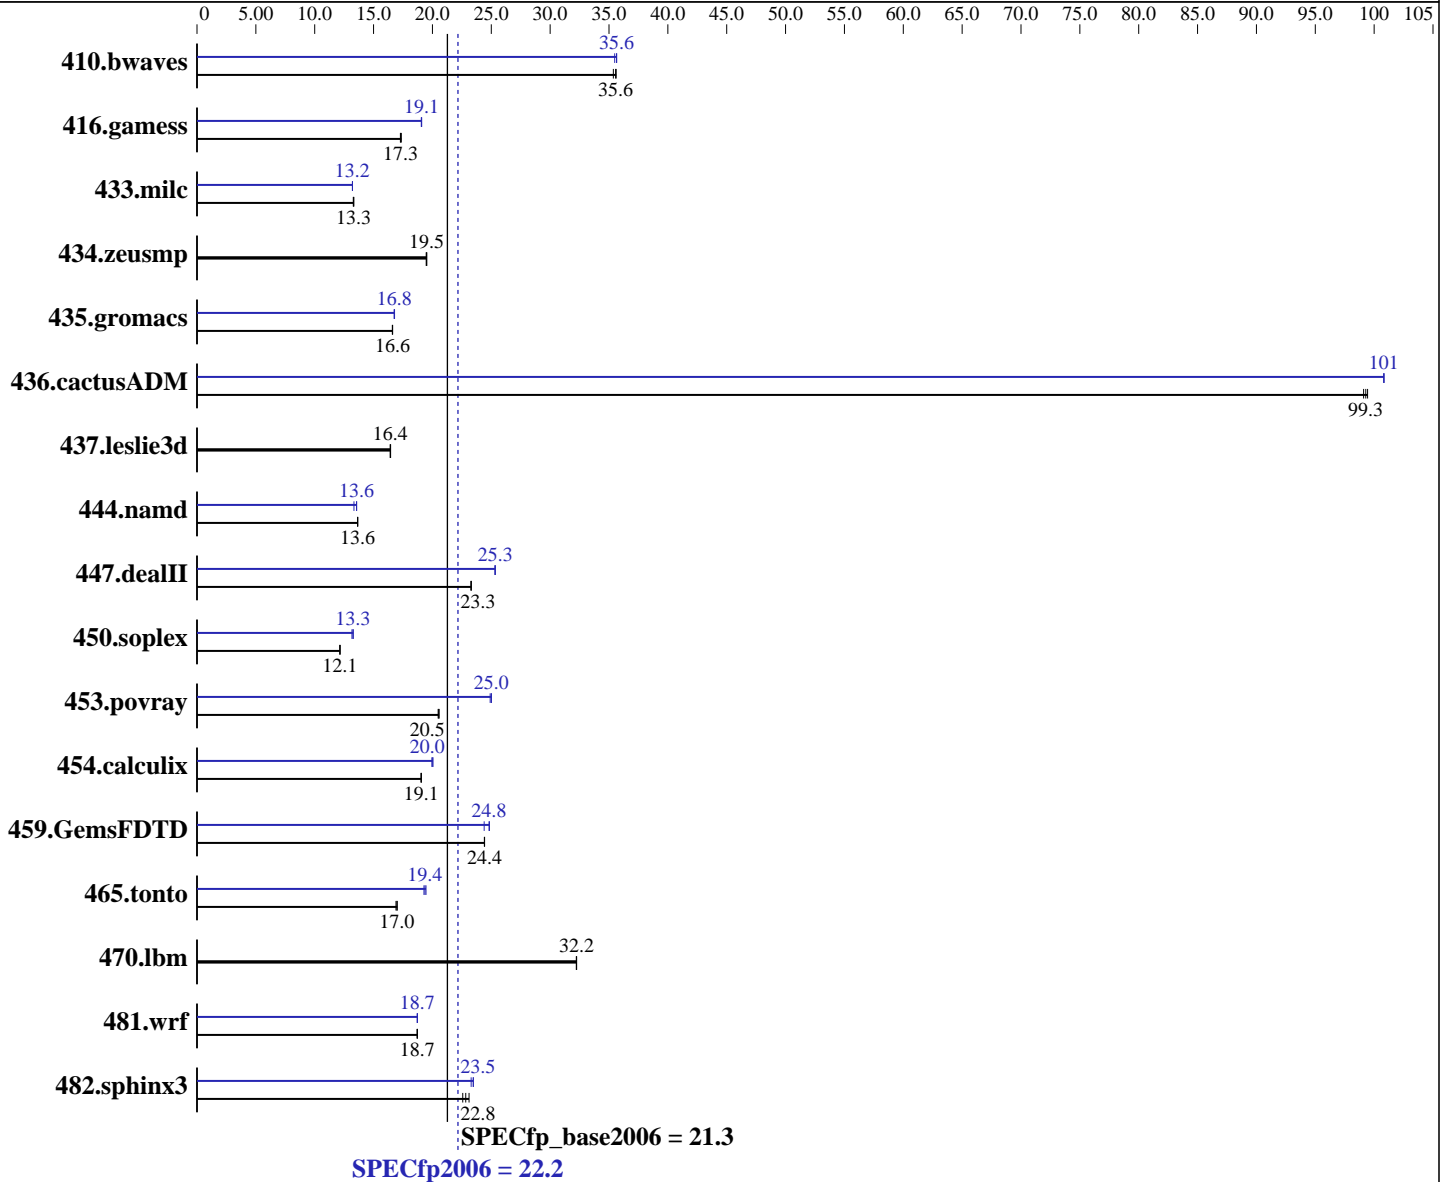

Hardware

CPU Name: Intel Xeon L5420
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10(x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = **22.2**

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECfp_base2006 = **21.3**

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

L3 Cache: None
Other Cache: None
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	384	35.4	382	35.6	382	35.6	381	35.7	381	35.6	383	35.5
416.gamess	1131	17.3	1133	17.3	1128	17.4	1026	19.1	1028	19.1	1026	19.1
433.milc	691	13.3	690	13.3	689	13.3	695	13.2	695	13.2	695	13.2
434.zeusmp	467	19.5	466	19.5	467	19.5	467	19.5	466	19.5	467	19.5
435.gromacs	430	16.6	430	16.6	430	16.6	425	16.8	426	16.8	426	16.8
436.cactusADM	120	99.4	120	99.3	121	99.1	119	101	119	101	119	101
437.leslie3d	572	16.4	572	16.4	573	16.4	572	16.4	572	16.4	573	16.4
444.namd	587	13.7	588	13.6	588	13.6	601	13.3	591	13.6	592	13.6
447.dealII	491	23.3	491	23.3	491	23.3	452	25.3	452	25.3	452	25.3
450.soplex	687	12.1	687	12.1	687	12.1	634	13.2	628	13.3	629	13.3
453.povray	259	20.5	259	20.6	260	20.5	213	25.0	214	24.9	213	25.0
454.calculix	433	19.1	433	19.1	433	19.0	412	20.0	414	20.0	412	20.0
459.GemsFDTD	435	24.4	434	24.4	434	24.4	427	24.8	435	24.4	428	24.8
465.tonto	579	17.0	579	17.0	582	16.9	506	19.5	510	19.3	508	19.4
470.lbm	426	32.2	426	32.2	426	32.3	426	32.2	426	32.2	426	32.3
481.wrf	597	18.7	597	18.7	597	18.7	597	18.7	597	18.7	597	18.7
482.sphinx3	863	22.6	843	23.1	854	22.8	830	23.5	830	23.5	837	23.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Hardware Sector Prefetch Enable and Adjacent Sector Prefetch Enable
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 22.2

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECfp_base2006 = 21.3

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 22.2

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECfp_base2006 = 21.3

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Compiler Invocation (Continued)

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -fno-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 22.2

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECfp_base2006 = 21.3

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-
-opt-prefetch

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -ansi-alias
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch
-parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -opt-prefetch -parallel
-auto-ilp32

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.18.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.18.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 22.2

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECfp_base2006 = 21.3

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Apr-2009

Hardware Availability: Nov-2008

Software Availability: Feb-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:38:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2009.