



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 119

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECint_rate_base2006 = 117

CPU2006 license: 11


Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

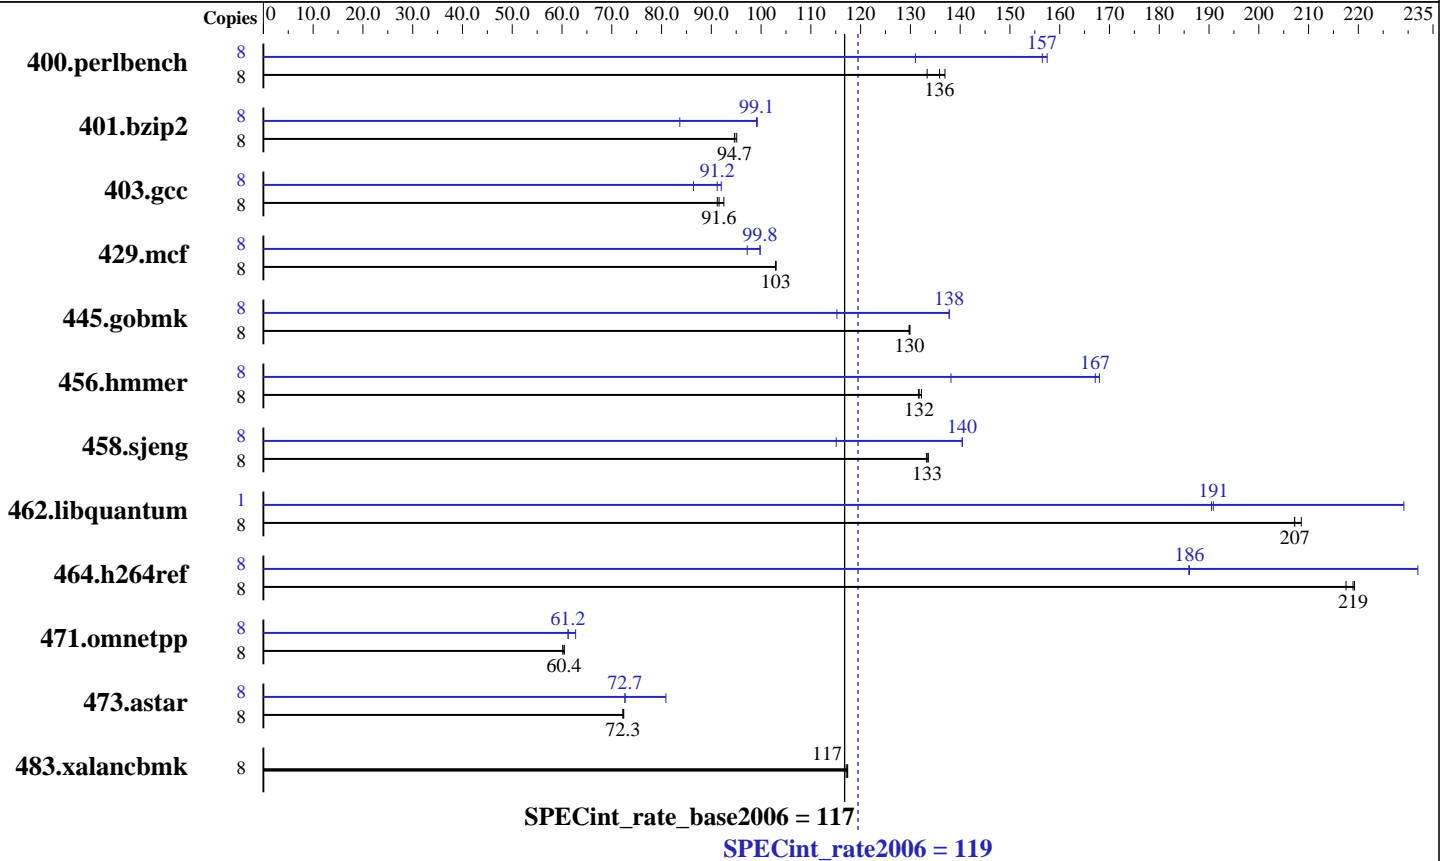

Hardware

CPU Name: Intel Xeon L5420
 CPU Characteristics: 1333MHz system bus
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10(x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 119

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECint_rate_base2006 = 117

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	586	133	<u>575</u>	<u>136</u>	571	137	8	<u>499</u>	<u>157</u>	496	157	597	131
401.bzip2	8	812	95.1	<u>815</u>	<u>94.7</u>	816	94.6	8	<u>779</u>	<u>99.1</u>	778	99.2	923	83.7
403.gcc	8	696	92.5	706	91.2	<u>703</u>	<u>91.6</u>	8	<u>706</u>	<u>91.2</u>	700	92.0	745	86.4
429.mcf	8	708	103	<u>709</u>	<u>103</u>	709	103	8	<u>731</u>	<u>99.8</u>	731	99.8	751	97.2
445.gobmk	8	<u>646</u>	<u>130</u>	646	130	647	130	8	<u>609</u>	<u>138</u>	609	138	728	115
456.hammer	8	565	132	<u>566</u>	<u>132</u>	567	132	8	444	168	<u>447</u>	<u>167</u>	540	138
458.sjeng	8	727	133	725	134	<u>726</u>	<u>133</u>	8	689	140	<u>690</u>	<u>140</u>	841	115
462.libquantum	8	<u>800</u>	<u>207</u>	795	209	800	207	1	90.4	229	<u>109</u>	<u>191</u>	109	190
464.h264ref	8	808	219	814	218	<u>809</u>	<u>219</u>	8	763	232	952	186	<u>951</u>	<u>186</u>
471.omnetpp	8	832	60.1	<u>827</u>	<u>60.4</u>	827	60.4	8	797	62.7	<u>817</u>	<u>61.2</u>	817	61.2
473.astar	8	777	72.2	<u>777</u>	<u>72.3</u>	776	72.4	8	694	80.9	773	72.7	<u>773</u>	<u>72.7</u>
483.xalancbmk	8	<u>471</u>	<u>117</u>	471	117	470	117	8	<u>471</u>	<u>117</u>	471	117	470	117

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

```

taskset was used to bind processes to cores except
for 462.libquantum peak
Hardware Sector Prefetch Enable and Adjacent Sector Prefetch Disable
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 119

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECint_rate_base2006 = 117

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 119

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECint_rate_base2006 = 117

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 119

IBM System x iDataPlex dx360 (Intel Xeon L5420)

SPECint_rate_base2006 = 117

CPU2006 license: 11

Test date: Apr-2009

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Feb-2009

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.17.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.17.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:43:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2009.