



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

**SPECint\_rate2006 = 40.4**

Intel DQ45CB motherboard (Intel Core 2 Duo E7600)

**SPECint\_rate\_base2006 = 38.8**

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

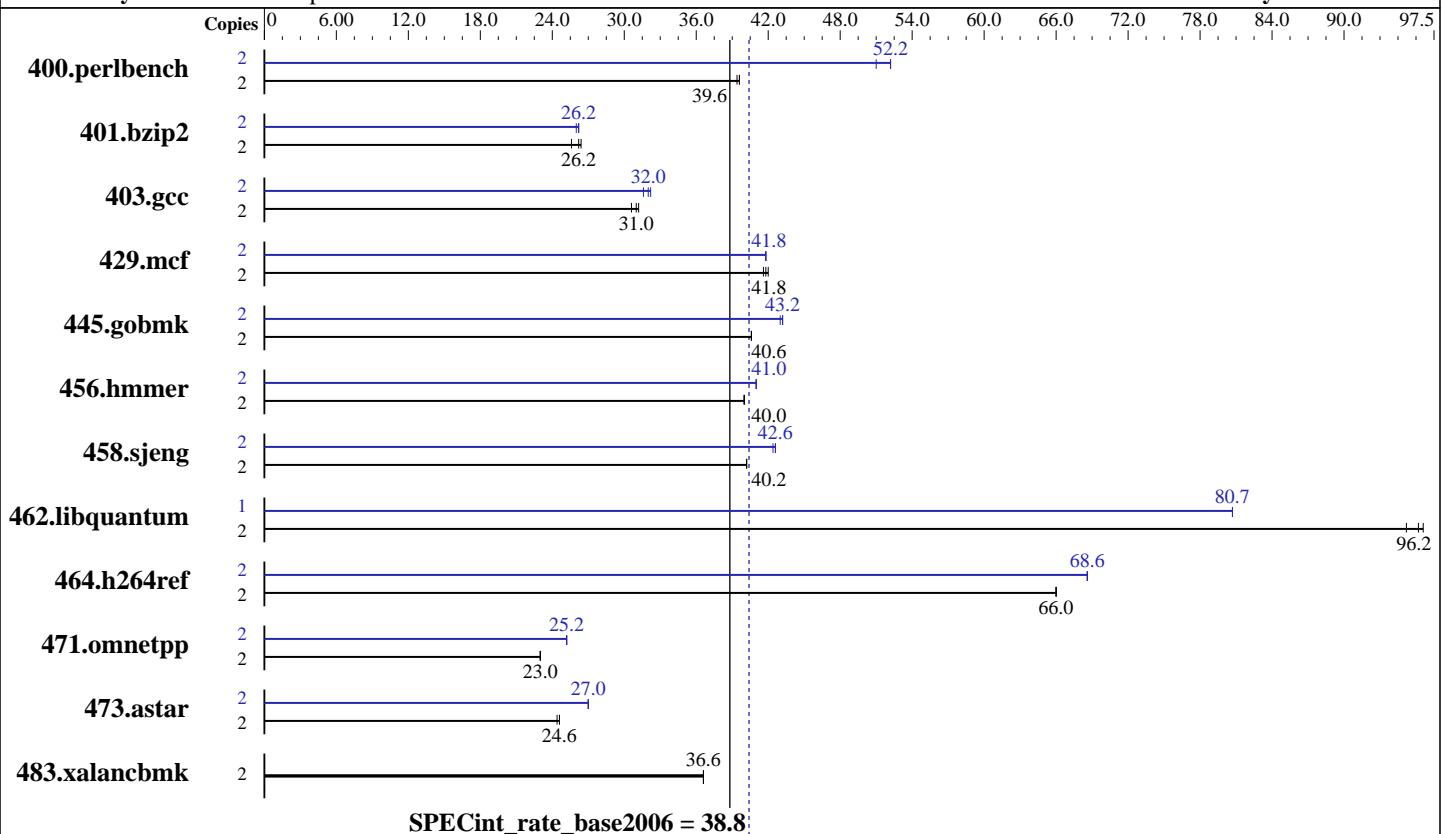

### Hardware

CPU Name: Intel Core 2 Duo E7600  
CPU Characteristics:  
CPU MHz: 3066  
FPU: Integrated  
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 3 MB I+D on chip per chip  
L3 Cache: None  
Other Cache: None  
Memory: 4 GB (4x1GB DDR2-800 CL5)  
Disk Subsystem: Seagate 320 GB SATA, 7200RPM  
Other Hardware: None

### Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)  
Compiler: Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w\_cproc\_p\_11.0.054 Microsoft Visual Studio 2008 (for libraries)  
Auto Parallel: Yes  
File System: NTFS  
System State: Default  
Base Pointers: 32-bit  
Peak Pointers: 32-bit  
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

**SPECint\_rate2006 = 40.4**

Intel DQ45CB motherboard (Intel Core 2 Duo E7600)

**SPECint\_rate\_base2006 = 38.8**

CPU2006 license: 13

Test date: Apr-2009

Test sponsor: Intel Corporation

Hardware Availability: May-2009

Tested by: Intel Corporation

Software Availability: Nov-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	495	39.4	<b>494</b>	<b>39.6</b>	493	39.6	2	383	51.0	374	52.2	<b>374</b>	<b>52.2</b>
401.bzip2	2	753	25.6	<b>738</b>	<b>26.2</b>	733	26.4	2	744	26.0	738	26.2	<b>739</b>	<b>26.2</b>
403.gcc	2	525	30.6	515	31.2	<b>519</b>	<b>31.0</b>	2	509	31.6	499	32.2	<b>504</b>	<b>32.0</b>
429.mcf	2	440	41.6	<b>436</b>	<b>41.8</b>	434	42.0	2	437	41.8	437	41.8	<b>437</b>	<b>41.8</b>
445.gobmk	2	518	40.6	517	40.6	<b>517</b>	<b>40.6</b>	2	487	43.0	<b>486</b>	<b>43.2</b>	486	43.2
456.hammer	2	467	40.0	467	40.0	<b>467</b>	<b>40.0</b>	2	455	41.0	455	41.0	<b>455</b>	<b>41.0</b>
458.sjeng	2	602	40.2	<b>601</b>	<b>40.2</b>	601	40.2	2	569	42.6	<b>569</b>	<b>42.6</b>	570	42.4
462.libquantum	2	435	95.2	<b>431</b>	<b>96.2</b>	429	96.6	1	257	80.7	257	80.7	<b>257</b>	<b>80.7</b>
464.h264ref	2	671	66.0	<b>671</b>	<b>66.0</b>	671	66.0	2	646	<b>68.6</b>	646	68.6	646	68.6
471.omnetpp	2	542	23.0	542	23.0	<b>542</b>	<b>23.0</b>	2	497	25.2	<b>498</b>	<b>25.2</b>	498	25.2
473.astar	2	575	24.4	573	24.6	<b>573</b>	<b>24.6</b>	2	522	27.0	520	27.0	<b>521</b>	<b>27.0</b>
483.xalancbmk	2	<b>377</b>	<b>36.6</b>	377	36.6	377	36.6	2	<b>377</b>	<b>36.6</b>	377	36.6	<b>377</b>	36.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## General Notes

Tested systems can be used with Shin-G ATX case,  
 Antec Truepower Trio power supply TP3-650  
 Binaries were built on Windows Vista Ultimate (32-bit)  
 Binaries were built on Windows Vista Ultimate (32-bit)  
 OMP\_NUM\_THREADS set to number of logical processors as seen by the OS  
 KMP\_AFFINITY set to physical,0  
 submit disabled for 462.libquantum peak

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qc99
```

C++ benchmarks:

```
icl -Qvc9
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

Intel DQ45CB motherboard (Intel Core 2 Duo E7600)

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

**SPECint\_rate2006 = 40.4**

**SPECint\_rate\_base2006 = 38.8**

Test date: Apr-2009

Hardware Availability: May-2009

Software Availability: Nov-2008

## Base Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp, --no\_wchar\_t\_keyword

## Base Optimization Flags

C benchmarks:

-QxSSSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxSSSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

## Peak Portability Flags

403.gcc: -DSPEC\_CPU\_WIN32  
464.h264ref: -DSPEC\_CPU\_NO\_INTTYPES -DWIN32  
483.xalancbmk: -Qoption,cpp, --no\_wchar\_t\_keyword

## Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSSE3(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Intel Corporation**

**SPECint\_rate2006 = 40.4**

Intel DQ45CB motherboard (Intel Core 2 Duo E7600)

**SPECint\_rate\_base2006 = 38.8**

**CPU2006 license:** 13

**Test date:** Apr-2009

**Test sponsor:** Intel Corporation

**Hardware Availability:** May-2009

**Tested by:** Intel Corporation

**Software Availability:** Nov-2008

## Peak Optimization Flags (Continued)

401.bzip2: -QxSSSE3(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
           -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
           /F512000000

403.gcc: -QxSSSE3(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
           -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
           /F512000000

445.gobmk: -QxSSSE3 -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O2  
           -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -QxSSSE3 -Qprof\_gen(pass 1) -Qprof\_use(pass 2) -Qipo -O3  
           -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

458.sjeng: -QxSSSE3(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
           -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: -QxSSSE3 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel  
           -Qpar-runtime-control -Qvec-guard-write /F512000000

464.h264ref: Same as 456.hmmr

C++ benchmarks:

471.omnetpp: -QxSSSE3(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
           -Qipo -O3 -Qprec-div- -Qansi-alias  
           -Qopt-ra-region-strategy=block /F512000000 shlw32m.lib  
           -link /FORCE:MULTIPLE

473.astar: -QxSSSE3(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
           -Qipo -O3 -Qprec-div- -Qansi-alias  
           -Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib  
           -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

**SPECint\_rate2006 = 40.4**

Intel DQ45CB motherboard (Intel Core 2 Duo E7600)

**SPECint\_rate\_base2006 = 38.8**

**CPU2006 license:** 13

**Test date:** Apr-2009

**Test sponsor:** Intel Corporation

**Hardware Availability:** May-2009

**Tested by:** Intel Corporation

**Software Availability:** Nov-2008

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:24:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 June 2009.