



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X3 720)

SPECfp[®]_rate2006 = 33.7

SPECfp_rate_base2006 = 33.0

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

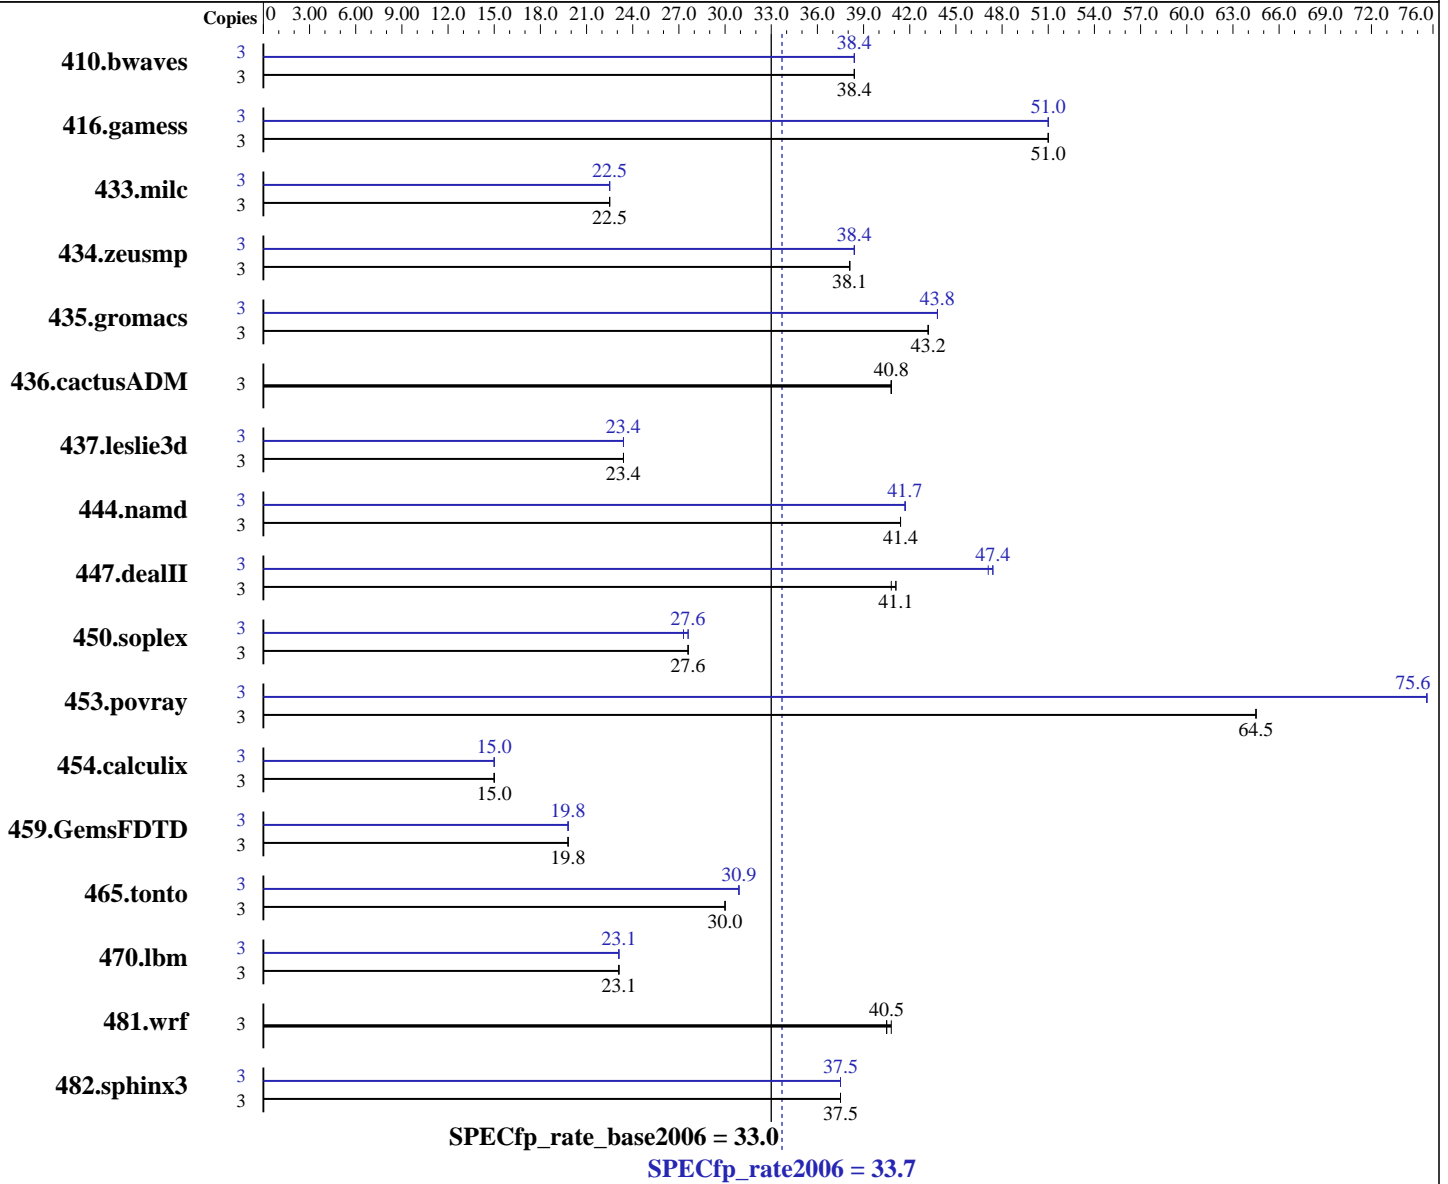

Hardware

CPU Name: AMD Phenom II X3 720
 CPU Characteristics:
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 3 cores, 1 chip, 3 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X3 720)

SPECfp_rate2006 = 33.7

SPECfp_rate_base2006 = 33.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem: Seagate 320 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	3	1061	38.4	1059	38.4	1060	38.4	3	1059	38.4	1059	38.4	1061	38.4
416.gamess	3	1153	51.0	1152	51.0	1152	51.0	3	1155	51.0	1154	51.0	1154	51.0
433.milc	3	1222	22.5	1220	22.5	1222	22.5	3	1222	22.5	1222	22.5	1220	22.5
434.zeusmp	3	718	38.1	716	38.1	717	38.1	3	713	38.4	713	38.4	712	38.4
435.gromacs	3	495	43.2	495	43.2	495	43.2	3	488	43.8	488	43.8	488	43.8
436.cactusADM	3	882	40.8	881	40.8	882	40.8	3	882	40.8	881	40.8	882	40.8
437.leslie3d	3	1208	23.4	1208	23.4	1208	23.4	3	1207	23.4	1208	23.4	1207	23.4
444.namd	3	581	41.4	581	41.4	581	41.4	3	577	41.7	577	41.7	577	41.7
447.dealII	3	839	40.8	835	41.1	835	41.1	3	727	47.1	725	47.4	725	47.4
450.soplex	3	910	27.6	910	27.6	910	27.6	3	911	27.6	912	27.3	911	27.6
453.povray	3	248	64.5	248	64.5	248	64.5	3	211	75.6	211	75.6	211	75.6
454.calculix	3	1641	15.0	1641	15.0	1641	15.0	3	1641	15.0	1641	15.0	1641	15.0
459.GemsFDTD	3	1605	19.8	1604	19.8	1604	19.8	3	1605	19.8	1606	19.8	1606	19.8
465.tonto	3	985	30.0	988	30.0	987	30.0	3	955	30.9	956	30.9	957	30.9
470.lbm	3	1795	23.1	1796	23.1	1795	23.1	3	1795	23.1	1795	23.1	1795	23.1
481.wrf	3	830	40.5	824	40.8	830	40.5	3	830	40.5	824	40.8	830	40.5
482.sphinx3	3	1556	37.5	1557	37.5	1554	37.5	3	1555	37.5	1555	37.5	1559	37.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Binaries were built on Windows Vista Ultimate (32-bit)

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X3 720)

SPECfp_rate2006 = 33.7

SPECfp_rate_base2006 = 33.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

C++ benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F1000000000 shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Benchmarks using both Fortran and C:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X3 720)

SPECfp_rate2006 = 33.7

SPECfp_rate_base2006 = 33.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F1000000000

482.sphinx3: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom II X3 720)

SPECfp_rate2006 = 33.7

SPECfp_rate_base2006 = 33.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: May-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

410.bwaves: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

416.gamess: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep- /F1000000000

434.zeusmp: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- /F1000000000

437.leslie3d: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

459.GemsFDTD: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch /F1000000000

465.tonto: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: basepeak = yes

454.calculix: /arch:SSE2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 01:17:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 June 2009.