



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X3 8750)

SPECfp®2006 = 14.2

SPECfp_base2006 = 14.0

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

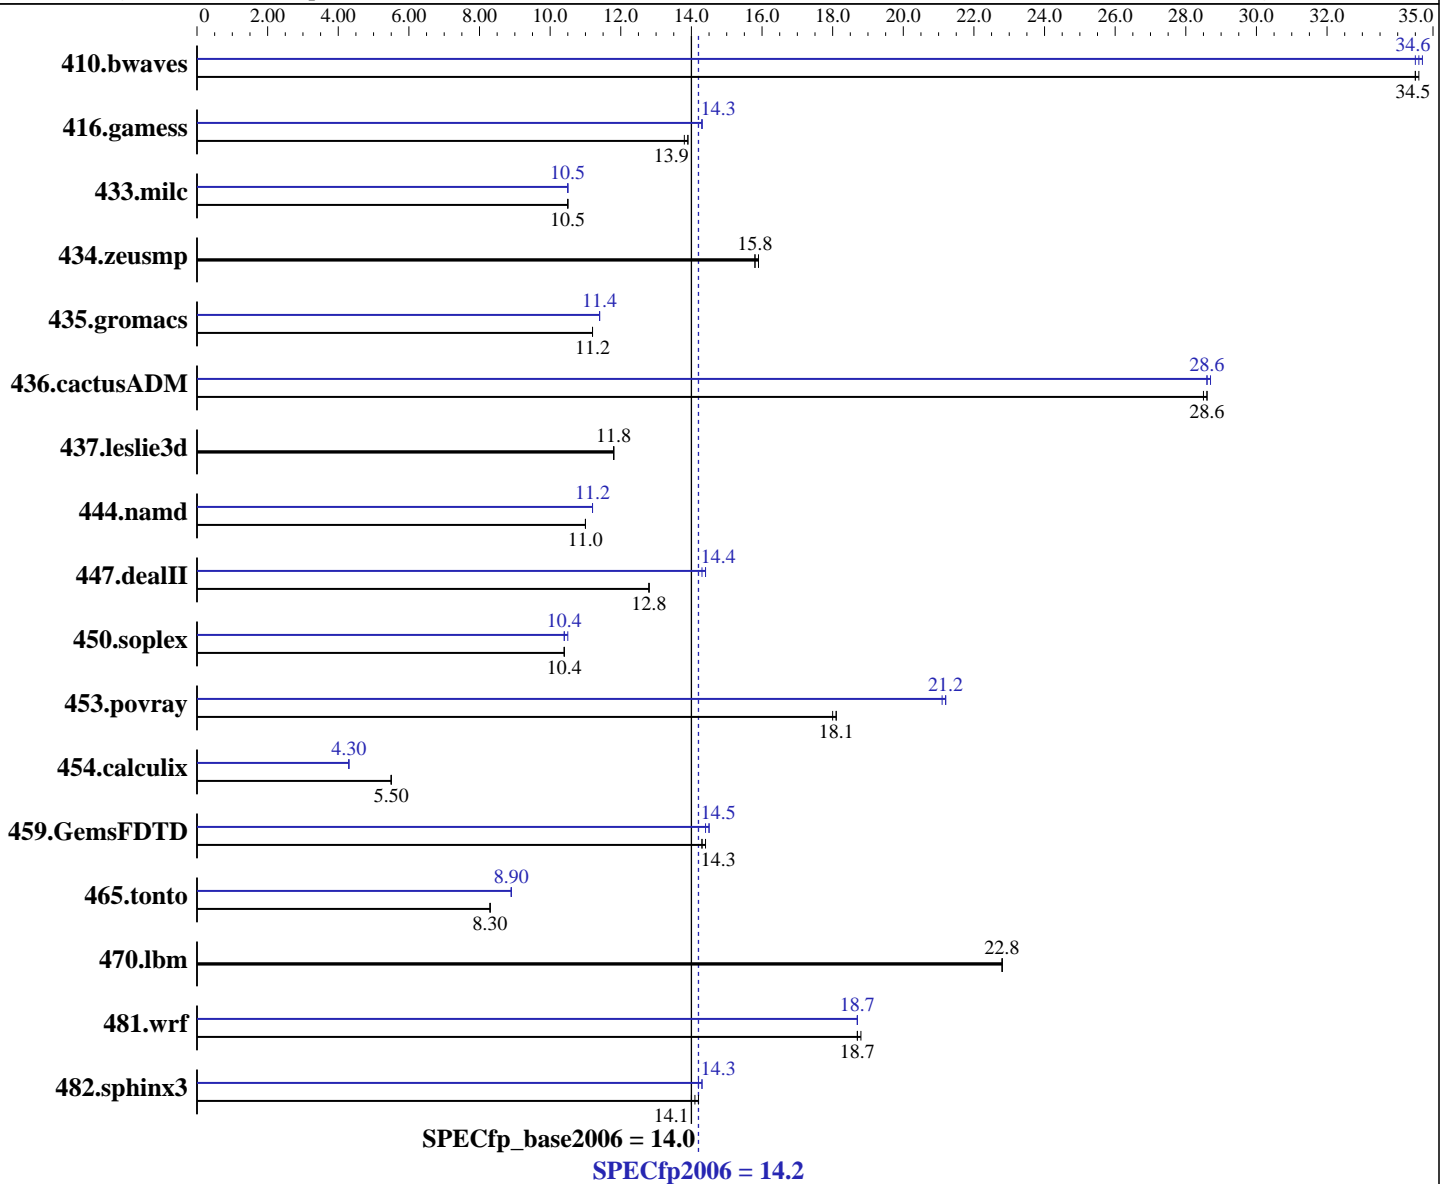

Hardware

CPU Name: AMD Phenom X3 8750
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 3 cores, 1 chip, 3 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X3 8750)

SPECfp2006 = 14.2

SPECfp_base2006 = 14.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (4x1GB DDR2-800 CL5)
Disk Subsystem: Seagate 320 GB SATA, 7200RPM
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	393	34.6	394	34.5	394	34.5	394	34.5	392	34.7	393	34.6
416.gamess	1415	13.8	1413	13.9	1410	13.9	1370	14.3	1372	14.3	1370	14.3
433.milc	871	10.5	871	10.5	871	10.5	875	10.5	875	10.5	875	10.5
434.zeusmp	575	15.8	577	15.8	573	15.9	575	15.8	577	15.8	573	15.9
435.gromacs	638	11.2	638	11.2	638	11.2	627	11.4	627	11.4	627	11.4
436.cactusADM	419	28.5	417	28.6	417	28.6	417	28.6	417	28.7	417	28.6
437.leslie3d	797	11.8	798	11.8	797	11.8	797	11.8	798	11.8	797	11.8
444.namd	728	11.0	727	11.0	726	11.0	713	11.2	715	11.2	713	11.2
447.dealII	897	12.8	894	12.8	896	12.8	795	14.4	798	14.3	794	14.4
450.soplex	803	10.4	802	10.4	803	10.4	798	10.5	798	10.4	800	10.4
453.povray	295	18.1	294	18.1	295	18.0	251	21.2	251	21.2	252	21.1
454.calculix	1511	5.50	1511	5.50	1512	5.50	1915	4.30	1915	4.30	1914	4.30
459.GemsFDTD	742	14.3	740	14.3	739	14.4	733	14.5	733	14.5	735	14.4
465.tonto	1188	8.30	1188	8.30	1180	8.30	1110	8.90	1110	8.90	1106	8.90
470.lbm	603	22.8	603	22.8	603	22.8	603	22.8	603	22.8	603	22.8
481.wrf	598	18.7	595	18.8	596	18.7	597	18.7	598	18.7	598	18.7
482.sphinx3	1371	14.2	1379	14.1	1392	14.0	1368	14.2	1366	14.3	1367	14.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply
Binaries were built on Windows Vista Ultimate (32-bit)
OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99

C++ benchmarks:
icl -Qvc9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X3 8750)

SPECfp2006 = 14.2

SPECfp_base2006 = 14.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore

444.namd: -TP

447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG

453.povray: -DSPEC_CPU_WINDOWS_ICL

454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase

481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch

/F1000000000

C++ benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch

-Qcxx-features /F1000000000 shlw32m.lib

-link /FORCE:MULTIPLE

Fortran benchmarks:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch

/F1000000000

Benchmarks using both Fortran and C:

/arch:SSE2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch

/F1000000000

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qc99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X3 8750)

SPECfp2006 = 14.2

SPECfp_base2006 = 14.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: basepeak = yes

482.sphinx3: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch
-Qansi-alias -Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qparallel /F1000000000

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

GIGA-BYTE Technology Co. Ltd.

(Test Sponsor: Intel Corporation)

Gigabyte MA78GM-S2H Motherboard (AMD Phenom X3 8750)

SPECfp2006 = 14.2

SPECfp_base2006 = 14.0

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2009

Hardware Availability: Apr-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

416.gamess: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch
-Qparallel /F1000000000

465.tonto: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: /arch:SSE2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel
/F1000000000

454.calculix: /arch:SSE2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: /arch:SSE2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qparallel /F1000000000

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:00:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 23 June 2009.