



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

**SPECfp®\_rate2006 = Not Run**

**Sun Blade 6048 Chassis (48 x X6440 Blades)**

**SPECfp\_rate\_base2006 = 6500**

**CPU2006 license: 6**


**Test date:** Jun-2009

**Test sponsor:** Sun Microsystems

**Hardware Availability:** Jan-2009

**Tested by:** Sun Microsystems

**Software Availability:** Jun-2009

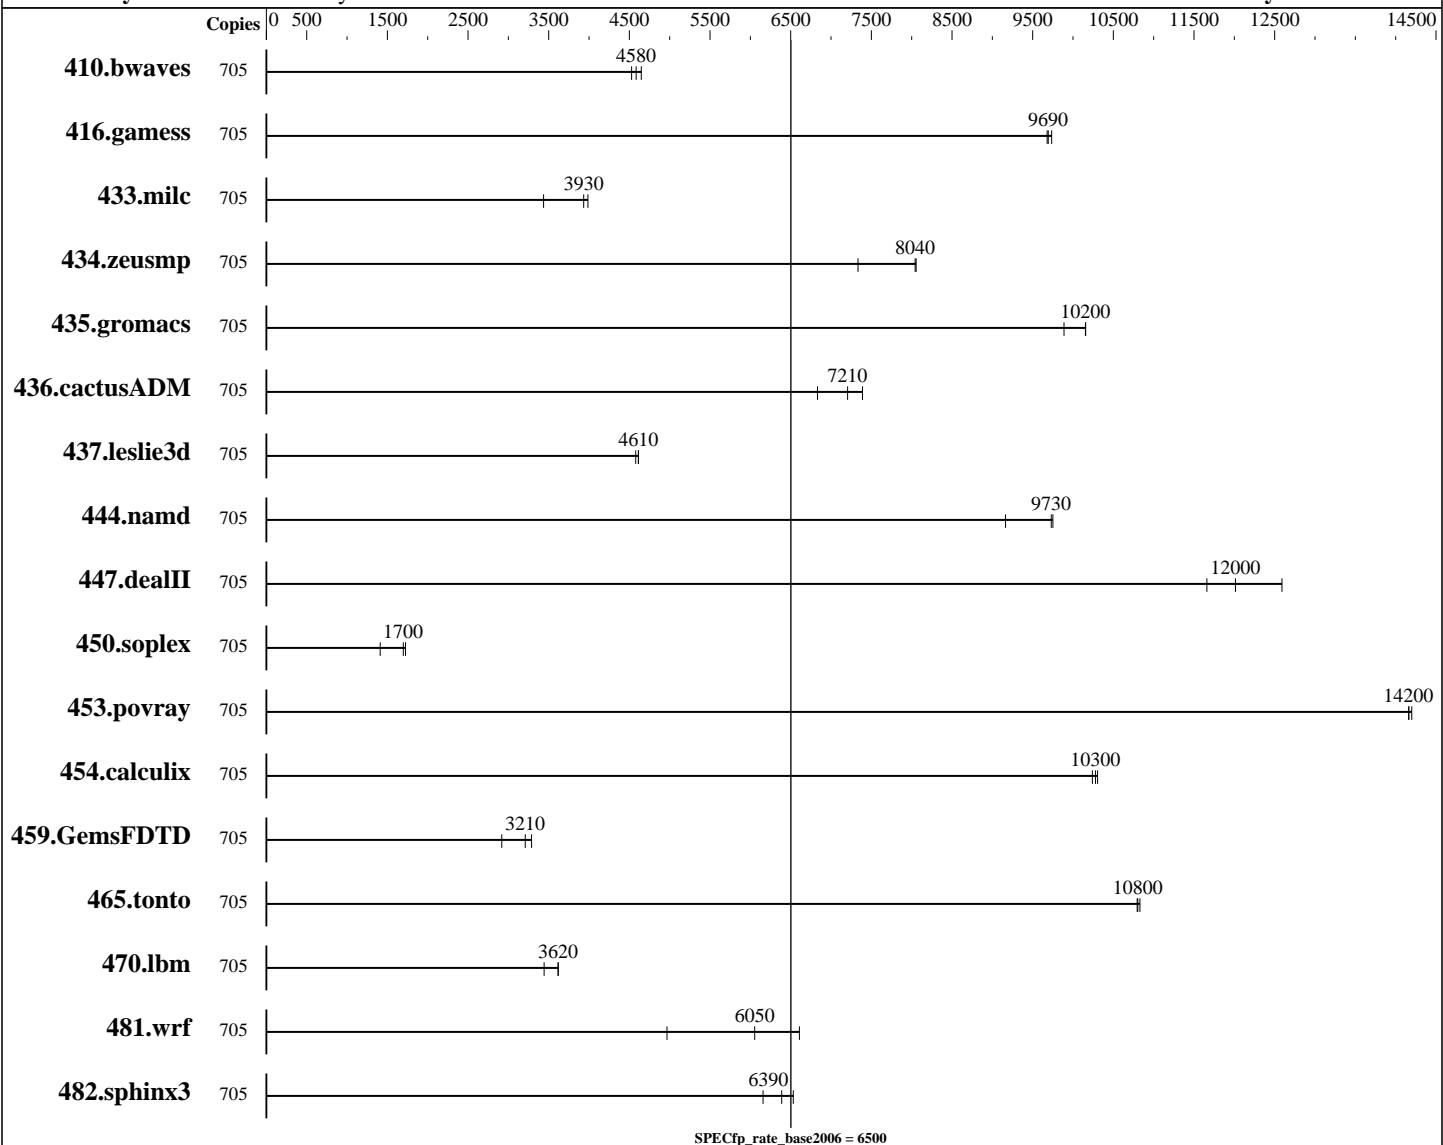

## Hardware

CPU Name: AMD Opteron 8384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 768 cores, 192 chips, 4 cores/chip  
 CPU(s) orderable: 4 to 192 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

## Software

Operating System: OpenSolaris 2008.11  
 Compiler: Sun Studio 12 Update 1  
 Auto Parallel: No  
 File System: NFSv3  
 System State: Default  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other Software: Apache C++ Standard Library V4.2.1

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

Sun Blade 6048 Chassis (48 x X6440 Blades)

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 6500**

**CPU2006 license:** 6

**Test date:** Jun-2009

**Test sponsor:** Sun Microsystems

**Hardware Availability:** Jan-2009

**Tested by:** Sun Microsystems

**Software Availability:** Jun-2009

L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 1536 GB (16\*2GB DDR2-667 CL5 ECC Reg per blade)  
 Disk Subsystem: 48 x 250GB 7200RPM SATA via NFS  
 Other Hardware: See additional details below

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	705	2061	4650	2116	4530	<b>2090</b>	<b>4580</b>							
416.gamess	705	<b>1424</b>	<b>9690</b>	1418	9740	1426	9680							
433.milc	705	<b>1645</b>	<b>3930</b>	1883	3440	1624	3990							
434.zeusmp	705	<b>798</b>	<b>8040</b>	875	7330	796	8060							
435.gromacs	705	509	9890	<b>496</b>	<b>10200</b>	496	10200							
436.cactusADM	705	1140	7390	1233	6830	<b>1169</b>	<b>7210</b>							
437.leslie3d	705	1447	4580	<b>1437</b>	<b>4610</b>	1437	4610							
444.namd	705	617	9160	<b>581</b>	<b>9730</b>	580	9750							
447.dealII	705	<b>671</b>	<b>12000</b>	692	11700	641	12600							
450.soplex	705	4167	1410	3409	1720	<b>3464</b>	<b>1700</b>							
453.povray	705	<b>265</b>	<b>14200</b>	264	14200	265	14200							
454.calculix	705	564	10300	<b>566</b>	<b>10300</b>	568	10200							
459.GemsFDTD	705	2563	2920	<b>2331</b>	<b>3210</b>	2275	3290							
465.tonto	705	643	10800	<b>642</b>	<b>10800</b>	641	10800							
470.lbm	705	2813	3440	2677	3620	<b>2679</b>	<b>3620</b>							
481.wrf	705	1586	4970	<b>1301</b>	<b>6050</b>	1192	6610							
482.sphinx3	705	2231	6160	<b>2151</b>	<b>6390</b>	2103	6530							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

The Apache C++ Standard Library V4.2.1 was installed from <http://stdcxx.apache.org/download.html> using:

```
alias gmake=specmake
gmake BUILDTYPE=8D CONFIG=sunpro.config
```

## Submit Notes

The config file option 'submit' was used, along with submit.pl to distribute jobs to all Sun Blade X6440 server modules.  
 It also uses 'pbind' to bind processes to cores.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

**Sun Blade 6048 Chassis (48 x X6440 Blades)**

**SPECfp\_rate2006 = Not Run**

**CPU2006 license:** 6

**Test date:** Jun-2009

**Test sponsor:** Sun Microsystems

**Hardware Availability:** Jan-2009

**Tested by:** Sun Microsystems

**Software Availability:** Jun-2009

## Operating System Notes

```
ulimit -s 131072 (shell): increases stack
/etc/system parameters on all nodes
tune_t_fsflushr=10
autopt=900
set lpg_alloc_prefer=1
The following /etc/system settings were changed on the node that was running runcspec:
set maxusers=2048
set rlim_fd_cur=1000
```

## Platform Notes

Sun Blade 6048 Chassis may be ordered with up to 48 Sun Blade server modules. Test configuration contains 48 Sun Blade X6440 server modules. Each Sun Blade X6440 server modules has 4 chips.

Default BIOS settings used.

## General Notes

447.dealII (base): "apache\_stdcxx\_4\_2\_1" src.alt was used.

The NFS server used was a Sun Fire X4540 containing 48 x 250GB 7200RPM SATA disks. Connections to the clients were via gigabit ethernet.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Benchmarks using both Fortran and C:

cc f90

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

Sun Blade 6048 Chassis (48 x X6440 Blades)

**SPECfp\_rate2006 = Not Run**

**CPU2006 license:** 6

**Test sponsor:** Sun Microsystems

**Tested by:** Sun Microsystems

**Test date:** Jun-2009

**Hardware Availability:** Jan-2009

**Software Availability:** Jun-2009

## Base Portability Flags (Continued)

```
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_WORDS_LITTLEENDIAN
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-fast -xipo=2 -m64 -xpagesize=2M -xalias_level=std
```

C++ benchmarks:

```
-fast -xipo=2 -m64 -xppagesize=2M -xalias_level=compatible
-library=no%Cstd -I/data1/stdcxx-4.2.1/include
-I/data1/stdcxx-4.2.1/build/include -L/data1/stdcxx-4.2.1/build/lib
-R/data1/stdcxx-4.2.1/build/lib -lstdc++
```

Fortran benchmarks:

```
-fast -xipo=2 -m64 -xppagesize=2M
```

Benchmarks using both Fortran and C:

```
-fast(cc) -xipo=2 -m64 -xppagesize=2M -xalias_level=std -fast(f90)
```

## Base Other Flags

C benchmarks:

```
-V -# -xjobs=16
```

C++ benchmarks:

```
-verbose=diags,version -xjobs=16
```

Fortran benchmarks:

```
-V -v -xjobs=16
```

Benchmarks using both Fortran and C:

```
-V -# -xjobs=16 -v
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Sun Microsystems**

**Sun Blade 6048 Chassis (48 x X6440 Blades)**

**SPECfp\_rate2006 = Not Run**

**SPECfp\_rate\_base2006 = 6500**

**CPU2006 license:** 6

**Test date:** Jun-2009

**Test sponsor:** Sun Microsystems

**Hardware Availability:** Jan-2009

**Tested by:** Sun Microsystems

**Software Availability:** Jun-2009

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86\\_64.html](http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86_64.html)

<http://www.spec.org/cpu2006/flags/Sun-Blade-6048.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86\\_64.xml](http://www.spec.org/cpu2006/flags/Sun-OpenSolaris-Studio-x86_64.xml)

<http://www.spec.org/cpu2006/flags/Sun-Blade-6048.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 02:28:31 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 July 2009.