



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems Sun Blade T6320

SPECfp®_rate2006 = 68.5

SPECfp_rate_base2006 = 64.1

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jan-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

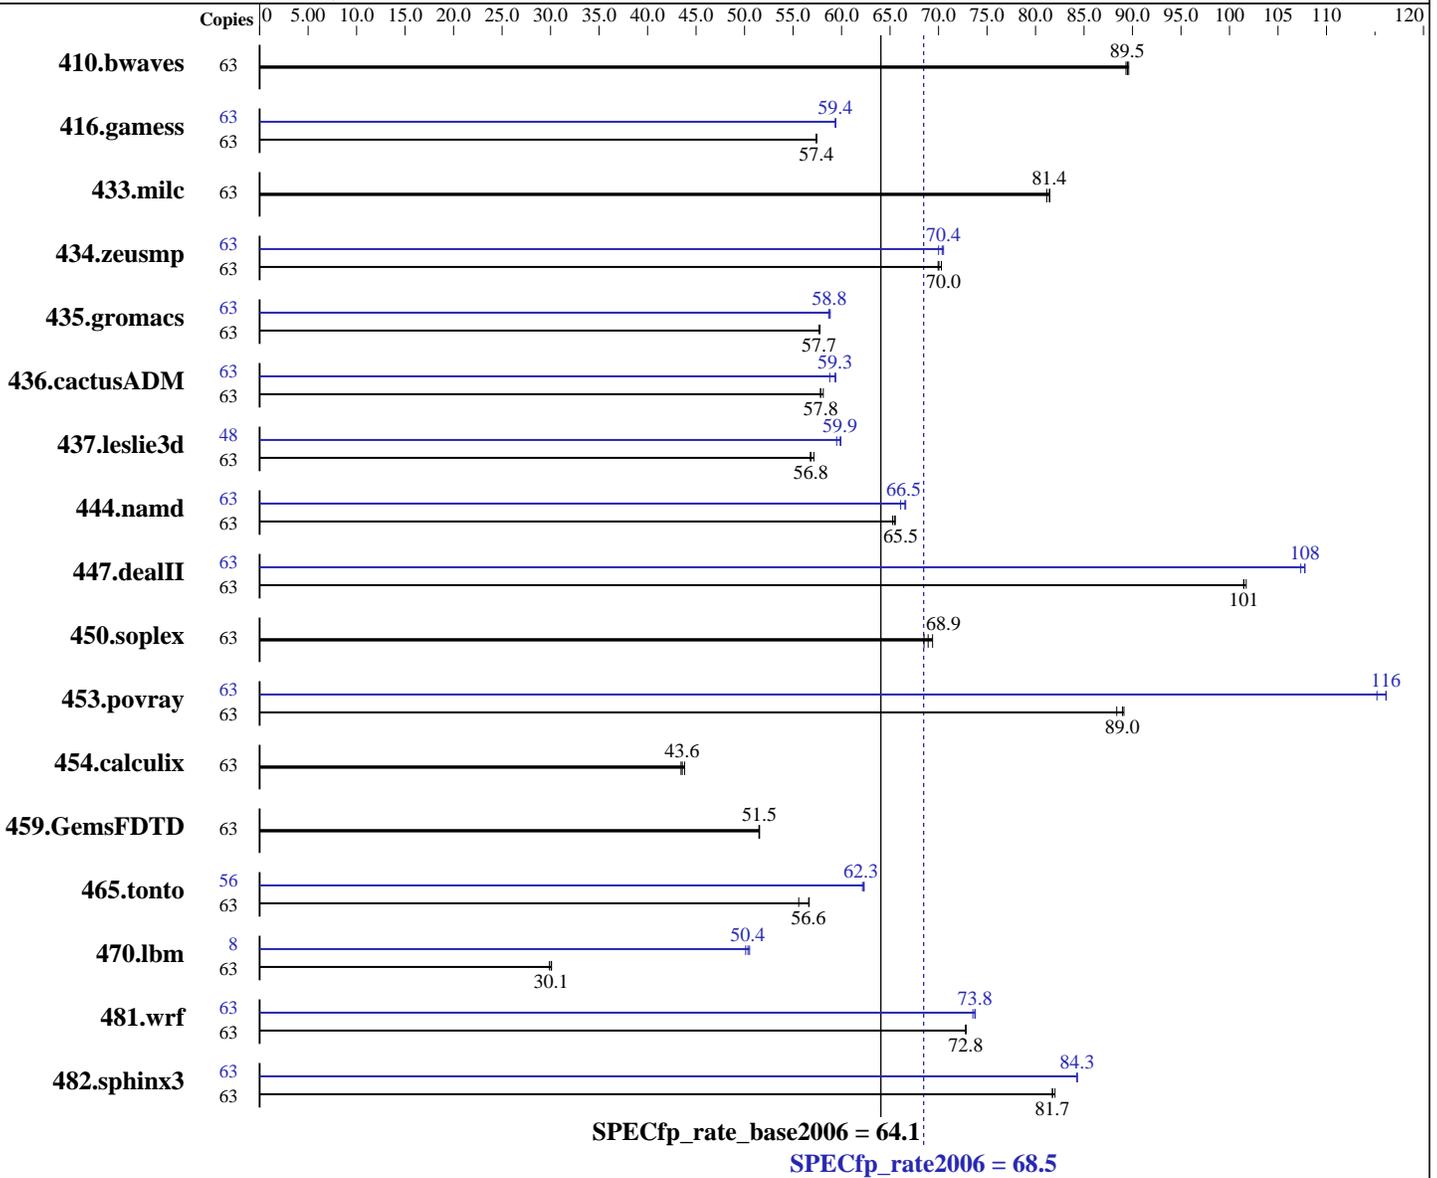

Hardware

CPU Name: UltraSPARC T2
 CPU Characteristics:
 CPU MHz: 1582
 FPU: Integrated
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 8 threads/core
 CPU(s) orderable: 1 chips
 Primary Cache: 16 KB I + 8 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per chip

Continued on next page

Software

Operating System: Solaris 10 10/08
 Compiler: Sun Studio 12 and gccfs V4.2.1
 (see additional detail below)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade T6320

SPECfp_rate2006 = 68.5

SPECfp_rate_base2006 = 64.1

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jan-2009
Hardware Availability: Jul-2009
Software Availability: Nov-2008

L3 Cache: None
Other Cache: None
Memory: 64 GB (16 x 4 GB)
Disk Subsystem: 1 x 146 GB Sun 10K RPM SAS
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	63	9585	89.3	9555	89.6	9569	89.5	63	9585	89.3	9555	89.6	9569	89.5
416.gamess	63	21485	57.4	21483	57.4	21491	57.4	63	20779	59.4	20781	59.4	20767	59.4
433.milc	63	7098	81.5	7104	81.4	7126	81.2	63	7098	81.5	7104	81.4	7126	81.2
434.zeusmp	63	8185	70.0	8195	70.0	8156	70.3	63	8130	70.5	8146	70.4	8190	70.0
435.gromacs	63	7785	57.8	7796	57.7	7798	57.7	63	7667	58.7	7646	58.8	7656	58.8
436.cactusADM	63	12954	58.1	13018	57.8	13014	57.8	63	12675	59.4	12806	58.8	12689	59.3
437.leslie3d	63	10430	56.8	10417	56.8	10362	57.2	48	7584	59.5	7538	59.9	7529	59.9
444.namd	63	7741	65.3	7720	65.5	7709	65.5	63	7645	66.1	7595	66.5	7584	66.6
447.dealII	63	7085	102	7104	101	7101	101	63	6714	107	6688	108	6688	108
450.soplex	63	7623	68.9	7572	69.4	7671	68.5	63	7623	68.9	7572	69.4	7671	68.5
453.povray	63	3761	89.1	3768	89.0	3793	88.4	63	2885	116	2886	116	2909	115
454.calculix	63	11927	43.6	11962	43.5	11862	43.8	63	11927	43.6	11962	43.5	11862	43.8
459.GemsFDTD	63	12967	51.5	12974	51.5	12984	51.5	63	12967	51.5	12974	51.5	12984	51.5
465.tonto	63	10952	56.6	11152	55.6	10940	56.7	56	8842	62.3	8843	62.3	8865	62.2
470.lbm	63	28972	29.9	28759	30.1	28802	30.1	8	2176	50.5	2183	50.4	2194	50.1
481.wrf	63	9664	72.8	9668	72.8	9662	72.8	63	9542	73.8	9570	73.5	9540	73.8
482.sphinx3	63	15022	81.7	15020	81.7	14973	82.0	63	14568	84.3	14568	84.3	14565	84.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at
http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
The tested configuration included patch 124867-08, 124861-09,
124863-08, 127000-06

Peak also uses "GCC for SPARC Systems 4.2.1", which
combines gcc with the Sun Code Generator for SPARC
systems. It is invoked as "gcc", and accepts source
code compatible with GCC 4.2.

For more information, including support, see
<http://cooltools.sunsource.net/gcc/>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade T6320

SPECfp_rate2006 = 68.5

SPECfp_rate_base2006 = 64.1

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jan-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

Submit Notes

A processor set was created using
psrset -c 1-63
and the runspec process was placed into the set using
psrset -e 1
The config file option 'submit' was used to select specific
processors within the set, along with the pbind command.

Operating System Notes

ulimit -s 131072 was used to allow the stack to grow
up to 131072 KB (aka 128 MB). Note that saying "131072"
is preferable to "unlimited", because there is a tradeoff
between space for the stack vs. space for the heap.

/etc/system parameters

autoup=600

Causes pages older than the listed number of seconds to
be written by fsflush.

bufhwm=3000

Memory byte limit for caching I/O buffers

segmap_percent=1

Set maximum percent memory for file system cache

tune_t_fsflushr=10

Controls how many seconds elapse between runs of the
page flush daemon, fsflush.

tsb_rss_factor=128

Suggests that the size of the TSB (Translation Storage Buffer)
may be increased if it is more than 25% (128/512) full. Doing so
may reduce TSB traps, at the cost of additional kernel memory.

The "webconsole" service was turned off using
svcadm disable webconsole

The system had 68 GB of swap space.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Fortran benchmarks:

f90

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade T6320

SPECfp_rate2006 = 68.5

SPECfp_rate_base2006 = 64.1

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jan-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:

```
-g -fast -xipo=2 -xpagesize=4M -xprefetch_level=2 -xalias_level=std
-xprefetch_level=3 -xprefetch_auto_type=indirect_array_access
-M /usr/lib/ld/map.bssalign
```

C++ benchmarks:

```
-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch_level=2
-xdepend -xalias_level=compatible -M /usr/lib/ld/map.bssalign
```

Fortran benchmarks:

```
-g -fast -xipo=2 -xpagesize=4M -xprefetch_level=2
-M /usr/lib/ld/map.bssalign
```

Benchmarks using both Fortran and C:

```
-g -fast(cc) -fast(f90) -xipo=2 -xpagesize=4M -xprefetch_level=2
-xalias_level=std -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access -M /usr/lib/ld/map.bssalign
```

Base Other Flags

C benchmarks:

```
-xjobs=32 -V -#
```

C++ benchmarks:

```
-xjobs=32 -verbose=diags,version
```

Fortran benchmarks:

```
-xjobs=32 -V -v
```

Benchmarks using both Fortran and C:

```
-xjobs=32 -V -# -v
```

Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks (except as noted below):

```
CC
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade T6320

SPECfp_rate2006 = 68.5
SPECfp_rate_base2006 = 64.1

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Jan-2009
Hardware Availability: Jul-2009
Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

447.dealIII: g++

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -xprefetch_level=3 -xipo=2
-xrestrict

482.sphinx3: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -xinline= -xprefetch_level=2
-Wc,-Qlp-ol=1 -xrestrict -xalias_level=strong -fsimple=1
-xlinkopt=2 -lfast

C++ benchmarks:

444.namd: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xdepend -xalias_level=compatible
-M /usr/lib/ld/map.bssalign -xprefetch_level=1 -xlinkopt=2

447.dealIII: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xdepend -Wl,-M,/usr/lib/ld/map.bssalign -xipo=2 -xrestrict
-xalias_level=std

450.soplex: basepeak = yes

453.povray: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=64K
-xdepend -xalias_level=compatible -xipo=2 -xrestrict
-xlinkopt=2

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade T6320

SPECfp_rate2006 = 68.5

SPECfp_rate_base2006 = 64.1

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jan-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

416.gamess: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -xlinkopt=2

434.zeusmp: -g -fast -xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=1
-qoption cg -Qeps:enabled=1 -qoption cg -Qeps:ws=8 -lmopt

437.leslie3d: -g -fast -xpagesize_heap=4M -xpagesize_stack=64K
-M /usr/lib/ld/map.bssalign -xprefetch_level=3
-xprefetch=latx:1.6 -qoption cg -Qlp=1 -qoption cg -Qlp-fa=0
-qoption cg -Qlp-fl=1 -qoption cg -Qlp-av=448
-qoption cg -Qlp-t=4

459.GemsFDTD: basepeak = yes

465.tonto: -g -fast -xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2
-lfast

Benchmarks using both Fortran and C:

435.gromacs: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=1 -xinline=
-xarch=generic -xchip=generic -fsimple=0

436.cactusADM: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2
-fsimple=1 -xlinkopt=2

454.calculix: basepeak = yes

481.wrf: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-xpagesize=4M -M /usr/lib/ld/map.bssalign -xlinkopt=2

Peak Other Flags

C benchmarks:

-xjobs=32 -V -#

C++ benchmarks (except as noted below):

-xjobs=32 -verbose=diags,version

447.dealIII: -v

Fortran benchmarks:

-xjobs=32 -V -v

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade T6320

SPECfp_rate2006 = 68.5

SPECfp_rate_base2006 = 64.1

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Jan-2009

Hardware Availability: Jul-2009

Software Availability: Nov-2008

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

-xjobs=32 -V -# -v

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12ul-and-gccfss4.2.r3.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12ul-and-gccfss4.2.r3.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:14:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.