



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

### SPECfp<sup>®</sup>\_rate2006 = 204

### Sun Blade X6440 (AMD Opteron 8384 2.7GHz)

### SPECfp\_rate\_base2006 = 183

CPU2006 license: 6


Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

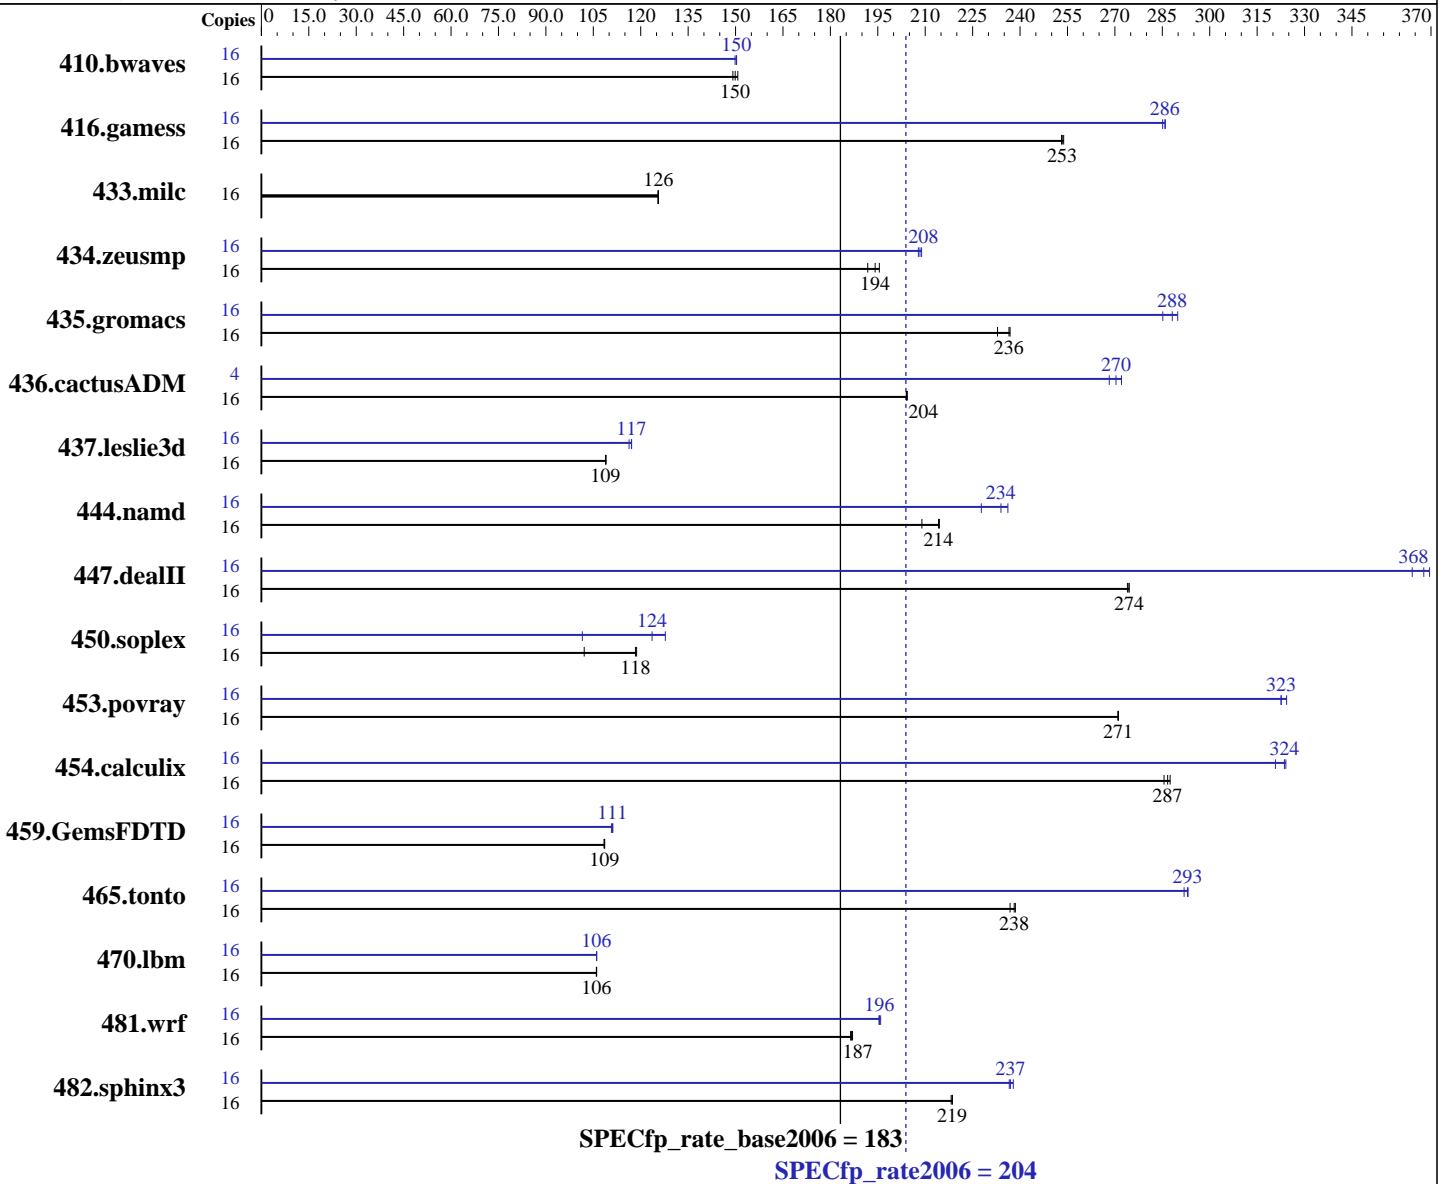

#### Hardware

CPU Name: AMD Opteron 8384  
 CPU Characteristics:  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2 or 4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

#### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5 for x86\_64  
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: NFSv3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

SPECfp\_rate2006 = 204

Sun Blade X6440 (AMD Opteron 8384 2.7GHz)

SPECfp\_rate\_base2006 = 183

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: 1 x 80 GB 10 K RPM SATA via NFS  
 Other Hardware: See additional details below

Other Software: binutils 2.18

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1458	149	<u>1451</u>	<u>150</u>	1443	151	16	1451	150	1446	150	<u>1447</u>	<u>150</u>
416.gamess	16	1238	253	<u>1237</u>	<u>253</u>	1234	254	16	<u>1096</u>	<u>286</u>	1099	285	1096	286
433.milc	16	1169	126	<u>1170</u>	<u>126</u>	1171	125	16	1169	126	<u>1170</u>	<u>126</u>	1171	125
434.zeusmp	16	759	192	745	195	<u>750</u>	<u>194</u>	16	701	208	<u>699</u>	<u>208</u>	697	209
435.gromacs	16	491	233	482	237	<u>483</u>	<u>236</u>	16	401	285	<u>396</u>	<u>288</u>	394	290
436.cactusADM	16	937	204	936	204	<u>937</u>	<u>204</u>	4	<u>177</u>	<u>270</u>	176	272	178	268
437.leslie3d	16	1379	109	1381	109	<u>1381</u>	<u>109</u>	16	<u>1285</u>	<u>117</u>	1284	117	1293	116
444.namd	16	614	209	<u>599</u>	<u>214</u>	598	214	16	563	228	<u>548</u>	<u>234</u>	543	236
447.dealII	16	<u>667</u>	<u>274</u>	668	274	667	274	16	495	370	503	364	<u>498</u>	<u>368</u>
450.soplex	16	1307	102	<u>1128</u>	<u>118</u>	1124	119	16	1314	102	<u>1080</u>	<u>124</u>	1044	128
453.povray	16	314	271	314	271	<u>314</u>	<u>271</u>	16	262	324	264	323	<u>264</u>	<u>323</u>
454.calculix	16	462	286	459	287	<u>460</u>	<u>287</u>	16	<u>408</u>	<u>324</u>	407	324	411	321
459.GemsFDTD	16	1563	109	<u>1564</u>	<u>109</u>	1566	108	16	1533	111	1527	111	<u>1529</u>	<u>111</u>
465.tonto	16	665	237	<u>661</u>	<u>238</u>	660	239	16	<u>537</u>	<u>293</u>	537	293	539	292
470.lbm	16	2074	106	<u>2074</u>	<u>106</u>	2072	106	16	2073	106	2073	106	<u>2073</u>	<u>106</u>
481.wrf	16	<u>957</u>	<u>187</u>	959	186	956	187	16	<u>914</u>	<u>196</u>	915	195	912	196
482.sphinx3	16	1429	218	1427	219	<u>1427</u>	<u>219</u>	16	<u>1316</u>	<u>237</u>	1311	238	1318	237

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit  
 Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
 mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 204

Sun Blade X6440 (AMD Opteron 8384 2.7GHz)

SPECfp\_rate\_base2006 = 183

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2009

Hardware Availability: Jan-2009

Software Availability: Jun-2009

## Platform Notes

Default BIOS (BIOS Revision : 2.0.3.18) settings used except:  
DCT Unganged Mode set to "Enable"

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/data1/SPECcpu2006v1.1-pegasus215/amd0905is-libs/64:/data1/SPECcpu2006v1.1-pegasus215/amd0905is-libs/32"

NCPUS = "4"

PGI\_HUGE\_PAGES = "896"

The NFS server used was a Sun Fire X2100 M2 containing 1 x 80 GB 10 K RPM SATA disks.  
Connections to the clients were via gigabit ethernet.

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<a href="http://developer.amd.com/cpu/open64">http://developer.amd.com/cpu/open64</a>.

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain  
436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -Mnomain  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 204

Sun Blade X6440 (AMD Opteron 8384 2.7GHz)

SPECfp\_rate\_base2006 = 183

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Base Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc\_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 204

Sun Blade X6440 (AMD Opteron 8384 2.7GHz)

SPECfp\_rate\_base2006 = 183

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64

436.cactusADM: -DSPEC\_CPU\_LP64 -Mnomain

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -Mnomain

459.GemsFDTD: -DSPEC\_CPU\_LP64

465.tonto: -DSPEC\_CPU\_LP64

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32  
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64  
-Bstatic\_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic\_pgi

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 204

Sun Blade X6440 (AMD Opteron 8384 2.7GHz)

SPECfp\_rate\_base2006 = 183

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8  
 -Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc\_eh  
 -tp shanghai-64 -Bstatic\_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on  
 -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -HP:bdt=2m:heap=2m  
 -GRA:unspill=on -CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
 -OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
 -OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
 -CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on  
 -HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed  
 -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

416.gamess: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3  
 -OPT:unroll\_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0  
 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast  
 -Mipa=inline -tp shanghai-64 -Bstatic\_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)  
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
 -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8  
 -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2  
 -LNO:prefetch\_ahead=1 -CG:load\_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no\_f90\_pointer\_alias  
 -LNO:blocking=off -CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 204

Sun Blade X6440 (AMD Opteron 8384 2.7GHz)

SPECfp\_rate\_base2006 = 183

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

## Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic\_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)  
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse  
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre  
-Mfprelaxed -tp shanghai-64 -Bstatic\_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge  
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64  
-Bstatic\_pgi

## Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.20090915.html>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090915.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090915.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.20090915.xml>

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090915.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090915.xml)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp\_rate2006 = 204

Sun Blade X6440 (AMD Opteron 8384 2.7GHz)

SPECfp\_rate\_base2006 = 183

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2009

Hardware Availability: Jan-2009

Software Availability: Jun-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:45:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 September 2009.