



SPEC® CFP2006 Result


Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6440 (AMD Opteron 8389 2.9GHz)

SPECfp®_rate2006 = 210

SPECfp_rate_base2006 = 189

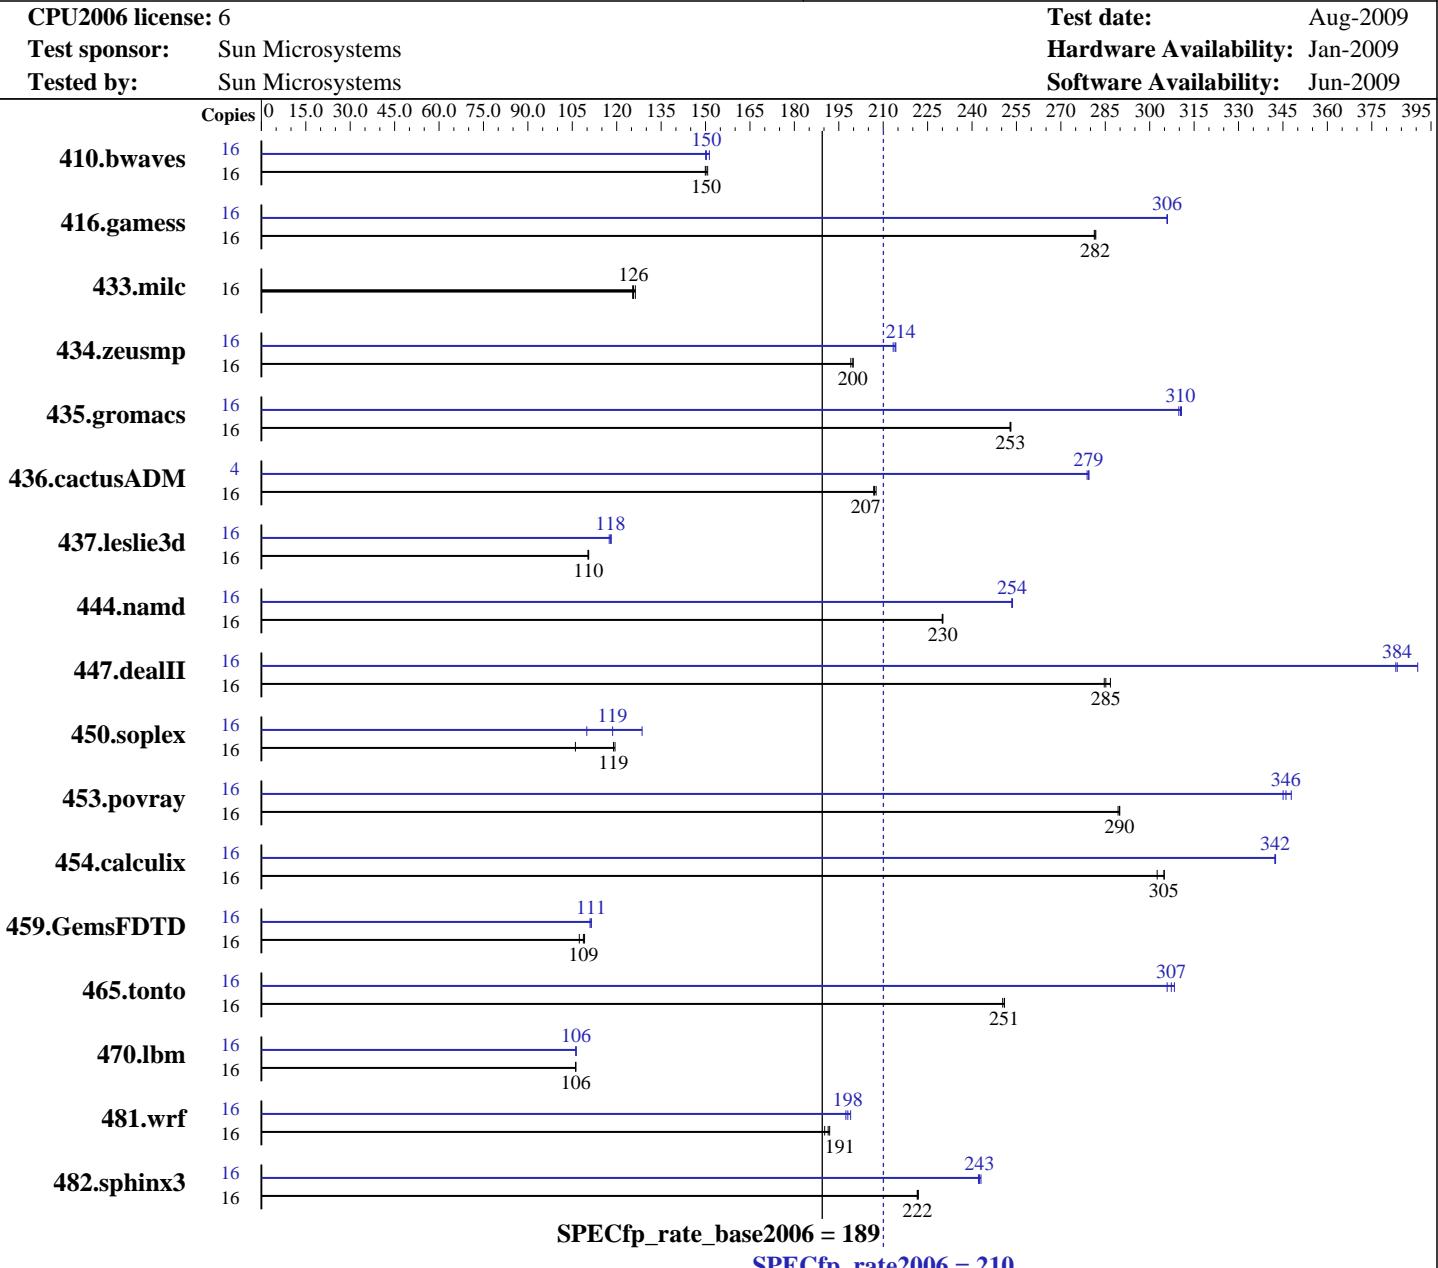

Hardware

CPU Name: AMD Opteron 8389
CPU Characteristics:
CPU MHz:
FPU: Integrated
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
CPU(s) orderable: 2 or 4 chips
Primary Cache: 64 KB I + 64 KB D on chip per core
Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5 for x86_64
Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel: Yes
File System: NFSv3
System State: Run level 3 (Full multiuser with network)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6440 (AMD Opteron 8389 2.9GHz)

SPECfp_rate2006 = 210

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
 Disk Subsystem: 1 x 80 GB 10 K RPM SATA via NFS
 Other Hardware: See additional details below

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1443	151	1448	150	1450	150	16	1449	150	1447	150	1437	151
416.gamess	16	1114	281	1112	282	1113	282	16	1024	306	1024	306	1024	306
433.milc	16	1169	126	1171	125	1163	126	16	1169	126	1171	125	1163	126
434.zeusmp	16	728	200	731	199	729	200	16	680	214	682	213	680	214
435.gromacs	16	452	253	452	253	451	253	16	369	310	368	310	368	311
436.cactusADM	16	923	207	925	207	921	208	4	171	279	171	279	171	279
437.leslie3d	16	1360	111	1363	110	1362	110	16	1273	118	1275	118	1280	117
444.namd	16	558	230	558	230	558	230	16	506	253	506	254	506	254
447.dealII	16	643	285	642	285	638	287	16	478	383	477	384	469	391
450.soplex	16	1258	106	1122	119	1117	119	16	1214	110	1125	119	1038	129
453.povray	16	294	290	294	289	294	290	16	246	346	245	348	247	345
454.calculix	16	433	305	433	305	436	303	16	386	342	386	342	385	343
459.GemsFDTD	16	1561	109	1581	107	1555	109	16	1524	111	1530	111	1524	111
465.tonto	16	629	250	627	251	627	251	16	512	307	511	308	515	306
470.lbm	16	2071	106	2071	106	2071	106	16	2069	106	2069	106	2069	106
481.wrf	16	939	190	934	191	931	192	16	898	199	905	197	902	198
482.sphinx3	16	1405	222	1408	221	1407	222	16	1288	242	1283	243	1286	243

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit
 Set vm.nr_hugepages=14336 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6440 (AMD Opteron 8389 2.9GHz)

SPECfp_rate2006 = 210

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

Platform Notes

Default BIOS (BIOS Revision : 2.0.3.18) settings used except:
DCT Unganged Mode set to "Enable"

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "896"

LD_LIBRARY_PATH = "/data1/SPECcpu2006v1.1-pegasus215/amd0905is-libs/64:/data1/SPECcpu2006v1.1-pegasus215/amd0905is-libs/32"

NCPUS = "4"

PGI_HUGE_PAGES = "896"

The NFS server used was a Sun Fire X2100 M2 containing 1 x 80 GB 10 K RPM SATA disks.
Connections to the clients were via gigabit ethernet.

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>.

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6440 (AMD Opteron 8389 2.9GHz)

SPECfp_rate2006 = 210

CPU2006 license: 6

Test date: Aug-2009

Hardware Availability: Jan-2009

Software Availability: Jun-2009

Test sponsor: Sun Microsystems

Base Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-festsse -Msmartralloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-festsse -Msmartralloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-festsse -Msmartralloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-festsse -Msmartralloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6440 (AMD Opteron 8389 2.9GHz)

SPECfp_rate2006 = 210

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartralloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartralloc -tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6440 (AMD Opteron 8389 2.9GHz)

SPECfp_rate2006 = 210

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

SPECfp_rate_base2006 = 189

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
           -Msmaralloc=huge -Mnodepchk -Mfprelaxed --zc_eh
           -tp shanghai-64 -Bstatic_pgi
```

```
447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
             -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
             -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
             -GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off
```

```
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
             -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
             -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
             -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m
```

```
453.povray: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
             -HP:bdt=2m:heap=2m
```

Fortran benchmarks:

```
410.bwaves: -fastsse -Msmaralloc -Mprefetch=nta -Mfprelaxed
             -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

```
416.gamess: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
             -OPT:unroll_size=256 -HP:bdt=2m:heap=2m
```

```
434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
             -Msmaralloc=huge -Msmaralloc=hugebss -Mipa=fast
             -Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

```
437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
               -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
               -Mvect=fuse -Msmaralloc=huge -Mprefetch=distance:8
               -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi
```

```
459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
                -LNO:prefetch_ahead=1 -CG:load_exe=0 -HP
```

```
465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
            -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP
```

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6440 (AMD Opteron 8389 2.9GHz)

SPECfp_rate2006 = 210

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmaralloc=huge -Mfrelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmaralloc=huge -Mprefetch=t0 -Mpre
-Mfrelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmaralloc=huge
-Mprefetch=distance:8 -Mfrelaxed -tp shanghai-64
-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090929.html>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090915.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.20090915.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090929.xml>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090915.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.20090915.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Blade X6440 (AMD Opteron 8389 2.9GHz)

SPECfp_rate2006 = 210

SPECfp_rate_base2006 = 189

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Sun Microsystems

Software Availability: Jun-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:02:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 September 2009.