



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp®_rate2006 = 126

H8DM8-2, AMD Opteron 2423 HE

SPECfp_rate_base2006 = 114

CPU2006 license: 001176


Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

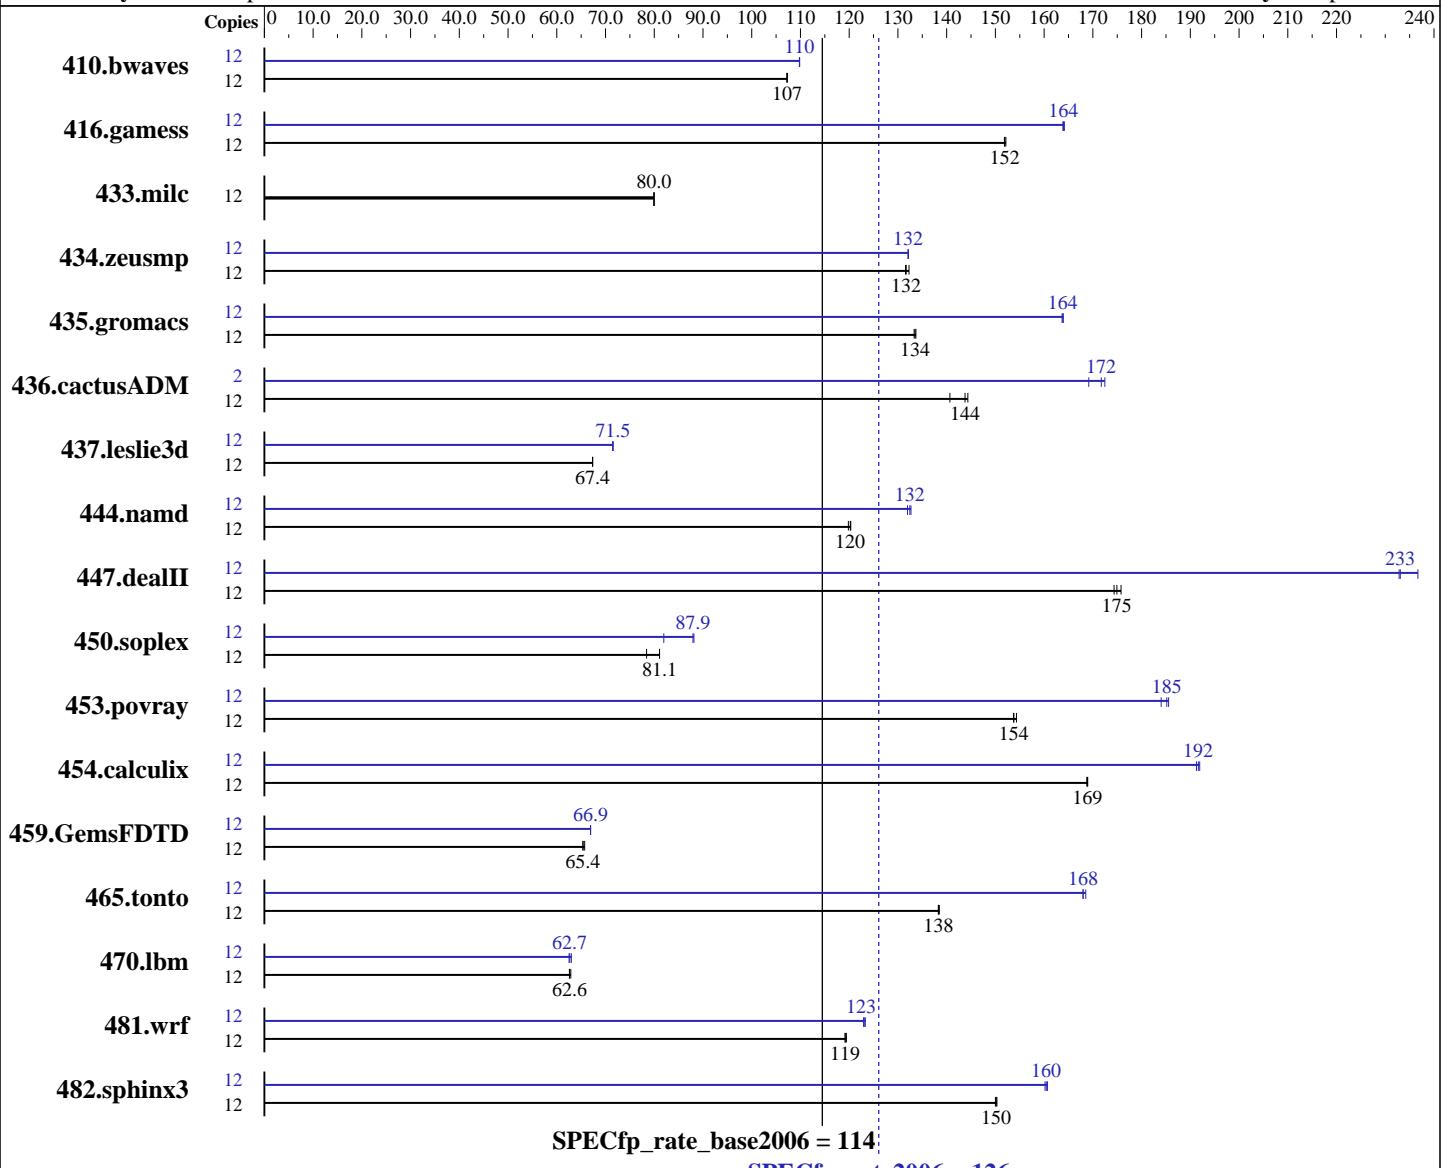

Hardware

CPU Name: AMD Opteron 2423 HE
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 2 (Local multiuser without remote network)
 Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 126

H8DM8-2, AMD Opteron 2423 HE

SPECfp_rate_base2006 = 114

CPU2006 license: 001176

Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: binutils 2.18

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|------------|------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 12 | 1520 | 107 | 1520 | 107 | 1521 | 107 | 12 | 1485 | 110 | 1485 | 110 | 1485 | 110 |
| 416.gamess | 12 | 1547 | 152 | 1546 | 152 | 1544 | 152 | 12 | 1433 | 164 | 1434 | 164 | 1431 | 164 |
| 433.milc | 12 | 1378 | 80.0 | 1378 | 79.9 | 1378 | 80.0 | 12 | 1378 | 80.0 | 1378 | 79.9 | 1378 | 80.0 |
| 434.zeusmp | 12 | 830 | 132 | 826 | 132 | 829 | 132 | 12 | 826 | 132 | 827 | 132 | 826 | 132 |
| 435.gromacs | 12 | 643 | 133 | 642 | 134 | 641 | 134 | 12 | 523 | 164 | 523 | 164 | 523 | 164 |
| 436.cactusADM | 12 | 993 | 144 | 997 | 144 | 1019 | 141 | 2 | 139 | 172 | 141 | 169 | 139 | 172 |
| 437.leslie3d | 12 | 1675 | 67.4 | 1675 | 67.3 | 1675 | 67.4 | 12 | 1577 | 71.5 | 1577 | 71.5 | 1578 | 71.5 |
| 444.namd | 12 | 803 | 120 | 800 | 120 | 800 | 120 | 12 | 729 | 132 | 725 | 133 | 727 | 132 |
| 447.dealII | 12 | 781 | 176 | 787 | 174 | 785 | 175 | 12 | 589 | 233 | 590 | 233 | 580 | 237 |
| 450.soplex | 12 | 1276 | 78.4 | 1234 | 81.1 | 1234 | 81.1 | 12 | 1221 | 82.0 | 1135 | 88.1 | 1138 | 87.9 |
| 453.povray | 12 | 415 | 154 | 415 | 154 | 414 | 154 | 12 | 345 | 185 | 347 | 184 | 344 | 186 |
| 454.calculix | 12 | 586 | 169 | 586 | 169 | 587 | 169 | 12 | 518 | 191 | 517 | 192 | 516 | 192 |
| 459.GemsFDTD | 12 | 1947 | 65.4 | 1937 | 65.7 | 1949 | 65.3 | 12 | 1902 | 66.9 | 1902 | 66.9 | 1902 | 66.9 |
| 465.tonto | 12 | 854 | 138 | 854 | 138 | 853 | 138 | 12 | 701 | 169 | 703 | 168 | 703 | 168 |
| 470.lbm | 12 | 2633 | 62.6 | 2634 | 62.6 | 2622 | 62.9 | 12 | 2618 | 63.0 | 2637 | 62.5 | 2631 | 62.7 |
| 481.wrf | 12 | 1125 | 119 | 1125 | 119 | 1122 | 119 | 12 | 1089 | 123 | 1090 | 123 | 1087 | 123 |
| 482.sphinx3 | 12 | 1556 | 150 | 1559 | 150 | 1557 | 150 | 12 | 1458 | 160 | 1460 | 160 | 1455 | 161 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

H8DM8-2, AMD Opteron 2423 HE

SPECfp_rate2006 = 126

SPECfp_rate_base2006 = 114

CPU2006 license: 001176

Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/spec/amd0905is-libs/64:/spec/amd0905is-libs/32"

NCPUS = "6"

PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>.

To ensure system stability, a 550W (minimum) ATX power supply
[4-pin (+12V), 8-pin (+12V) and 24-pin] are required.

Product description can be obtained at:

<http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DM8-2.cfm>

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

H8DM8-2, AMD Opteron 2423 HE

SPECfp_rate2006 = 126

SPECfp_rate_base2006 = 114

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

```
-fastsse -Msmartralloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fastsse -Msmartralloc=huge -Mfprelaxed --zc_eh -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fastsse -Msmartralloc=huge -Mfprelaxed -Mvect=short -Mipa=fast  
-Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fastsse -Msmartralloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline  
-tp shanghai-64 -Mvect=short -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-Mipa=jobs:4
```

C++ benchmarks:

```
-Mipa=jobs:4
```

Fortran benchmarks:

```
-Mipa=jobs:4
```

Benchmarks using both Fortran and C:

```
-Mipa=jobs:4
```

Peak Compiler Invocation

C benchmarks:

```
pgcc
```

C++ benchmarks (except as noted below):

```
openCC
```

444.namd: pgcpp

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

H8DM8-2, AMD Opteron 2423 HE

SPECfp_rate2006 = 126

SPECfp_rate_base2006 = 114

CPU2006 license: 001176

Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmaralloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmaralloc -tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

H8DM8-2, AMD Opteron 2423 HE

SPECfp_rate2006 = 126

SPECfp_rate_base2006 = 114

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jul-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
           -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
           -Msmaralloc=huge -Mnodepchk -Mfprelaxed --zc_eh
           -tp shanghai-64 -Bstatic_pgi
```

```
447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
             -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
             -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
             -GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off
```

```
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
             -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
             -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
             -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m
```

```
453.povray: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
             -HP:bdt=2m:heap=2m
```

Fortran benchmarks:

```
410.bwaves: -fastsse -Msmaralloc -Mprefetch=nta -Mfprelaxed
             -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

```
416.gamess: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
             -OPT:unroll_size=256 -HP:bdt=2m:heap=2m
```

```
434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
             -Msmaralloc=huge -Msmaralloc=hugebss -Mipa=fast
             -Mipa=inline -tp shanghai-64 -Bstatic_pgi
```

```
437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
                -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
                -Mvect=fuse -Msmaralloc=huge -Mprefetch=distance:8
                -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi
```

```
459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
                 -LNO:prefetch_ahead=1 -CG:load_exe=0 -HP
```

```
465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
              -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP
```

Benchmarks using both Fortran and C:

```
435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

H8DM8-2, AMD Opteron 2423 HE

SPECfp_rate2006 = 126

SPECfp_rate_base2006 = 114

CPU2006 license: 001176

Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

436.cactusADM: -fastsse -Mconcur -Msmaralloc=huge -Mfrelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmaralloc=huge -Mprefetch=t0 -Mpre
-Mfrelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmaralloc=huge
-Mprefetch=distance:8 -Mfrelaxed -tp shanghai-64
-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 126

H8DM8-2, AMD Opteron 2423 HE

SPECfp_rate_base2006 = 114

CPU2006 license: 001176

Test date: Jul-2009

Test sponsor: Supermicro

Hardware Availability: Jun-2009

Tested by: Supermicro

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:30:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 October 2009.